



ASX Release
24th March 2014

Listings Officer
 Company Announcements
 ASX Limited, Melbourne

AMMAROO PHOSPHATE DEPOSIT RESOURCE UPGRADE

The company is pleased to announce that the new combined Ammaroo Phosphate resource estimate has exceeded expectations and surpassed one billion tonnes. It is now the largest rock phosphate JORC 2012 resource estimate in Australia and is a deposit of global significance.

The resource upgrade vindicates the company's successful takeover last year of Central Australian Phosphate (CEN).

The total resource is now 1.08 billion tonnes P₂O₅ at an average grade of 14% P₂O₅ using a 10% cut-off or 338 million tonnes at 18% P₂O₅ using a 15% P₂O₅ cut-off.

The estimates are based on 3,246 RC holes and 88 diamond drill holes for a total of 104,500 m drilled. This resource estimation includes Measured, Indicated and Inferred resources as estimated by independent geological consultants MPR Geological Consultants Pty Ltd and is reported accordance with JORC 2012 guidelines. The break-down of the resource estimate is given in Table 1. The figures in this table are rounded to reflect the precision of the estimates and include rounding errors.

As shown in Figure 1, cultural exclusion zones determined by Traditional Owners have been excluded from the resource estimate. Future resource drilling activities will be restricted by these zones. Other cultural zones that do not affect the phosphate resource remain confidential.

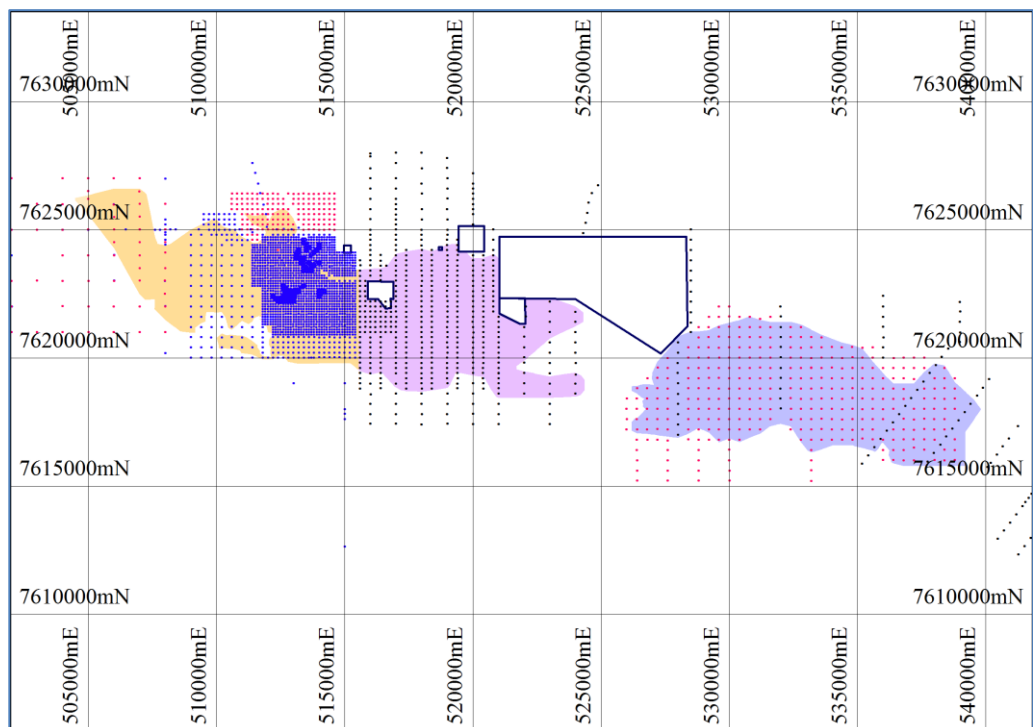


Figure 1. Ammaroo Phosphate Resource area showing drill holes and cultural exclusion zones as black polygons. Holes in drilled in 2013 in red, previous drilling by RUM as blue, and by CEN as black.

ASX ANNOUNCEMENT

ASX CODE: RUM

ABN: 33 122 131 622

REGISTERED OFFICE

20/90 Frances Bay Drive
 Stuart Park NT 0820

POSTAL ADDRESS

GPO Box 775
 Darwin NT 0801

T +61 8 89420385

F +61 8 89420318

W www.rumjungleresources.com.au

E info@rumjungleresources.com.au

DIRECTORS

Robert Annells
 Jeff Landels
 David Muller, MD
 Chris Tziolis

MAJOR PROJECTS

Ammaroo Rock Phosphate
 Karinga Lakes Brine Potash
 Ross River: IOCGU

KEY CONTACT

David Muller, MD
 T +61 (0) 458 007 040

For personal use only

Ammaroo Phosphate Resource Upgrade

No specific assumptions have been made by the company at this stage regarding proposed production levels. Metallurgical test work continues as part of the pre-feasibility study being conducted by Worley Parsons and further comment will be made upon completion of that study which is forecast due mid year.

Resources were estimated by Ordinary Kriging of one-metre downhole composited assay grades from RC and diamond drilling within mineralised domain wireframes capturing zones of continuous mineralisation grading more than approximately 10% P₂O₅ with a comparatively small internal higher grade domain interpreted at nominally 23% P₂O₅ cut off. The domains extend over approximately 36 km of strike with an average width of approximately 3 km, and an average thickness of around 7 m. The estimates extend to around 60 m depth, with approximately 90% from depths of less than 40 m. The estimates include a density of 1.7 t/bcm on the basis of 183 immersion density measurements of drill core from 43 diamond holes at Barrow Creek 1.

Estimates for mineralisation with consistent drill hole spacing of up to 100 by 100 m and 200 by 200 m are classified as Measured and Indicated respectively and estimates for more broadly sampled areas are classified as Inferred.

Cut off P ₂ O ₅ %	Category	Tonnes Mt	P ₂ O ₅ %	Al ₂ O ₃ %	CaO %	Fe ₂ O ₃ %	K ₂ O %	MgO %	MnO %	Na ₂ O %	SiO ₂ %	TiO ₂ %	U ₃ O ₈ ppm
10	Measured	134	15.4	7.32	21.0	4.76	1.09	0.78	0.17	0.19	43.8	0.39	22.9
	Indicated	80	15.3	6.92	20.9	6.53	1.41	0.83	0.21	0.21	42.0	0.39	20.0
	Inferred	870	14	7.00	19	6.5	1.4	0.7	0.2	0.2	47	0.4	26
	Total	1,084	14	7.03	19	6.3	1.4	0.7	0.2	0.2	46	0.4	25
15	Measured	60	18.4	6.69	25.0	4.00	1.01	0.68	0.15	0.19	38.9	0.35	24.5
	Indicated	38	18.2	6.15	24.7	6.48	1.25	0.71	0.21	0.21	36.8	0.34	21.3
	Inferred	240	18	6.50	24	5.8	1.2	0.6	0.2	0.2	39	0.3	30
	Total	338	18	6.49	24	5.6	1.2	0.6	0.2	0.2	39	0.3	28

Table 1. Total Phosphate Resource estimates for the Ammaroo Phosphate deposit (JORC 2012). Figures are rounded.

This document may contain forward-looking statements. Certain material factors or assumptions were applied in drawing a conclusion or making a forecast or projection as reflected in the forward-looking information. Actual values, results or events may be materially different to those expressed or implied.

The information in this report that relates to the Mineral Resource estimates is based on information compiled by Jonathon Abbott, a Competent Person who is a Member of the Australian Institute of Geoscientists. Jonathon Abbott is a full time employee of MPR Geological Consultants Pty Ltd and is an independent consultant to Rum Jungle Resources.

Mr Abbott has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Mineral Resources and Ore Reserves".

Mr Abbott consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Jonathon Abbott
Consulting Geologist
MPR Geological Consulting Pty Ltd

Ammaroo Phosphate Resource Upgrade

The information in this report that relates to exploration results and economic potential is based on information compiled by Mr David Muller, who is a Fellow of the Australasian Institute of Mining and Metallurgy.

Mr Muller is Managing Director of Rum Jungle Resources Ltd and an employee of the Company. Mr Muller has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity to which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves".

Mr Muller consents to the inclusion in this report on the matters based on their information in the form and context in which it appears.

A handwritten signature in black ink, appearing to read 'DW Muller', written in a cursive style.

DW Muller BSc, MSc, MBA, FAusIMM
Managing Director

For personal use only

JORC Code, 2012 Edition – Table 1 report template

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. 	<ul style="list-style-type: none"> Ammaroo resource drilling includes RC and diamond drilling by Rum Jungle Resources (RUM) and Central Australian Phosphate (CEN) since 2010 totalling 3,246 reverse circulation (RC holes and 88 diamond core holes for approximately 104,500 m of drilling.
	<ul style="list-style-type: none"> Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. 	<ul style="list-style-type: none"> RC and diamond holes were generally sampled over one metre down hole intervals. RC sub-samples were collected by cone or riffle splitting. Sampling of diamond drilling used various combinations of quarter and three quarter core using a diamond saw. All drilling and sampling was supervised by RUM or CEN geologists.
	<ul style="list-style-type: none"> Aspects of the determination of mineralisation that are Material to the Public Report. 	<ul style="list-style-type: none"> Hand-held XRF measurements were used to aid selection of intervals for assaying. These results were not used for resource estimation.
	<ul style="list-style-type: none"> In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information 	<ul style="list-style-type: none"> Primary samples from RUM's drilling were submitted to AMDEL Bureau Veritas laboratories for analysis by ICP. Laboratory sample preparation included jaw crushing to a nominal 2 mm and riffle spitting to 100 g and pulverizing to a nominal 90% passing 75 micron. Samples from CEN's drilling were submitted to ALS laboratories for analysis by XRF. After oven drying, samples were riffle split to 3 kg and pulverised to 85% passing 75 microns, with sub-samples assayed by XRF.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> The RC drilling utilised face sampling bits with diameters of generally 112 to 121 mm. All diamond drilling was triple tube, PQ diameter. All holes are vertical. Core was not oriented.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Core was reconstructed into continuous runs by end-matching by the site geologist. Recovered core lengths recorded by drillers were checked by site geologists and average around 94%. RC sample recovery was assessed by weighing total recovered sample material. These data show generally reasonable sample recovery, with a slight association between higher phosphate grades and lower weights. Reasons for this trend are unclear, however low weight samples represent only a small proportion of the samples, and may reflect mineralisation variability rather than a systematic bias associated with selective sample loss. Additional confirmation of the reliability of RC sampling is provided by results of 69 twinned diamond holes which show very similar average phosphate grades to the paired RC holes. The available information suggests that the RC and diamond sampling is representative and does not include a systematic bias due to preferential sample loss or gain.

Criteria	JORC Code explanation	Commentary
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> The RC and diamond holes were routinely geologically logged by industry standard methods, with logging available for around 99% of drilling. Subsamples of all RC chips were retained in chip trays for the future reference. The geological logging is qualitative in nature, and of sufficient detail to support the current resource estimates. Hand-held XRF measurements were used to aid selection of intervals for assaying. These results were not used for resource estimation.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> RC samples were collected over generally 1 m down-hole intervals and sub-sampled with a cone splitter or rarely a three tier riffle splitter. Virtually all RC samples (99.7%) were dry. Diamond core was sampled using various combinations of quarter and three quarter core using a diamond saw. Measures taken to ensure the representivity of RC and diamond sub-sampling include close supervision by field geologists, use of appropriate sub-sampling methods, routine cleaning of splitter and cyclones, and rigs with sufficient capacity to provide generally dry, high recovery RC samples. Information available to demonstrate the representivity of sub-sampling includes RC field duplicates and paired RC and diamond holes. The available information demonstrates that the sub-sampling methods and sub-sample sizes are appropriate for the grain size of the material being sampled, and provide sufficiently representative sub-samples for resource estimation.
	<ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Field XRF measurements are regarded as semi-quantitative and these results were used only to aid selection of samples for assaying. They were not included in resource estimates. Assay quality control procedures adopted by RUM and CEN include certified reference standards, blanks and external laboratory checks. These results have generally established acceptable levels of precision and accuracy for the assays included in the current estimates. Standards assay results, XRF repeats and comparisons with CaO assays suggest that ICP P₂O₅ assays from RUM's drilling are biased slightly low. For the current estimates, P₂O₅ assays were multiplied by a factor of 1.03 to compensate for this apparent bias.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. 	<ul style="list-style-type: none"> No individual drill hole results are reported in this announcement. RUM's diamond drilling includes 69 holes drilled in close proximity to RC holes drilled by RUM (65 holes) and CEN (4 holes) with an average separation of 3.9 m. Paired samples from these holes show very similar mineralisation grades and thicknesses. The sampling database is hosted in a secure, remote location and regularly backed-up by a specialist company who also undertake data entry and QA/QC.

For personal use only

For personal use only

	<ul style="list-style-type: none"> • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • Laboratory assay files are sent directly to the database custodians and merged directly into the database to avoid transcription errors. • All data entry is double checked internally and by the database custodians. • Drill data were supplied to MPR in a set of Microsoft Access format database extracts. Consistency checking between and within the database tables by MPR showed no significant inconsistencies. • For pre 2013 RUM and CEN drilling, additional database checking by MPR included comparison of the supplied assay values with original laboratory source files. These checks showed no inconsistencies.
	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	<ul style="list-style-type: none"> • Standards assay results, XRF repeats and comparisons with CaO assays suggest that the ICP P₂O₅ assays from RUM's drilling are biased slightly low. For the current estimates, P₂O₅ assays were multiplied by a factor of 1.03 to compensate for this apparent bias.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	<ul style="list-style-type: none"> • The majority of resource holes (97%) have been accurately collar surveyed by differential GPS. For the remaining holes, collar coordinates were surveyed by hand-held GPS with elevations derived from a DTM generated from differential GPS collar surveys. • No holes were down-hole surveyed. For the comparatively widely spaced and shallow vertical holes the lack of down-hole surveys does not affect confidence in resource estimates.
	<ul style="list-style-type: none"> • Specification of the grid system used. 	<ul style="list-style-type: none"> • All surveying was undertaken in Map Grid of Australia 1994 (MGA94) Zone 53 coordinates.
	<ul style="list-style-type: none"> • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • A topographic surface DTM was produced from differential GPS collar surveys. The mineralisation does not outcrop. • Topographic control is adequate for the current estimates.
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. 	<ul style="list-style-type: none"> • Drill hole spacing within the resource area varies from around 50 by 50 m, 400 by 400 m and locally broader in peripheral areas. • Measured and Indicated resources, which represent around 20% of the total estimated resources are based on 50 by 50 to 200 by 200 m spaced drilling. Mineralisation tested by broader spaced sampling is classified as Inferred with around 74% of resources based on 400 by 400 m spaced drilling, and around 6% of resources tested by drilling spaced at broader than 400 by 400 m spacing.
	<ul style="list-style-type: none"> • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	<ul style="list-style-type: none"> • The data spacing has established geological and grade continuity sufficiently for the current Mineral Resource Estimates.
	<ul style="list-style-type: none"> • Whether sample compositing has been applied 	<ul style="list-style-type: none"> • Drill hole samples were composited to 1 m down-hole intervals for resource modeling.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be 	<ul style="list-style-type: none"> • The mineralisation is flat lying to gently undulating, and perpendicular to the vertical drill holes. • The drilling orientation achieves un-biased sampling of the mineralisation.

assessed and reported if material.

<p>Sample security</p>	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> All sample collection, bagging and labeling was undertaken onsite under the supervision of RUM or CEN geological staff. All RUM and CEN RC and core samples were transported by road directly from site to the assay laboratory, with the calico bag samples sealed in polyweave bags within a bulka bag. RUM's chip trays are stored at their Alice Springs office. Unused core is stored under cover onsite at Ammaroo. Results of field duplicates and inter-laboratory checks, and the general consistency of results between sampling phases and drilling methods provide confidence in the general reliability of the resource data.
<p>Audits or reviews</p>	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> Sample data reviews have included comparisons between various sampling phases and methods which provide some confidence in the general reliability of the data. MPR geological consultants independently reviewed the quality and reliability of the resource data. These reviews included observation of drilling and sampling, review of database consistency, comparison of original laboratory source files with database entries, and review of QAQC information. MPR consider that the sample preparation, security and analytical procedures adopted for the Ammaroo drilling provide an adequate basis for the current Mineral Resource estimates.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<p>Mineral tenement and land tenure status</p>	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Ammaroo resource lies within granted exploration licenses EL 25184 held by RUM and EL 24726 which is owned by CEN (now a wholly owned subsidiary of RUM) Work was approved by the NT Department of Mines and Energy and the Central Land Council before commencement.
<p>Exploration done by other parties</p>	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Previous work on EL 24726 was undertaken and reported by CEN with RC sampling by CEN providing 15 % of the combined resource dataset. All other work on the project has been by RUM.
<p>Geology</p>	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> Ammaroo is a stratabound, sedimentary phosphate deposit located on Cambrian shoreline of the Georgina Basin. It is a similar style of mineralisation to other phosphate deposits in the Georgina Basin. Lithology is reasonably consistent across the entire deposit.
<p>Drill hole Information</p>	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar 	<ul style="list-style-type: none"> No individual drill hole results are reported in this announcement.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. ● If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	
Data aggregation methods	<ul style="list-style-type: none"> ● In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. ● Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. ● The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> ● No individual drill hole results are reported in this announcement. ● The estimated resources do not include equivalent values.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> ● These relationships are particularly important in the reporting of Exploration Results. ● If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. ● If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> ● The mineralisation is flat lying to gently undulating, and perpendicular to the vertical drill holes, with down-hole lengths representing true thicknesses.
Diagrams	<ul style="list-style-type: none"> ● Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> ● A suitable diagram is included in the announcement.
Balanced reporting	<ul style="list-style-type: none"> ● Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> ● No individual drill hole results are reported in this announcement.
Other substantive exploration data	<ul style="list-style-type: none"> ● Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> ● Mineral Resources were estimated from drill hole assay data, with geological logging used to aid interpretation of mineralised domains. Other exploration data including shallow costeans and early metallurgical test work results have previously been released to the market. Current metallurgical test work is ongoing.
Further work	<ul style="list-style-type: none"> ● The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). ● Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> ● Further extensional and infill drilling may be carried out. Diagrams of extensions will not be shown as they may be limited by/and show culturally sensitive areas that are confidential.

For personal use only

Section 3 Estimation and Reporting of Mineral Resources

(Criteria listed in section 1, and where relevant in section 2, also apply to this section.)

Criteria	JORC Code explanation	Commentary
Database integrity	<ul style="list-style-type: none"> Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used. 	<ul style="list-style-type: none"> Resources were estimated from drill hole data supplied to MPR in a set of Microsoft Access databases. Consistency checking between and within the database tables by MPR showed no significant inconsistencies. For the pre 2013 RUM and CEN drilling, additional database checking by MPR included comparison of the supplied assay values with original laboratory source files. These checks showed no inconsistencies.
Site visits	<ul style="list-style-type: none"> Comment on any site visits undertaken by the Competent Person and the outcome of those visits. If no site visits have been undertaken indicate why this is the case. 	<ul style="list-style-type: none"> Mr. Abbott visited Ammaroo from the 12th and 13th of April 2011 and the 15th to 16th of May 2012. The site visits included inspection of mineralisation exposures in costeans, and drilling and sampling activities, and discussions of the details of the project's geology and drilling and sampling with RUM and CEN geologists gaining an improved understanding of the geological setting and mineralisation controls, and the resource sampling activities.
Geological interpretation	<ul style="list-style-type: none"> Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. Nature of the data used and of any assumptions made. The effect, if any, of alternative interpretations on Mineral Resource estimation. The use of geology in guiding and controlling Mineral Resource estimation. The factors affecting continuity both of grade and geology. 	<ul style="list-style-type: none"> Geological setting and mineralisation controls of the Ammaroo mineralisation have been confidently established from drill hole logging. Resources were estimated within mineralised domain wireframes capturing zones of continuous mineralisation grading more than approximately 10% P₂O₅ with a comparatively small internal higher grade domain interpreted at nominally 23% P₂O₅ cut off. The mineralised domains were interpreted with reference to geological logging and are trimmed by areas of basement highs, where mineralisation has been not developed. The mineralised domains are consistent with the geological understanding of the flat lying, stratabound mineralisation. Due to the confidence in understanding of mineralisation controls and the robustness of the mineralisation model, investigations of alternative interpretations are unnecessary.
Dimensions	<ul style="list-style-type: none"> The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource. 	<ul style="list-style-type: none"> The combined mineralised domains trend WNW-ESE over approximately 36 km of strike with an average width of approximately 3 km. Thickness of the combined mineralised domains averages around 7 m with an average of around 23 m of barren overburden. Estimated resources extend to around 60 m depth, with approximately 90% from depths of less than 40 m.
Estimation and modelling techniques	<ul style="list-style-type: none"> The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used. 	<ul style="list-style-type: none"> Resources were estimated by Ordinary Kriging of one metre down hole composited assay grades within the mineralised domains. The models include estimates for P₂O₅, Al₂O₃, CaO, Fe₂O₃, K₂O, MgO, MnO, Na₂O, SiO₂, TiO₂ and U₃O₈. Variograms were modeled for each Krige attribute. No upper cuts were applied to the estimates. This reflects the generally moderate variability of most attributes, and ameliorates the risk of understating secondary attribute grades. Around the margins of the interpreted mineralisation, domain boundaries were generally extrapolated to a maximum of around half the drill hole spacing beyond drilling, an extrapolation distance of generally less than 200 m. Estimation included a six pass, octant based search strategy, with a hard boundary between the low grade and high grade domains.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> Grade estimation included un-folding of composite locations using the top of the mineralised domain as a reference surface. Micromine software was used for data compilation, domain wire-framing, and coding of composite values, and GS3M was used for resource estimation. The estimation technique is appropriate for the mineralisation style.
	<ul style="list-style-type: none"> <i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i> 	<ul style="list-style-type: none"> With areas of consistent coverage, the current estimates are consistent with previous resource estimates or Barrow Creek 1 and Arganara. There has been no production from the project.
	<ul style="list-style-type: none"> <i>The assumptions made regarding recovery of by-products.</i> <i>Estimation of deleterious elements or other non-grade variables of economic significance (eg sulphur for acid mine drainage characterisation).</i> 	<ul style="list-style-type: none"> In addition to P₂O₅, the resource model includes estimates, Al₂O₃, CaO, Fe₂O₃, K₂O, MgO, MnO, Na₂O, SiO₂, TiO₂ and U₃O₈ grades. Estimated resources make no assumptions about recovery of by-products.
	<ul style="list-style-type: none"> <i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i> 	<ul style="list-style-type: none"> Resources were estimated into 25 by 25 by 1 m blocks (east, west, vertical). Planview dimensions of the blocks approximate half the drill hole spacing in the closest drilled portions of the deposit. Grade estimation included a six pass, octant based search strategy. Search ellipsoid radii (east, west, vertical) and minimum data requirements range from 75 by 75 by 2m (8 data) for search 1 to 600 by 600 by 8 m (2 data) for search 6.
	<ul style="list-style-type: none"> <i>Any assumptions behind modelling of selective mining units.</i> 	<ul style="list-style-type: none"> The estimates are intended to reflect medium to large scale open pit mining, with ore definition by close spaced grade control sampling and tight vertical selectivity. Details of potential mining parameters are unclear reflecting the early stage of project evaluations.
	<ul style="list-style-type: none"> <i>Any assumptions about correlation between variables.</i> 	<ul style="list-style-type: none"> The modeling did not include specific assumptions about correlation between variables.
	<ul style="list-style-type: none"> <i>Description of how the geological interpretation was used to control the resource estimates.</i> 	<ul style="list-style-type: none"> The mineralised domains used for resource estimation are consistent with geological interpretation of mineralisation controls.
	<ul style="list-style-type: none"> <i>Discussion of basis for using or not using grade cutting or capping.</i> 	<ul style="list-style-type: none"> No upper cuts were applied to the estimates. This reflects the generally moderate variability of most grade attributes, and ameliorates risk of understating secondary attribute grades.
	<ul style="list-style-type: none"> <i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i> 	<ul style="list-style-type: none"> Model validation included visual comparison of model estimates and composite grades, and trend (swath) plots. No production data is available.
Moisture	<ul style="list-style-type: none"> <i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i> 	<ul style="list-style-type: none"> Tonnages are estimated on a dry tonnage basis.
Cut-off parameters	<ul style="list-style-type: none"> <i>The basis of the adopted cut-off grade(s) or quality parameters applied.</i> 	<ul style="list-style-type: none"> The cut off grades used for resource reporting reflect RUM's interpretation of potential project economics for a large scale operation feeding a beneficiation plant and/or phosphoric acid plant and are consistent with other JORC Georgina Basin phosphate resources.
Mining factors or assumptions	<ul style="list-style-type: none"> <i>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for</i> 	<ul style="list-style-type: none"> Details of potential mining parameters are unclear reflecting the early stage of project evaluations. The estimates are intended to reflect medium to large scale open pit mining. With a maximum depth of 60 m, and around 90% of resources from depths of less than 40 m, the

Criteria	JORC Code explanation	Commentary
	<p><i>eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</i></p>	<p>resources appear amenable to open pit mining.</p>
Metallurgical factors or assumptions	<ul style="list-style-type: none"> <i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i> 	<ul style="list-style-type: none"> Exact economic cut-off grades are not yet known, nor are phosphate recoveries, however beneficiation of ore will enable ore to be upgraded to a suitable specification for sale or as feed to a phosphoric acid plant. Metallurgical test work is ongoing as part of a pre-feasibility study currently in progress. A number of processing options are being considered.
Environmental factors or assumptions	<ul style="list-style-type: none"> <i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i> 	<ul style="list-style-type: none"> Environmental studies and process route testing are ongoing as part of a pre-feasibility study currently in progress. Baseline flora and fauna studies have not indicated any impediments to mining or processing at this stage.
Bulk density	<ul style="list-style-type: none"> <i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</i> <i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</i> <i>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</i> 	<ul style="list-style-type: none"> The estimates include a density of 1.7 t/bcm for all material. This value was derived from 183 wax coated immersion density measurements of oven-dried drill core from 43 diamond holes at Barrow Creek 1.
Classification	<ul style="list-style-type: none"> <i>The basis for the classification of the Mineral Resources into varying confidence categories.</i> 	<ul style="list-style-type: none"> The estimates are classified as Measured, Indicated and Inferred on the basis of estimation search pass and a set of polygons defining areas of relatively consistent drill hole spacing. Estimates for mineralisation with consistent drill hole spacing of up to 100 by 100 m and 200 by 200 m are classified as Measured and Indicated respectively and estimates for more broadly sampled areas are classified as Inferred.
	<ul style="list-style-type: none"> <i>Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in</i> 	<ul style="list-style-type: none"> The resource classification accounts for all relevant factors.

For personal use only

Criteria	JORC Code explanation	Commentary
	<p><i>continuity of geology and metal values, quality, quantity and distribution of the data).</i></p> <ul style="list-style-type: none"> • <i>Whether the result appropriately reflects the Competent Person's view of the deposit.</i> 	<ul style="list-style-type: none"> • The resource classifications reflect the competent person's views of the deposit.
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of Mineral Resource estimates.</i> 	<ul style="list-style-type: none"> • The resource estimates have been reviewed by RUM geologists, and are considered to appropriately reflect the mineralisation and drilling data.
Discussion of relative accuracy/confidence	<ul style="list-style-type: none"> • <i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</i> • <i>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i> • <i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i> 	<ul style="list-style-type: none"> • Confidence in the relative accuracy of the estimates is reflected by the classification of estimates as Measured, Indicated and Inferred.

For personal use only