



**ASX/Media Release**

**(ASX: MZN)**

**16 April 2018**

Marindi Metals Ltd  
ABN 84 118 522 124

Level 3, 35 Havelock Street  
West Perth WA 6005  
Australia

**Contact:**

**Joe Treacy**  
Managing Director

Phone: 08 9322 2338  
Email : info@marindi.com.au

**Directors:**

John Hutton  
Geoff Jones  
Joe Treacy

**Issued Capital:**

1,780,460,084 fully paid ordinary  
shares

66m unlisted options Ex. 2.5c Expiring  
31 December 2019

## **Major New Lithium Target Identified at Forrestania**

- Tillerson anomaly located 6km and 3km south-east respectively of the Earl Grey and Bounty LCT pegmatite deposits
- Soil anomaly peaking at 17.9ppm Ta and 5.4ppm Be
- Specialised pegmatite float located at surface
- Located proximal to north-south trending shear
- Target scheduled for drilling as part program announced

Marindi Metals Limited (ASX:MZN, "Marindi") is pleased to report it has identified a major new lithium target following receipt of the latest results of infill soil sampling and reconnaissance investigations at the Mt Holland area, within the Company's Forrestania Lithium Project.

Soil sampling was originally carried out on east-west lines at 100m centres on a grid lines 800m apart. This sampling has delineated a large anomaly (Tillerson) over 3km with coincident Lithium (Li), Beryllium (Be), Caesium (Cs) and Tantalum (Ta).

Infill soil sampling at 400m spaced lines was designed to better define the anomaly. This infill sampling was successful, indicating that the highest priority area is located in the north of the Tillerson Anomaly where elevated Ta and Be overlap, peaking at levels of 17.9ppm Ta and 5.4ppm Be.

The Tillerson anomaly is covered by residual soils with little outcrop and cut by a north-south trending shear which is considered a favourable position for pegmatites. A reconnaissance trip to this area located extensive quartz and occasional pegmatitic material as float. Two float samples HOL001 and HOL002 (refer attached plan) returned highly elevated Ta, Cs, Be and Tin (Sn) with lithium in spodumene not expected to survive the weathering process. Potassium/Rubidium (K/Rb) and Potassium/Caesium (K/Cs) analysis has confirmed these samples fall within the specialised pegmatite field similar to the neighbouring Lithium-Caesium-Tantalum "LCT" pegmatite deposits of Earl Grey and Bounty, respectively

located only 6km and 3km north west from the Tillerson Anomaly.

The Tillerson anomaly is extensive and extensions to this anomaly can be interpreted to occur several kilometres to the south (refer attached plan). The Mt Holland area is covered by the first of the Programs of Work (POWs) applications submitted by Marindi in support of the planned major reconnaissance drill program announced on 10 April 2018. Consequently, this area is expected to be the first to be tested by the planned aircore drilling. The program will test the Tillerson anomaly and its potential extensions, in addition to a gold anomaly also referred to in the prior announcement.

Marindi looks forward to the commencement of the drilling program, subject to the receipt of relevant approvals.

**Joe Treacy**  
**Managing Director and CEO**

**Investor Inquiries**  
Marindi Metals Limited  
08 9322 2338

**Media Inquiries**  
Empeiros Advisory  
John Phaceas  
0411 449 621  
[john.phaceas@empeirosadvisory.com.au](mailto:john.phaceas@empeirosadvisory.com.au)


#### **Competent Persons Statement**

Information in this release that relates to Exploration Results is based on information prepared by Mr Joseph Treacy a Member of the Australasian Institution of Mining and Metallurgy and the Australian Institute of Geoscientists Mt Treacy is the Managing Director of Marindi Metals Ltd, a full-time employee and shareholder. Mr Treacy has sufficient experience which is relevant to the styles of mineralisation and types of deposits under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Treacy consents to the inclusion in this release of the matters based on his information in the form and context in which it appears.

**Table 1 – Pegmatite Float Samples**


Sample ID	Be (ppm)	Cs (ppm)	K (%)	Li (ppm)	Nb (ppm)	Rb (ppm)	Sn (ppm)	Ta (ppm)	Easting	Northing
HOL001	11.85	352	2.55	10.1	56.5	1400	49.6	52.7	764,560	6,443,844
HOL002	51.6	243	2.93	17.1	70.3	1650	82.7	80.3	764,615	6,443,773

**Figure 1 – Forrestania Lithium Project**

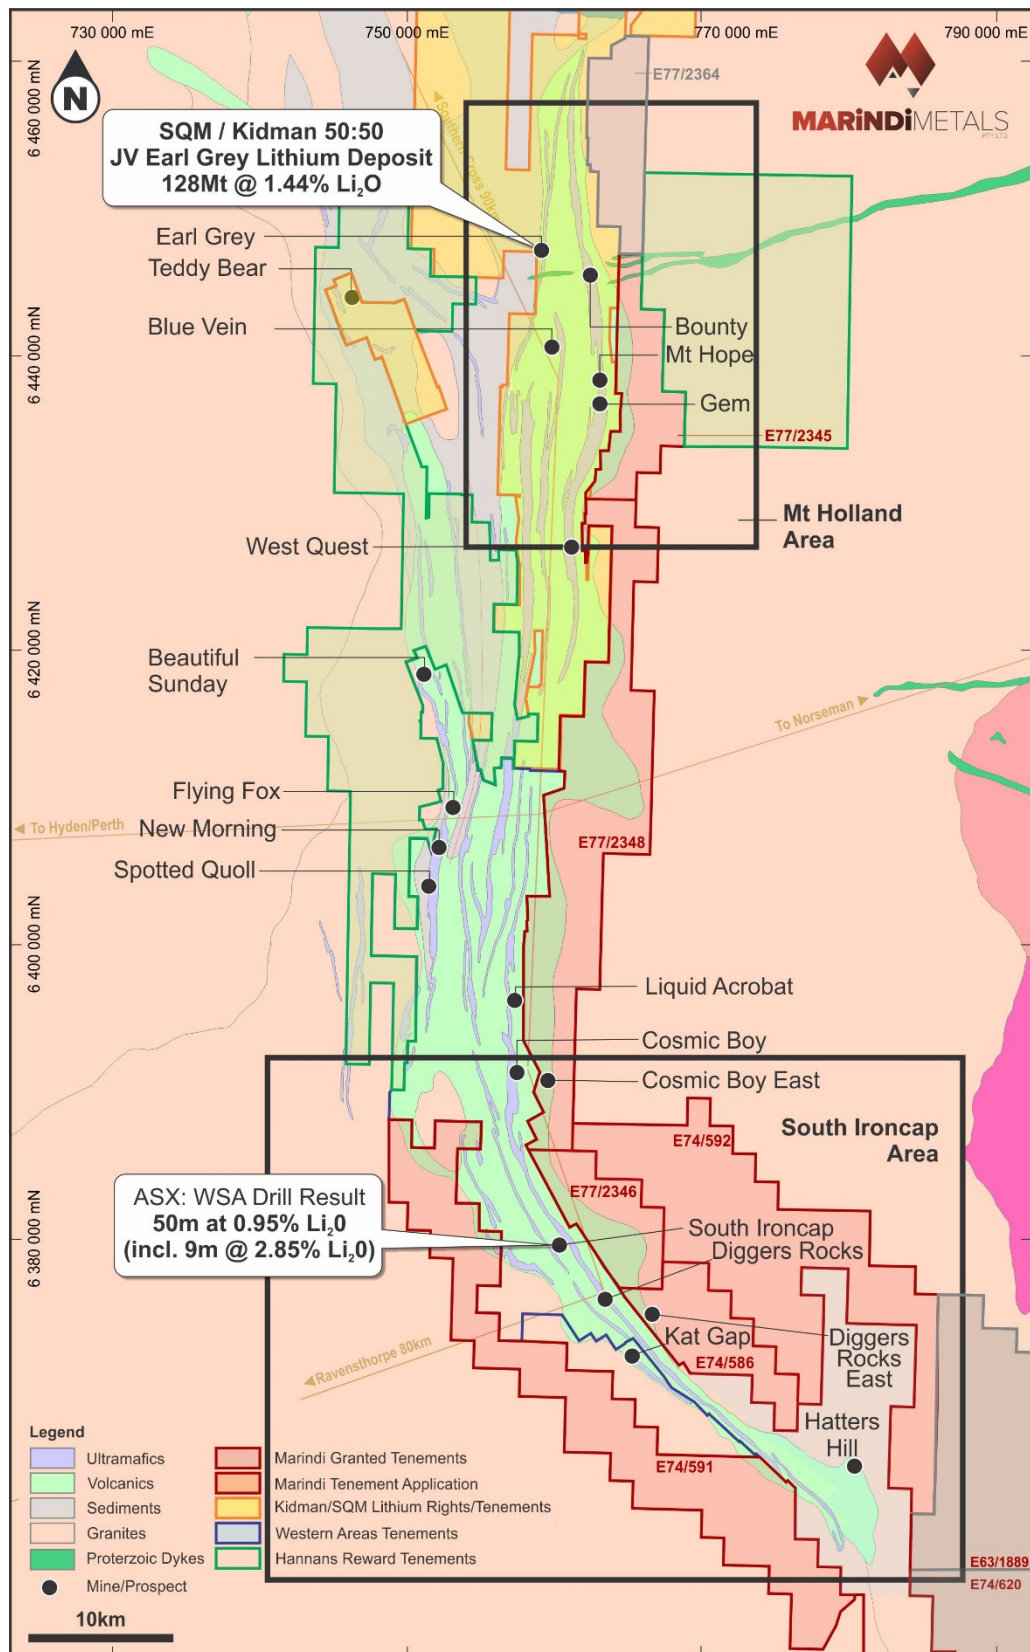



**Figure 2 – Mt Holland Lithium Targets**

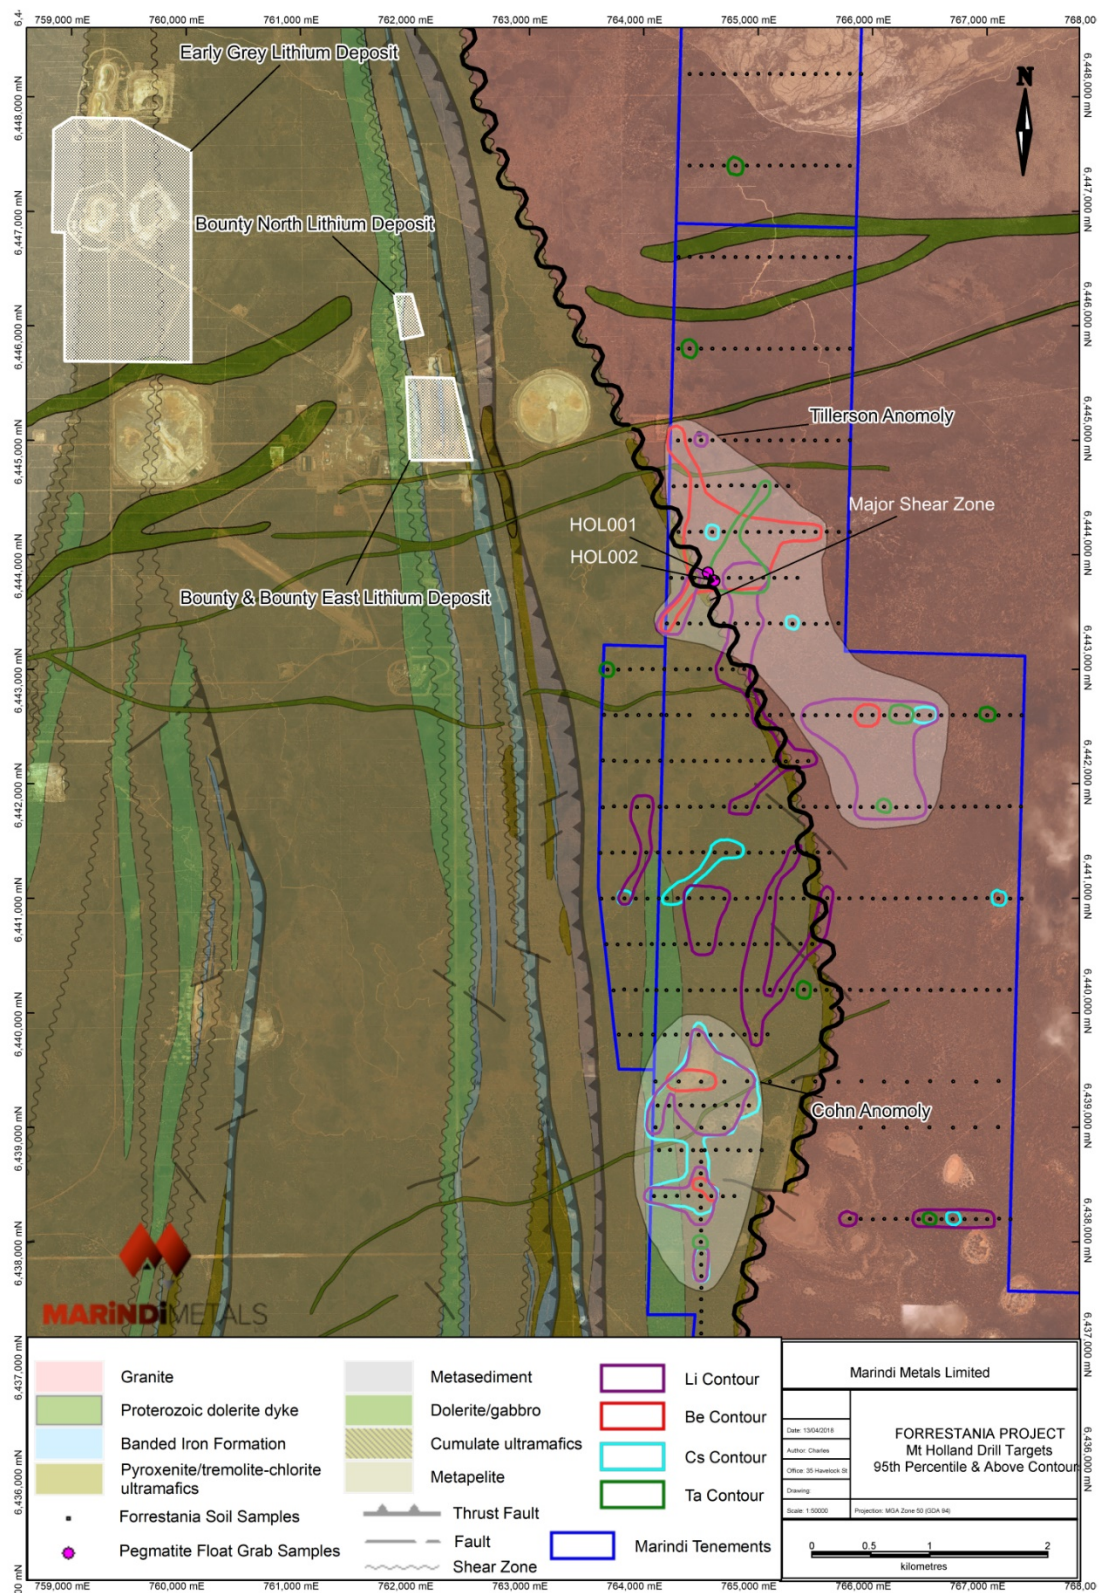

## Appendix 1 – JORC TABLE 1

### Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li><i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down-hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></li> <li><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></li> <li><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></li> <li><i>In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i></li> </ul>	<ul style="list-style-type: none"> <li>Soil samples are located using a hand held GPS. Sites are cleaned of organic matter. A pit is dug down to 10cm and a sample is put through a 1.6mm Sieve. Approximately 30g of the sieved sample is collected in a geochem bag.</li> <li>Duplicates are taken every 40<sup>th</sup> sample. To assess the soil geochemistry repeatability and the XRF analytical repeatability.</li> </ul>
Drilling techniques	<ul style="list-style-type: none"> <li><i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).</i></li> </ul>	N/A to this release

Criteria	JORC Code Explanation	Commentary
Drill sample recovery	<ul style="list-style-type: none"> <li>• <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></li> <li>• <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></li> <li>• <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></li> </ul>	<ul style="list-style-type: none"> <li>• N/A to this release</li> </ul>
Logging	<ul style="list-style-type: none"> <li>• <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></li> <li>• <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged.</i></li> </ul>	<ul style="list-style-type: none"> <li>• The topographical setting is recorded for each soil sample, eg “steep slope facing East”.</li> </ul>
Subsampling techniques and sample preparation	<ul style="list-style-type: none"> <li>• <i>If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i></li> <li>• <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li>• <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Soil samples are located using a hand held GPS. Sites are cleaned of organic matter. A pit is dug down to 10cm and a sample is put through a 1.6mm Sieve. Approximately 30g of the sieved sample is collected in a geochem bag.</li> <li>• An orientation survey over a mineralised horizon was completed prior to deciding the appropriate fraction size to assess for a base metal suite. A 1.6mm Sieve is moderate to coarse fraction and is considered appropriate for pegmatitic minerals.</li> <li>• Duplicates are taken every 40 samples. To assess the soil geochemistry repeatability.</li> </ul>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <li>• <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></li> <li>• <i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Samples are analysed via a 4 acid digest with an ICP-MS finish. This method is considered to be a total analysis of the sample with 48 elements assayed for. Samples were also assayed for trace level Au via a 25g fire assay. The analysis is completed by an industry leading laboratory. Each batch of samples analysed has several standards, blanks and duplicates included.</li> </ul>

Criteria	JORC Code Explanation	Commentary
Quality of assay data and laboratory tests (Cont'd)	<ul style="list-style-type: none"> <li><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></li> </ul>	<ul style="list-style-type: none"> <li>The analysis is completed by an industry leading laboratory. Each batch of samples analysed has several standards, blanks and duplicates included.</li> </ul>
Verification of sampling and assaying	<ul style="list-style-type: none"> <li><i>The verification of significant intersections by either independent or alternative company personnel.</i></li> <li><i>The use of twinned holes.</i></li> <li><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> <li><i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>Data have been verified by Marindi personal and contract professionals.</li> <li>Follow up soil sampling around anomalies is planned for the near future to confirm repeatability of anomalous samples and continuity between samples.</li> <li>No adjustment to assay data has occurred.</li> </ul>
Location of data points	<ul style="list-style-type: none"> <li><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> <li><i>Specification of the grid system used.</i></li> <li><i>Quality and adequacy of topographic control.</i></li> </ul>	<ul style="list-style-type: none"> <li>Soil sample sites are located using a Garmin hand held GPS. Accuracy is assumed to be within +- 4m. Sites are measured in GDA94, MGA Zone 50.</li> </ul>
Data spacing and distribution	<ul style="list-style-type: none"> <li><i>Data spacing for reporting of Exploration Results.</i></li> <li><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li><i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>The soil grid is 800m x 100m. Soil sample spacing is defined by geological criteria and is regarded as appropriate to establish first pass geochemical anomalies. Spacing is shown in the accompanying figures.</li> </ul>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <li><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>No orientation based sampling bias has occurred.</li> </ul>
Sample security	<ul style="list-style-type: none"> <li><i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>Appropriate security measures are taken to dispatch samples to the laboratory. Chain of custody of samples are managed by Marindi Metals. Samples are stored onsite and transported to the laboratory by contractors. The laboratory issues a receipt and a reconciliation of delivered samples against the laboratory analysis submission form from Marindi Metals.</li> </ul>
Audits or reviews	<ul style="list-style-type: none"> <li><i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>Marindi Metals have not completed any external audits or reviews of the sampling techniques and data.</li> </ul>



**Section 2 Reporting of Exploration Results**  
(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code Explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The Forrestania Project comprises of 6 granted exploration tenements E77/2345, E77/2348, E77/2346, E77/592, E77/586, E77/591, 1 mining lease M77/549 and 1 application for an exploration tenement E77/2364. All tenements are held by Forrestania Pty Ltd with the exception of M77/549 which Marindi has an option to purchase. No soil sampling was completed in M77/549.</li> </ul>
Exploration done by other parties	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>No pegmatite exploration has been conducted over the soil sample program area. Small pockets of land have been explored for gold and nickel. Historic data is very limited.</li> </ul>
Geology	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The mineralisation sought is Lithium-Caesium- Tantalum “LCT” style pegmatite. These specialised pegmatites are known to occur in various geological rock types throughout the Forrestania greenstone belt.</li> </ul>
Drill hole Information	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>N/A to this release</li> </ul>



Criteria	JORC Code Explanation	Commentary
Data aggregation methods	<ul style="list-style-type: none"> <li><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</i></li> <li><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></li> <li><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></li> </ul>	<ul style="list-style-type: none"> <li>Geochemical anomalies are expressed as a percentage relative to background. Anomalous areas are defined as being in excess of the 95 percentile of results received. This is also compared to orientation surveys of mineralised pegmatitic terrain in the Forrestania belt.</li> </ul>
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <li><i>These relationships are particularly important in the reporting of Exploration Results.</i></li> <li><i>If the geometry of the mineralisation with respect to the drill-hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></li> </ul>	<ul style="list-style-type: none"> <li>N/A to this release</li> </ul>
Diagrams	<ul style="list-style-type: none"> <li><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></li> </ul>	<ul style="list-style-type: none"> <li>Appropriate maps with scale are included within the body of the accompanying document.</li> </ul>
Balanced reporting	<ul style="list-style-type: none"> <li><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></li> </ul>	<ul style="list-style-type: none"> <li>The accompanying document is considered to represent a balanced report.</li> </ul>
Other substantive exploration data	<ul style="list-style-type: none"> <li><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></li> </ul>	<ul style="list-style-type: none"> <li>Other exploration data collected is not considered as material to this document at this stage. Further data collection will be reviewed and reported when considered material.</li> </ul>

Criteria	JORC Code Explanation	Commentary
Further work	<ul style="list-style-type: none"> <li><i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step out drilling).</i></li> <li><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<ul style="list-style-type: none"> <li>Marindi advise that geochemical assessment of the tenements is ongoing.</li> </ul>