

ASX: ARV ATY: FRANKFURT

Base, Battery and Precious Metals

ARTEMIS RESOURCES LIMITED IS AN AUSTRALIAN MINERAL DEVELOPER ADVANCING ITS WEST PILBARA BASE METALS, BATTERY AND PRECIOUS METALS ASSETS TOWARDS PRODUCTION.

ARTEMIS HAS CONSOLIDATED A MAJOR LAND HOLDING IN THE WEST PILBARA AND IS THE 100% OWNER OF THE RADIO HILL OPERATIONS AND PROCESSING INFRASTRUCTURE, STRATEGICALLY LOCATED 30 KM FROM THE CITY OF KARRATHA, THE POWERHOUSE OF THE PILBARA.

WANT TO KNOW MORE ABOUT ARTEMIS?

Please Contact:

Wayne Bramwell – Chief Executive Officer
E: wayne bramwell@artemisresources.com.au
P: +61 417 953 073

Edward Mead – Executive Director E: Ed.Mead@artemisresources.com.au

P: +61 407 445 351

David Tasker – Media Advisor :: dtasker@chapteroneadvisors.com.au

P:+61 433 112 936

Or visit the Artemis Website

follow us on Twitter.

Artemis Resources Limited

ARBN: 80 107 051 749 Suite1, 11 Ventnor Ave, West Perth WA, Australia, 6005

P:+61863190000

E: info@artemisresources.com.au Web: www.artemisresources.com.au

Overview

ASX / Media Announcement

10 July 2018

UPDATE ON SUPER-DEEP HOLE IN WEST PILBARA - Western Australia -

Artemis Resources Limited ("Artemis" or "the Company") (ASX: ARV) is pleased to provide this update on ASD-1, the West Pilbara super-deep diamond drill hole.

Diamond Drill Hole – ASD-1 Super Deep Hole		
Date	10 July 2018	
Time	6 pm WST	
Drill Size (outside diameter)	PQ (~122.6mm)	
	(0-500m)	
Drill Size (outside diameter)	HQ (~96mm)	
	(500m - TBA)	
Current Depth of Drill hole	943.5 metres	

Highlights

- On the 3rd July 2018, ASD-1 was at a depth of 595 metres and within the Hardey Formation (a series of interbedded sediments and tuffs).
- At a depth of 644.4 metres the lithology of ASD-1 changed with an intermediate-felsic intrusive (Diorite - Granodiorite) being intersected.
- The change in geology from Hardey Formation at such a shallow depth was unexpected, with alteration and bleaching and a number of quartz veins being observed.
- At a depth of 901.6 metres the geology changed again to narrow dolerite dykes intersecting the intermediate-felsic intrusive (Diorite-Granodiorite) (Figure 1).

A number of varied intrusion lithologies have now been observed, which is an exciting development. The presence of these intrusive bodies in the basin is supportive of existing mineralisation in the region. The company is encouraged by results to date and will seek to reinterpret the area for further mineralisation as information from this drill hole is received.

Figure 1: Core photo from ASD-1 at circa 900 metres depth.





ASD-1 is planned for a vertical depth of +3,300m and designed to test the many rock sequences in the Pilbara Basin from surface and deep into the basement's geology. These rock sequences are currently not known, or are interpreted or inferred to exist based on very sparse data that does not explain observed surface mineralisation for Diamonds, Cobalt, Zinc, Lead and Gold.

Drill core from the hole is being moved from the drill site to Artemis's Radio Hill Operations, located some 43 km to the north, where core is being logged and photographed. The whole core will then be sent to the GSWA's Perth Core Library for analysis. The current drilling rate has reduced to 25m/shift due to ground hardness.

ASD-1 is located on E47/3707 (co-ordinates 480100mE, 7637370mN, 330m RL, Azi: 180, Dip: -85 degrees, Estimated Depth: 3,300m), some 43km south of Artemis' Radio Hill Mine in the West Pilbara, of Western Australia. (Refer to previous Artemis news release, dated 22 March 2018 for further details on ASD-1).

Figures 2, **3 and 4** highlights the CRA diamond drill hole DDH 84 MF1 that was drilled in 1986, which now resides at the WA Core Library.

Figure 2: Interpretative Long-Section. North south orientation of section with Munni Munni and Purdy's Reward to the north (right side of image) as the basin shallows.

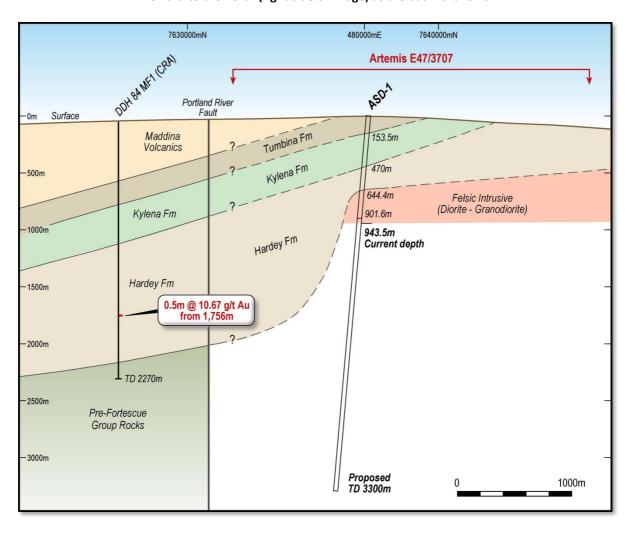




Figure 3: Summary drill logs for CRAE drill hole and progress summary drill log for Artemis's ASD-1. Geology comparison.

DDH 84 MF1 (after CRAE)


		,	
Depth (m)	Stratigraphic Unit	Lithology	Rock Type
	Maddina Basalt (Maddina Fm)		Amygdaloidal and massive basalt 538 m
- - -	Pillingini Tuff (Tumbiana Fm)		Tuffs, partially stromatolitic, epislastic sandstone, siltstones and shales 731 m
-750 - - - - - - - 1000	Kylena Basalt (Kylena Fm)		Amygdaloidal, massive and pillowed basalt, interbedded tuff
_		******* ******* *******	Tuffs, lithic sediments
- -1250 - - -			Tuffaceous sandstone, tuffs 1500 m
-1500 - - - - - - -1750	Cliff Springs Fm (Hardey Fm)	/	Tuffaceous grits, diamictites and pepple conglomerate
- - - - -2000			0.5m @ 10.67 g/t Au in Conglomerates from 1,756m
_ _ _ _2250	Pre-Fortescue Group Rocks	A A A A A A A A A A A A A A A A A A A	Basalt boulder breccia 2133 m Pillow basalts, cherts
_			EOH 2270 m

ASD-1

Stratigraphic Unit	Lithology	Rock Type
Tumbiana Fm		Tuffaceous sediments, minor lapilli tuff and laminated shales 153.5 m
Kylena Fm		Amygdaloidal, massive basalt, interbedded tuffs 470 m
Hardey Fm	Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y	Tuffs, lithic sediments
	+ ************************************	Intermediate-felsic intrusive (Diorite - Granodiortie) with alteration and bleaching and a number of narrow quartz veins 901.6 m
	*	943.5 m - Current depth Intermediate-felsic intrusive (Diorite - Granodiortie) with narrow dolerite dykes Proposed depth 3300 m
	Tumbiana Fm Kylena Fm	Tumbiana Fm



Figure 4: Artemis's Tenements in the Karratha Area

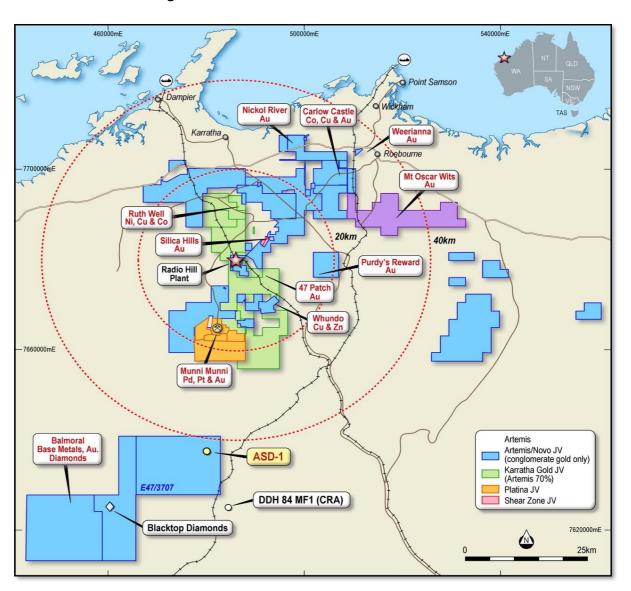

CONTACTS:

For further information on this update or the Company generally, please visit our website at www.artemisresources.com.au, or contact:

Investors / Shareholders

- Edward Mead Executive Director / T: +61 407 445 351 / E: Ed.Mead@artemisresources.com.au
- Wayne Bramwell CEO / T: +61 417 953 073 / E: Wayne.Bramwell@artemisresources.com.au

Media Advisor / Chapter One Advisors

David Tasker – Media Advisor / T: +61 433 112 936 / Email: dtasker@chapteroneadvisors.com.au

COMPETENT PERSONS STATEMENT:

The information in this document that relates to Exploration Results and Exploration Targets is based on information compiled or reviewed by Edward Mead, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Mead is a Director of Artemis Resources Limited and is a consultant to the Company, and is employed by Doraleda Pty Ltd. Mr Mead has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Mead consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.



AUO BSM | MUS BOL JOL

Appendix 1: CRAE Collar Location & Significant Analyses from DDH84MF#1 drilled in 1984-85, reported in 1987.

Hala ID	Hole	Max	NACA N	MCA F	l akiku da	l a saik sala	From	To	Au	Au (ppm)
Hole_ID	Type	Depth	MGA_N	MGA_E	Latitude	Longitude	(M)	(M)	(ppm)	(rpt)
DDH84MF#1	DDH	2270	7627119	484459	-21° 27.5"	116° 51"	1756	1756.5	10.67	11.7

Note: Latitude /Longitude converted to MGA Zone 50 co-ordinates by Artemis personnel.

JORC Code, 2012 Edition - Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	 CRA drillhole Sampling was undertaken diamond core drilling Diamond drill core was cut in half with a diamond blade on nominal 0.5 metre interval, or the lithological contacts. Sampling was carried out using protocols established by CRA Exploration at the time. ASD-1 No sampling undertaken
Drilling techniques	 Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core 	 CRA drillhole Diamond drilling has been undertaken by Rockdrill Pty Ltd Drilling was Reverse Circulation



Criteria	JORC Code explanation	Commentary
	depth of diamond tails, face- sampling bit or other type, whether core is oriented and if so, by what method, etc).	to 960.5m and NQ diamond drilling to 2269.95m. ASD-1 Diamond drilling from surface is being undertaken by DDH 1 Drilling Pty Ltd. All core to date is PQ which is intended to be finished at 600m, when core size will change to HQ.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	 CRA drillhole Diamond drilling recovery has generally been excellent and close to 100%. The core is measured against core blocks placed at the end of each drill rod pull. ASD-1 Diamond drill recovery to date is excellent at 100%. Core is measured and marked against core blocks.
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 Diamond core is lithologically logged. ASD-1 Diamond core is lithologically logged.
Sub-sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	CRA drillhole Diamond core is cut using the shimming technique where approx. a third was taken from the core.



AJUO BSN IBUOSJBO JOL

Criteria	JORC Code explanation	Commentary
	 Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	
Quality of assay data and	The nature, quality and	<u>CRA drillhole</u>
laboratory tests	appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	 Diamond core analysis is by Analabs (Perth). The laboratory techniques below are for all samples submitted to
	 For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibration factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 Crush to -2 mm and pulverised to 95% passing 75 microns Au – 30gm fire assay/AAS Co, Cu, Ni, Pb, Zn, Ag – Perchloric acid/AAS Ba, U – Pressed der XRF. Use of standards was not reported. Use of duplicates was not reported.
Verification of sampling	The verification of significant	No assaying completed. CRA drillhole
and assaying	 intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physica and electronic) protocols. Discuss any adjustment to assay data. 	 All geological logging was typed into hard copy records. Hard copy of analytical results included in report. ASD-1 No assaying completed.
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches mine workings and other location used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	•



	П
1	

Criteria	JORC Code explanation	Commentary
		Zone 50 UTM
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geologica and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	CRAE drill hole and comparisons on exploration are being made with information that also relates to geology at Munni Munni and at
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported material. 	 CRA drillhole Diamond drill hole was vertical to intersect the stratigraphy, orientations at depth were unknown at commencement. ASD-1 The Diamond drill hole is being drilled at -85 degrees and the core is being orientated. Geological structure will be captured.
Sample security	The measures taken to ensure sample security.	 CRA drillhole Core is now held in WA Core Library. ASD-1 The drill hole core is being trucked to the WA Core Library.
Audits or reviews	 The results of any audits or reviews of sampling techniques and data. 	 CRA drillhole Not reported. ASD-1 No sampling reported as not completed at this stage.



AIUO BSM | IBUOSJBO JO =

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 CRA drillhole The tenement was historically called EL47/182, was an application at time of drilling held by CRA Exploration Pty Ltd. ASD-1 and Balmoral Project The Balmoral Project consists of E47/3707, E47/3708 and E47/3709 covering a total of 599km². ASD-1 is on E47/3707. All tenements are in good standing. The tenements are 100% owned by KML no2 Pty Ltd, a 100% owned subsidiary of Artemis Resources Limited. The tenements also form part of the Novo Joint Venture where Novo Resources Corp have a 50% interest in paleoplacer and conglomerate gold.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	CRA drillhole Work was entirely completed by CRA Exploration. Balmoral Project Tawanna Resources and De Beers Australia Exploration (DBAE) discovered Black top 1 and 2 where gem quality diamonds were recovered in 2006 with trial mining. As part of DBAE exploration stream sediment sampling was conducted over a large area of the West Pilbara. This data covers the Balmoral Project, but has not been publicly released. A VTEM survey was flown over the northern part of the Balmoral tenements by Fox Resources Limited in 2007. Fixed Loop Electromagnetics has been undertaken on several VTEM anomalies.
		 Fox Resources Limited also conducted rock chip sampling. All exploration to date is considered of a good quality, and other companies recommended further exploration was warranted.





Criteria	JORC Code explanation	Commentary
		 Artemis agrees that further exploration is required and that this means a better understanding of the geology and geological model which encapsulates mineralisation identified to date, which includes cobalt, zinc, lead, gold and diamonds.
Geology	Deposit type, geological setting and style of mineralisation.	 CRA drillhole The drillhole was completed to test stratigraphic concepts relating to sediment hosted gold and uranium deposits, with strong affinities to the Witwatersrand style. Balmoral Project All mineralisation models that relate to sedimentary, and intrusion related deposits are being investigated.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case 	All drill hole information is contained in the body of the release above.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually 	Not relevant to exploration being undertaken.





Criteria	JORC Code explanation	Commentary
Relationship between	 Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. These relationships are 	CRA drillhole
mineralisation widths and intercept lengths	particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	 A better understanding of the thicknesses of stratigraphic units in the Fortescue Group is required. Balmoral Project Not being reported.
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	Appropriate maps and sections are available in the body of this announcement.
Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	Reporting of results in this report is considered balanced.
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical 	 Interpretation of regional geophysical data is ongoing.





Criteria	JORC Code explanation	Commentary
Further work	survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. • The nature and scale of planned further work (eg tests for lateral extensions, depth extensions or large-scale stepout drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	 Artemis is planning with GSWA and CSIRO to complete significant work programmes on the diamond drill core from ASD-1. Hylogger, XRF and high quality core photos with structural logging will be completed, before the core is cut and sent for whole rock assay analysis. The results of this work and how the drill hole compares to exploration results to date will be used to further exploration.