

2 December 2021

New mineralised intrusion discovered at Julimar

New zone of shallow high-grade mineralisation intersected directly south of the ~6.5km long Hartog airborne EM anomaly, outside of the Gonneville Intrusion

Highlights

- « **New shallow high-grade PGE-Ni-Cu-Co sulphide discovery** made on Chalice-owned farmland within the 100%-owned Julimar Project, ~70km NE of Perth, WA:
 - « **High-grade** (>0.6% NiEq) sulphide mineralisation intersected in a **newly identified ultramafic intrusive unit** to the west of Gonneville (separated by ~70m of metasediments):
 - « **3m @ 2.0g/t Pd, 0.3g/t Pt, 0.6% Ni, 0.5% Cu, 0.05% Co (~1.7% NiEq¹)** from 68m (JRC392);
 - « **2m @ 1.8g/t Pd, 0.2g/t Pt, 0.6% Ni, 0.5% Cu, 0.06% Co (~1.9% NiEq)** from 139.2m (JD211);
 - « New zone has no EM response but is **located immediately south of the ~6.5km long Hartog Airborne EM (AEM) anomaly** – further upgrading the prospectivity of that target and again highlighting the **potential for further ‘blind’ discoveries**.
 - « New zone already visually identified in holes drilled **down-dip** and **along strike to the south** (assays pending).
- « Ongoing step-out drilling **outside the Gonneville Resource** has extended multiple **high-grade** (>0.6% NiEq) zones, including:
 - « **23.3m @ 2.8g/t Pd, 0.7g/t Pt, 1.0g/t Au, 0.2% Ni, 1.5% Cu, 0.02% Co (~2.7% NiEq)** from 582m (JD142);
 - « **7.1m @ 2.3g/t Pd, 0.9g/t Pt, 0.3% Ni, 0.9% Cu, 0.02% Co (~2.0% NiEq)** from 513m (JD157);
 - « **4.4m @ 4.5g/t Pd, 2.2g/t Pt, 0.6% Ni, 0.2% Cu, 0.03% Co (~3.0% NiEq)** from 523m (JD157);
 - « **8.2m @ 2.2g/t Pd, 1.1g/t Pt, 1.1g/t Au, 0.1% Ni, 0.1% Cu, 0.01% Co (~1.6% NiEq)** from 455m (JD162); and,
 - « **5.0m @ 3.3g/t Pd, 0.8g/t Pt, 0.2g/t Au, 0.3% Ni, 0.7% Cu, 0.02% Co (~2.2% NiEq)** from 157m (JD167).
- « Step-out drilling is continuing on farmland, focused on **extending the high-grade Resource**.
- « 40m spaced infill drilling within the shallow (<250m deep) Inferred part of the Gonneville Resource continues to deliver results in line with the Resource model (refer to Appendix).
- « Conservation Management Plan (CMP) for initial drilling at the Hartog-Baudin targets is finalised and under consideration by the WA State Government – **approval expected shortly**.
- « The Scoping Study for an initial mine development at Gonneville is progressing **on schedule**.

¹ Nickel Equivalent (%) = Ni (%) + 0.37xPd (g/t) + 0.24xPt (g/t) + 0.25xAu (g/t) + 0.65xCu (%) + 3.24xCo (%)

Registered Office
ABN 47 116 648 956

Level 3, 46 Colin Street
West Perth, Western Australia
PO Box 428, West Perth 6005

T: +61 8 9322 3960

info@chalicemining.com
www.chalicemining.com

 @chalicemining
 chalice-mining

Overview

Chalice Mining Limited ("Chalice" or "the Company", ASX: CHN | OTCQB: CGMLF) is pleased to report a significant new discovery at its 100%-owned **Julimar Nickel-Copper-Platinum Group Element (PGE) Project**, located ~70km north-east of Perth in Western Australia.

Step-out drilling at the north-western limit of the Gonnevillite deposit has intersected a new shallow zone of high-grade sulphide mineralisation. The mineralisation occurs within a newly identified narrow ultramafic unit located approximately 70m above the hanging wall contact between the Gonnevillite Intrusion and the surrounding meta-sediments.

This discovery is considered significant because the new zone is located immediately south of the ~6.5km long Hartog AEM anomaly (within the Julimar State Forest). In addition, it confirms that there are other mineralised intrusions in the area that have no EM response. As such, it is interpreted that the Hartog AEM anomaly may stem from the northern extension of this mineralised zone, which in turn may represent the very southern extent of an entirely new intrusion (Hartog).

Chalice's Conservation Management Plan for initial drilling at the Hartog-Baudin Targets within the Julimar State Forest (Stage 2 CMP) has been finalised and is currently under consideration by the WA State Government. Approval is expected shortly, which will allow the first ever drilling across ~10km of strike length of the Julimar Complex.

While CMP approval is awaited, Chalice has been continuing step-out and infill drilling at the Gonnevillite deposit with six rigs. A total of 225 diamond drill holes and 460 RC drill holes (including RC pre-collars with diamond tails) for ~180,000m have been completed to date at the Project.

New assay results have been received for 129 holes, which were not included in the Gonnevillite maiden Mineral Resource Estimate (Resource) of 330Mt @ 0.94g/t Pd+Pt+Au (3E), 0.16% Ni, 0.10% Cu, 0.016% Co (refer to ASX Announcement on 9 November 2021). Assay results are pending for a further 66 completed drill holes, with lab turnaround times currently averaging approximately four weeks.

New assay results have been received for drilling targeting:

- « The eastern (footwall) and western (hanging wall) contacts between the Gonnevillite Intrusion and surrounding meta-sediments;
- « Infill and down-dip extensions to the high-grade G1-G9 zones;
- « Infill of the shallow Inferred sections of the Gonnevillite Resource; and,
- « The non-magnetic pyroxenite and leucogabbro-rich north-western part of the Gonnevillite Intrusion.

Chalice Managing Director and Chief Executive Officer, Alex Dorsch, said: "Extensional drilling in an area previously considered to consist only of metasediments has intersected a tantalising new shallow zone of sulphide mineralisation, which is interpreted to be the potential southern extent of a new Hartog zone. The moderate nickel, copper and cobalt grades observed are considered particularly encouraging.

"We believe that the new ultramafic unit intersected is very unlikely to be Gonnevillite, given that it is separated by ~70m of metasediments and appears to be highly deformed and geochemically different. The new discovery has once again upgraded the prospectivity of the >6.5km long Hartog target immediately north of the new intersections.

"After lengthy consultation with the WA State Government, we believe our low-impact approach to initial drilling in the State Forest is close to being approved. We have received positive feedback on our approach to minimising disturbance and we are eagerly awaiting final approvals for drilling to commence at this exciting new frontier."

Technical overview

New mineralised ultramafic unit discovered

The new zone of sulphide mineralisation to the north-west of the Gonneville Intrusion was initially recognised in visual logging as a narrow zone of matrix to semi-massive pyrrhotite-pentlandite-chalcopyrite mineralisation, hosted within a strongly sheared ultramafic intrusion approximately 70m above the hanging wall contact of the Gonneville Intrusion (Figure 1 and Figure 3).



Figure 1. Matrix to semi-massive sulphide mineralisation in JD211.

The new zone has so far been intersected in five wide-spaced holes, based on initial visual logging. Assays have been received for two of these holes, with significant high-grade (>0.6% NiEq) results including:

- « **3m @ 2.0g/t Pd, 0.3g/t Pt, 0.6% Ni, 0.5% Cu, 0.05% Co (~2.0% NiEq)** from 68m (JRC392);
- « **2m @ 1.8g/t Pd, 0.2g/t Pt, 0.6% Ni, 0.5% Cu, 0.06% Co (~1.9% NiEq)** from 139.2m (JD211);

The ultramafic unit appears to widen towards the north where it is trending towards the ~6.5km long Hartog AEM anomaly (Figure 2).

It is currently interpreted to be a separate intrusion which overlies the Gonneville Intrusion in sequence. However, the ultramafic unit intersected to date is relatively thin and strongly sheared and therefore a definitive conclusion is not yet possible. Mineralisation is not associated with significant zones of deformation / shearing within Gonneville.

The new discovery further increases the prospectivity of the Hartog target within the Julimar State Forest immediately north. Further step-out drilling is continuing targeting the new zone on private farmland.

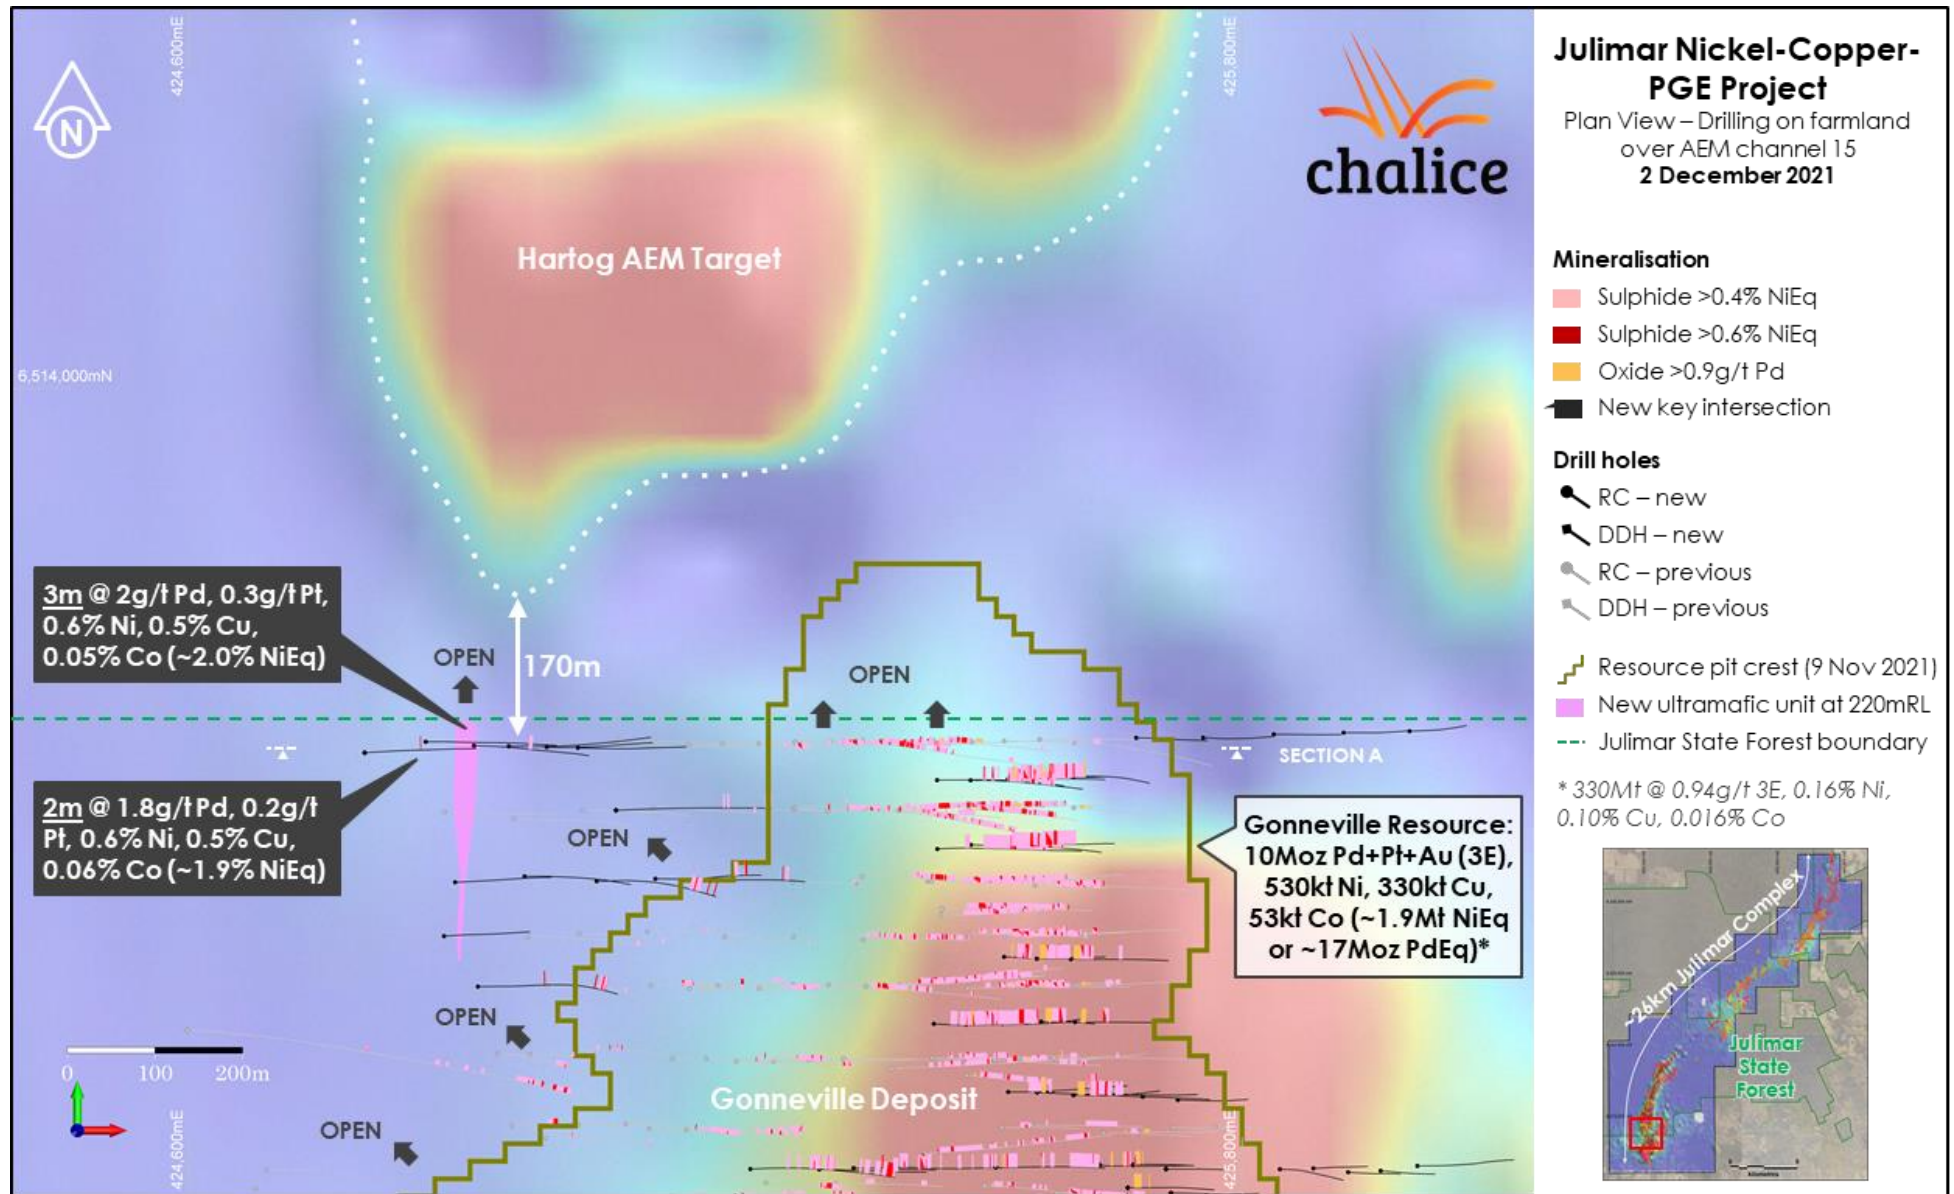


Figure 2. Gonnevillle north and Hartog south Plan View – drilling results and Resource pit crest over ch15 Airborne EM.

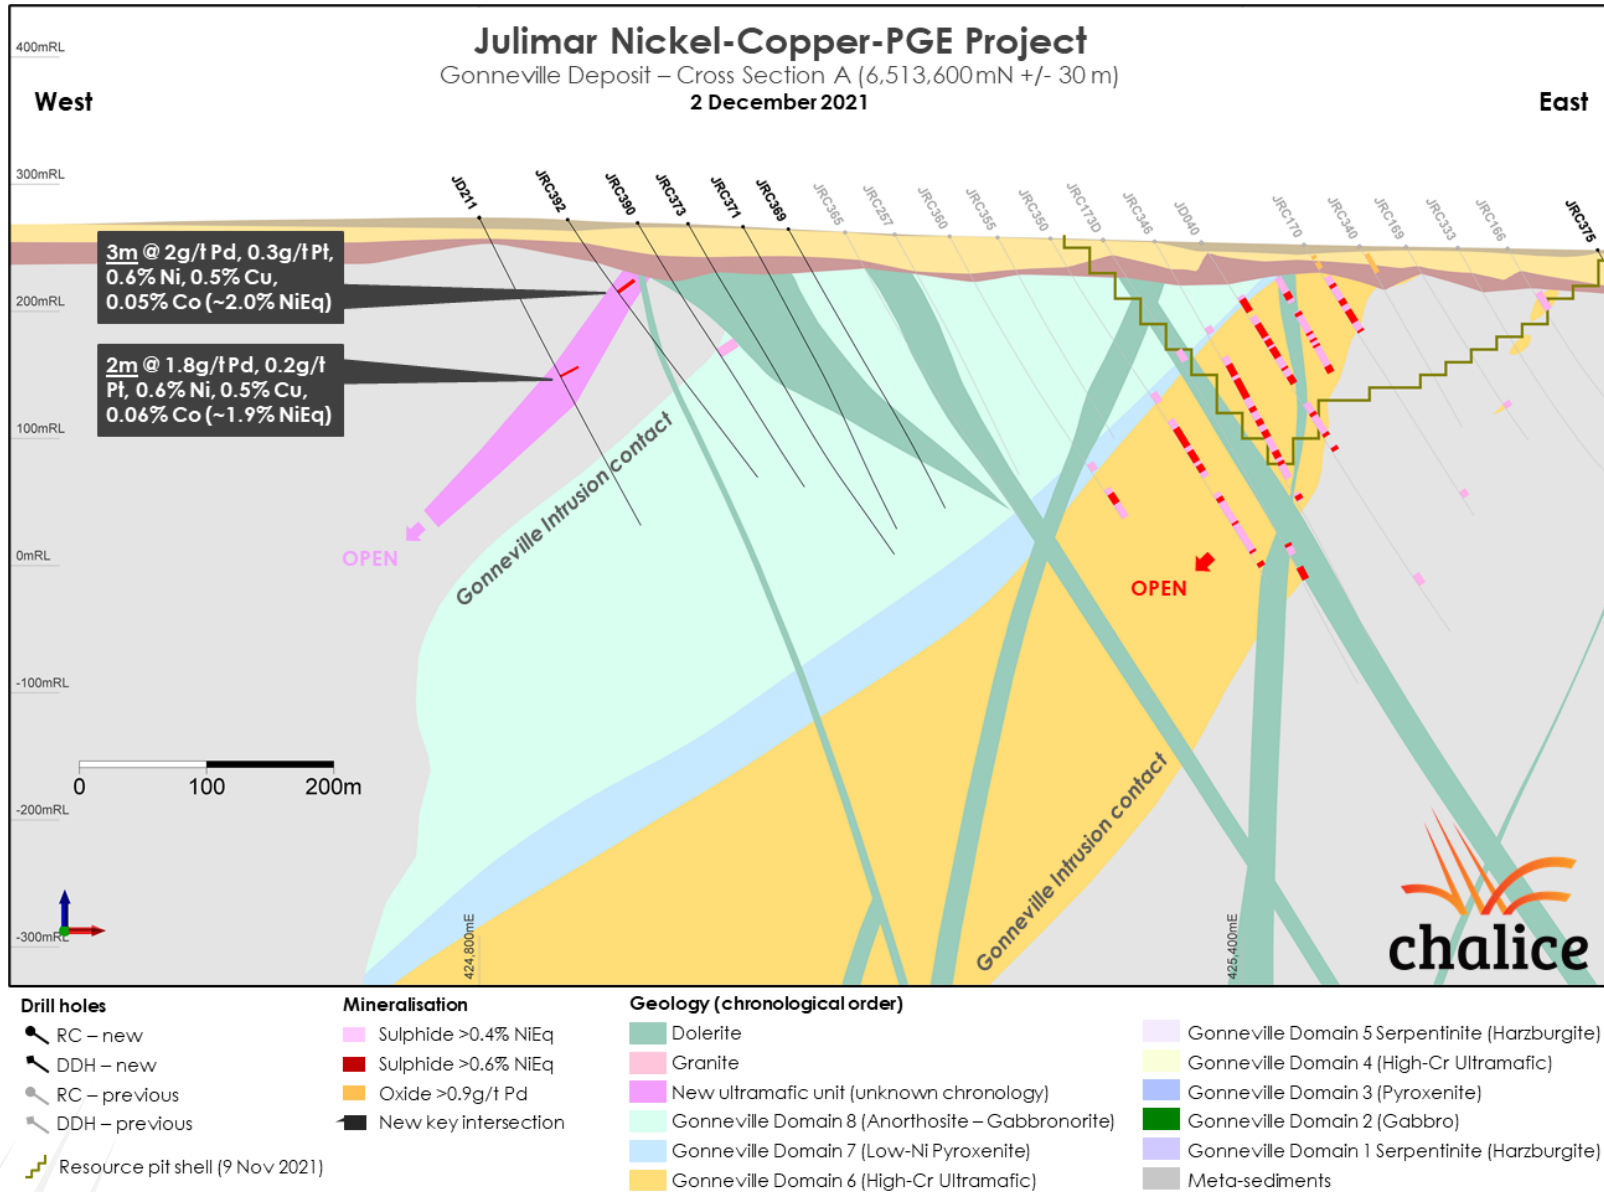


Figure 3. Gonneville cross section 6,513,600mN +/- 30m.

Gonneville step-out drilling results

Drilling outside the Gonneville Resource pit shell (9 Nov 2021) continues to intersect broad intervals of sulphide mineralisation and continues to extend the high-grade zones (Figure 4).

Significant new high-grade (>0.6% NiEq) results include:

- « **23.3m @ 2.8g/t Pd, 0.7g/t Pt, 1.0g/t Au, 0.2% Ni, 1.5% Cu, 0.02% Co (~2.7% NiEq)** from 582m (JD142);
- « **7.1m @ 2.3g/t Pd, 0.9g/t Pt, 0.3% Ni, 0.9% Cu, 0.02% Co (~2.0% NiEq)** from 513m (JD157);
- « **4.4m @ 4.5g/t Pd, 2.2g/t Pt, 0.6% Ni, 0.2% Cu, 0.03% Co (~3.0% NiEq)** from 523m (JD157);
- « **8.2m @ 2.2g/t Pd, 1.1g/t Pt, 1.1g/t Au, 0.1% Ni, 0.1% Cu, 0.01% Co (~1.6% NiEq)** from 455m (JD162);
- « **12.9m @ 1.2g/t Pd, 0.3g/t Pt, 0.3% Ni, 0.3% Cu, 0.02% Co (~1.1% NiEq)** from 355m (JD172);
- « **5.0m @ 3.3g/t Pd, 0.8g/t Pt, 0.2g/t Au, 0.3% Ni, 0.7% Cu, 0.02% Co (~2.2% NiEq)** from 157m (JD167);
- « **8m @ 2.0g/t Pd, 0.5g/t Pt, 0.3% Ni, 0.3% Cu, 0.03% Co (~1.5% NiEq)** from 223m (JRC423); and,
- « **8m @ 1.4g/t Pd, 0.4g/t Pt, 0.4g/t Au, 0.2% Ni, 0.3% Cu, 0.02% Co (~1.1% NiEq)** from 107m (JRC403).

For personal use only

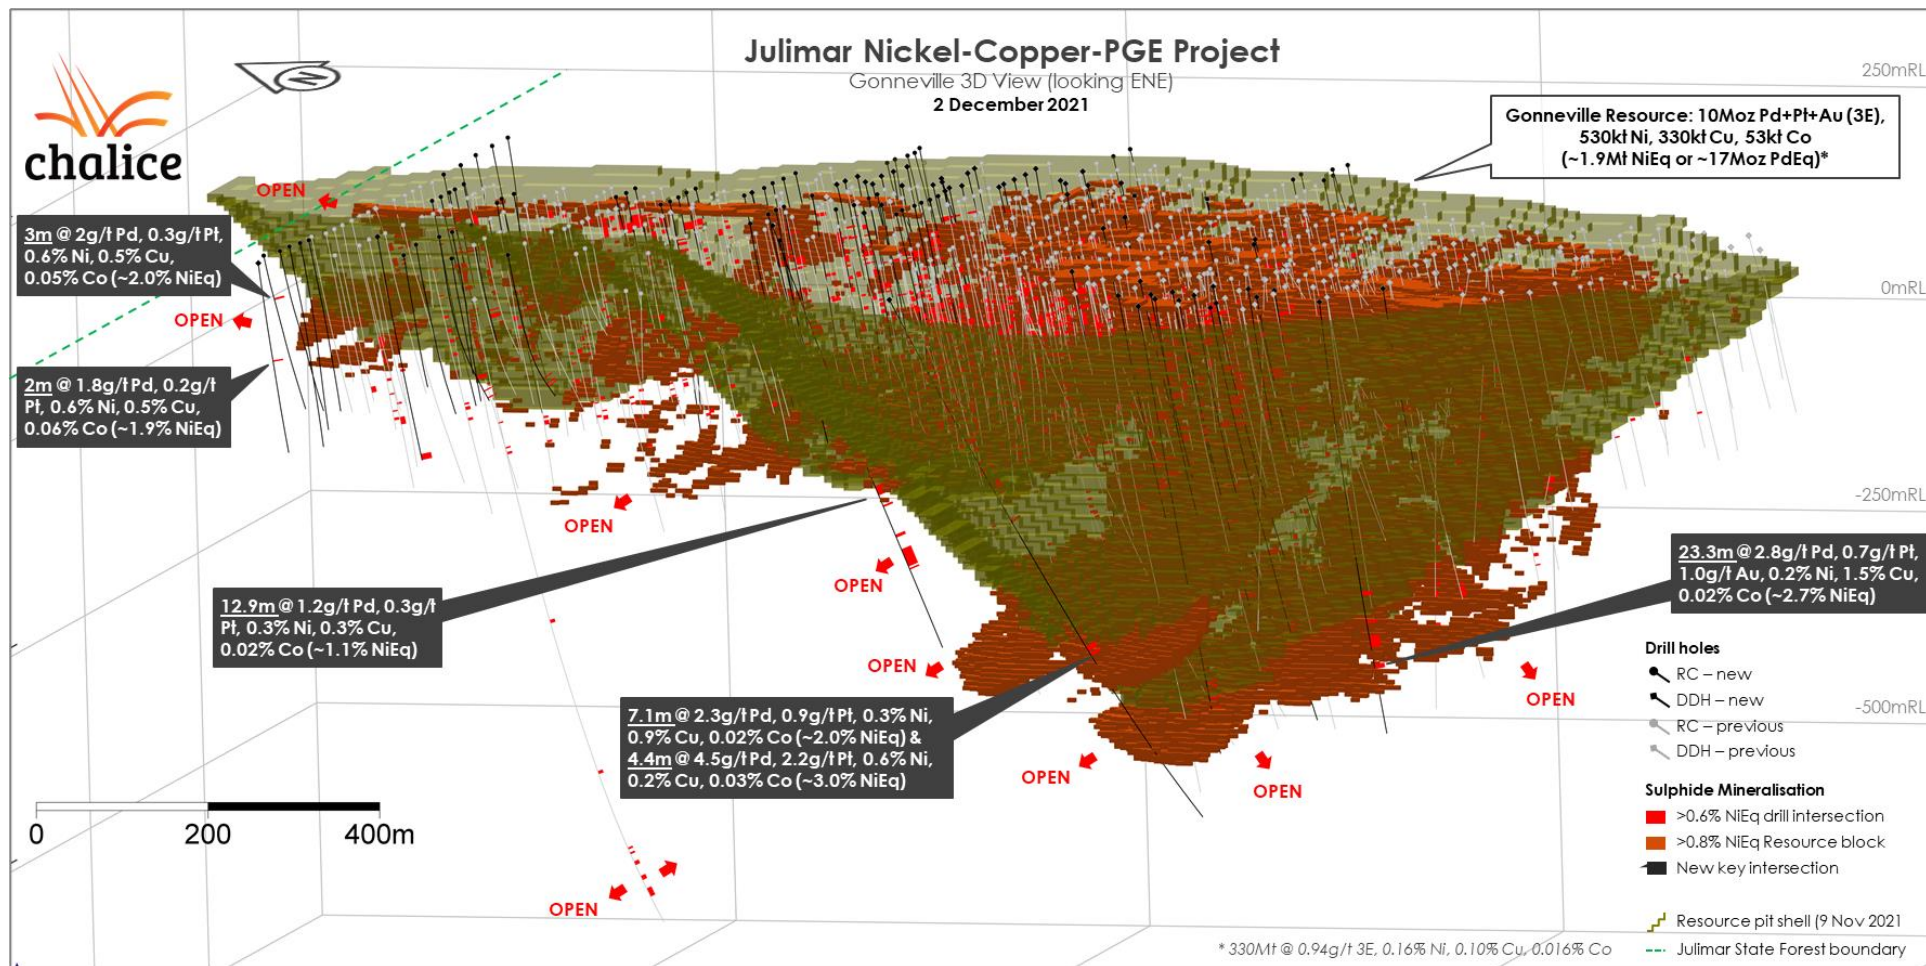


Figure 4. Gonneville 3D View (looking east-north-east) – drilling results, Resource blocks (>0.8% NiEq only) and pit shell.

Infill drilling results

Infill drilling within the Gonneville Resource pit shell (9 Nov 2021) has continued to deliver results in line with expectations. Refer to Appendix A for a full listing of results (infill and extensional).

Recent results indicate that the high-grade G2 zone continues further to the north at depth than previously interpreted. Additional drilling is required in the northern part of Gonneville, as high-grade extensions have the potential to deepen the Resource pit shell in this area.

Forward plan

Chalice's Julimar Project strategy is to concurrently advance studies for an initial mining development on private farmland and to define the full extent of mineralisation along the >26km long Julimar Complex.

Ongoing and planned activities at Julimar include:

- « **Step-out drilling (farmland)** – Step-out diamond drilling on a nominal ~80m spacing is expected to continue until ~Q1 2022, subject to results. Step-out drilling is targeting the extension of high-grade (>0.6 NiEq) zones.
- « **Infill drilling (farmland)** – The northern portion of the Gonneville Resource is currently classified as Inferred and additional infill drilling is targeting conversion of the shallow (<250m deep) portion into the higher-confidence Indicated category.
- « **Reconnaissance drilling at the Torres-Jansz and Baudin targets at the northern end of the Julimar Complex** – First-pass AC drilling on private farmland will commence in the coming weeks.
- « **Geotechnical, metallurgical, hydrogeological and infrastructure drilling (Gonneville)** – AC/RC/diamond drilling to support studies for Gonneville will commence once resource drilling is complete and will continue through Q1 2022.
- « **Metallurgical testwork (Gonneville)** – ongoing testwork is now focused on optimisation of disseminated sulphide performance and continuing leach testwork on oxide composites. Investigation into further bulk concentrate enrichment alternatives has commenced for the disseminated sulphide mineralisation as part of the recent \$2.9M grant from the Australian Government's Co-operative Research Centre Projects (CRC-P) Program. Initial waste rock and tailings characterisation testwork continues.
- « **Studies (Gonneville)** – Work is underway to support studies for the project, which will assess potential mine development scenarios for the Gonneville Deposit. The Company anticipates that a Scoping Study for the initial stage of development at Gonneville will be completed in Q2 2022.
- « **Low-impact reconnaissance drilling at the Hartog-Baudin Targets within the Julimar State Forest** – First-pass low-impact drilling utilising small track-mounted diamond rigs is planned to commence immediately upon obtaining access and permitting approvals, which is expected shortly. A total of ~70 drill sites are planned across the ~10km strike length, with the ability to drill multiple angled holes at each site. No mechanised vegetation clearance is required to complete this first pass of drilling.

Authorised for release by the Disclosure Committee of the Company.

For further information please visit www.chalicemining.com or contact:

Corporate Enquiries

Alex Dorsch
Managing Director & CEO
Chalice Mining Limited
+61 8 9322 3960
info@chalicemining.com

Media Enquiries

Nicholas Read
Principal and Managing Director
Read Corporate Investor Relations
+61 8 9388 1474
info@readcorporate.com.au

Follow our communications

LinkedIn: [chalice-mining](#)
Twitter: [@chalicemining](#)

About the Julimar Nickel-Copper-PGE Project

The 100%-owned Julimar Nickel-Copper-PGE Project is located ~70km north-east of Perth in Western Australia and is surrounded by world-class infrastructure. The Project was staked in early 2018 as part of Chalice's global search for high-potential nickel sulphide exploration opportunities.

Chalice discovered the Gonnevillite deposit in the very first drill hole at the project in March 2020, intersecting shallow high-grade PGE-nickel-copper-cobalt-gold sulphide mineralisation. Gonnevillite is located on private farmland at the southern end of the interpreted >26km long Julimar Complex.

In November 2021, Chalice defined a tier-1 scale, pit-constrained maiden Mineral Resource Estimate (Resource) for Gonnevillite – 330Mt @ 0.94g/t Pd+Pt+Au (3E), 0.16% Ni, 0.10% Cu, 0.016% Co (~0.58% NiEq or ~1.6g/t PdEq)². The maiden Resource confirmed Gonnevillite is the largest nickel sulphide discovery worldwide since 2000³, and the largest PGE discovery in Australian history – demonstrating the potential for Julimar to become a strategic, long-life 'green metals' asset.

The Resource includes a significant high-grade sulphide component, affording the project significant optionality in development and the potential to materially enhance project economics in the initial years of operations.

The Gonnevillite Resource is interpreted to cover just ~7% of the interpreted Julimar Complex strike length. As such the project is considered highly prospective for further orthomagmatic Ni-Cu-PGE discoveries.

The significant Julimar discovery has defined the new West Yilgarn Ni-Cu-PGE Province, an almost entirely unexplored mineral province which is interpreted to extend for ~1,200km along the western margin of the Yilgarn Craton. Chalice holds an unrivalled >8,000km² land position in this exciting new area and is leveraging its competitive 'first mover' advantage.

² Refer to full Mineral Resource Statement in Appendix B

³ Source: S&P Global Market Intelligence, Capital IQ

For personal use only

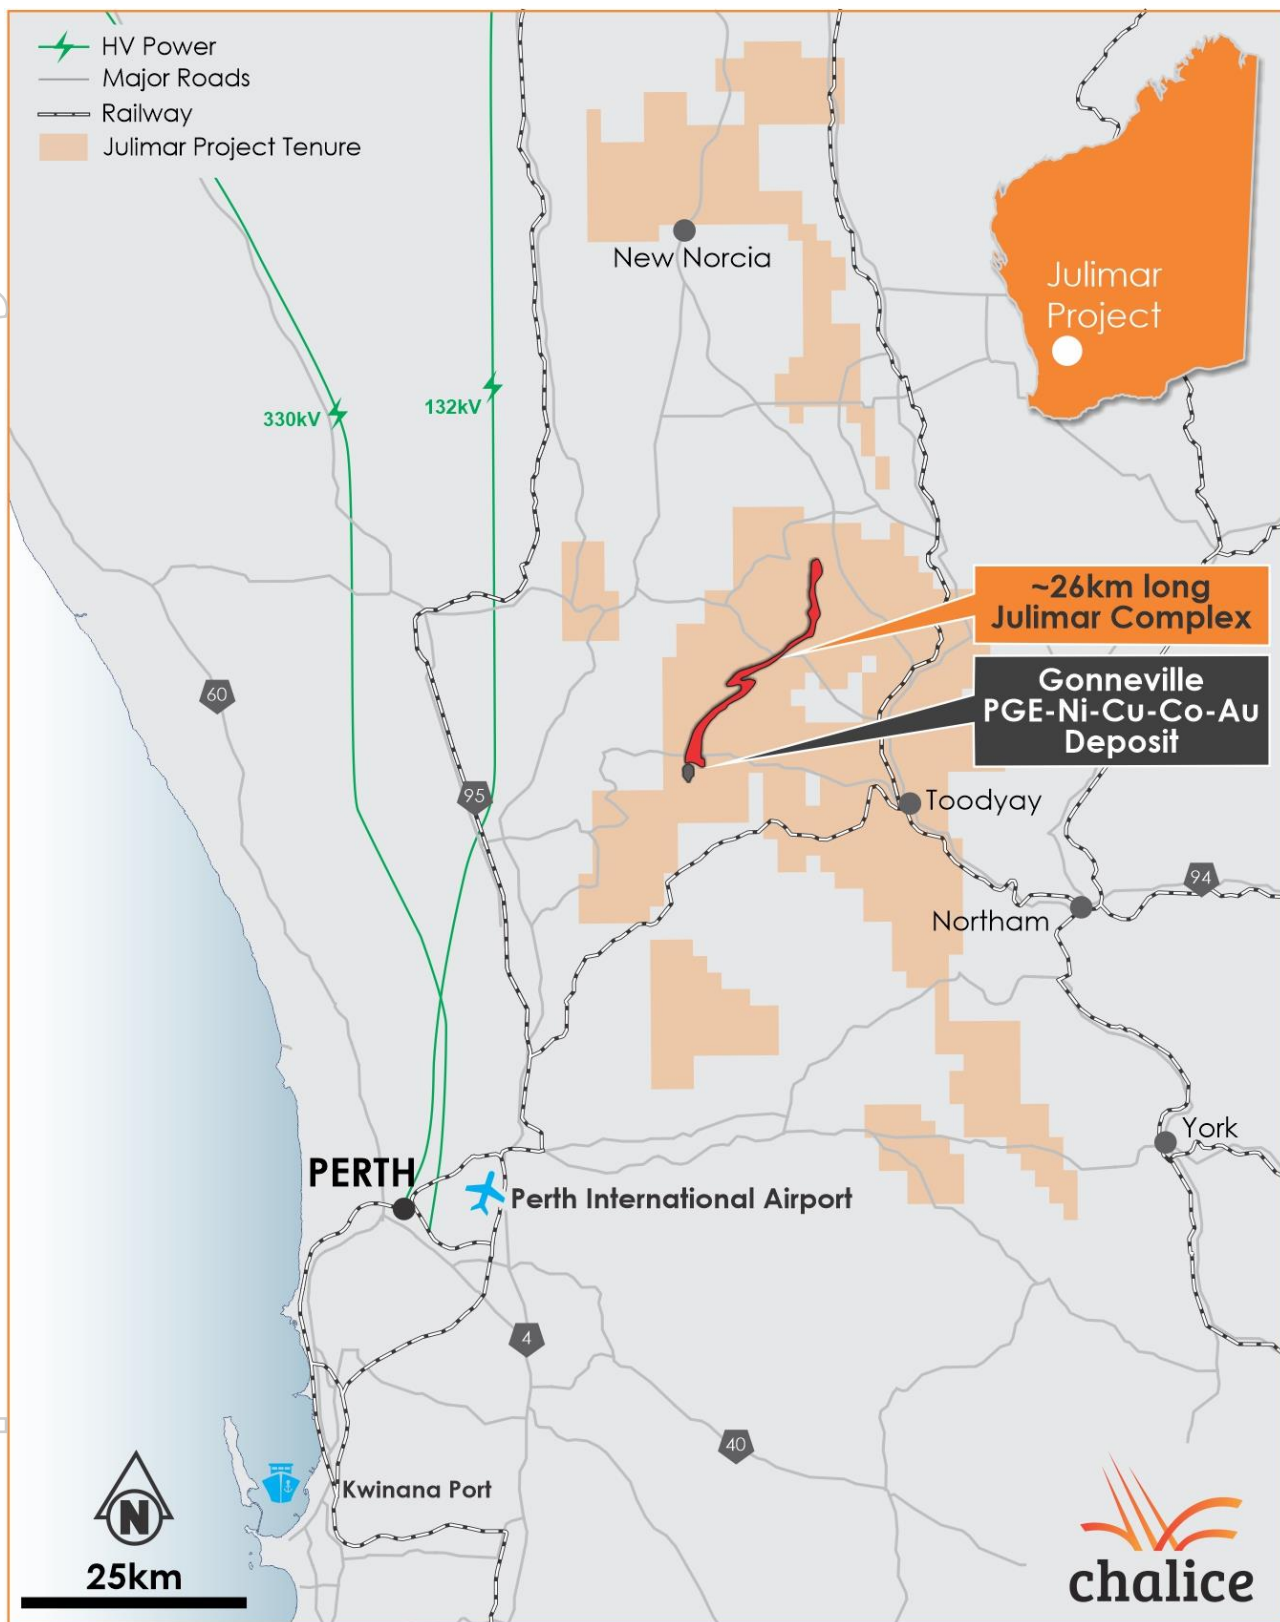


Figure 5. Julimar Complex, Gonneville deposit, Project tenure and nearby infrastructure.

Competent Persons and Qualifying Persons Statement

The information in this announcement that relates to Exploration Results in relation to the Julimar Nickel-Copper-PGE Project is based on and fairly represents information and supporting documentation compiled by Mr. Bruce Kendall BSc (Hons), a Competent Person, who is a Member of the Australian Institute of Geoscientists. Mr. Kendall is a full-time employee of the Company as General Manager – Development and has sufficient experience that is relevant to the activity being undertaken to qualify as a Competent Person as defined in the 2012 edition of the Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves, and is a Qualified Person under National Instrument 43-101 – ‘Standards of Disclosure for Mineral Projects’. The Qualified Person has verified the data disclosed in this release, including sampling, analytical and test data underlying the information contained in this release. Mr Kendall consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears.

The Information in this announcement that relates to Mineral Resources has been extracted from the ASX announcement titled “Tier 1 Scale Maiden Mineral Resource at Julimar” dated 9 November 2021. This announcement is available to view on the Company’s website at www.chalicemining.com.

The Company confirms that it is not aware of any new information or data that materially affects the information included in the original announcement and that all material assumptions and technical parameters underpinning the estimates in the original release continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person and Qualified Person’s findings are presented have not been materially modified from the relevant original market announcement. Refer to Annexure B for further information on the Mineral Resource Estimate.

Forward Looking Statements

This announcement may contain forward-looking information, including forward looking information within the meaning of Canadian securities legislation and forward-looking statements within the meaning of the United States Private Securities Litigation Reform Act of 1995 (collectively, forward-looking statements). These forward-looking statements are made as of the date of this report and Chalice Mining Limited (the Company) does not intend, and does not assume any obligation, to update these forward-looking statements.

Forward-looking statements relate to future events or future performance and reflect Company management’s expectations or beliefs regarding future events and include, but are not limited to: the impact of the discovery on the Julimar Project’s capital payback; the Company’s strategy; the estimated timing of drilling in the Julimar State Forest; the Company’s intended activities at the Julimar Project; and the success of future mining operations.

In certain cases, forward-looking statements can be identified by the use of words such as, “anticipates”, “considered”, “expected”, “highly”, “interpreted”, “likely”, “may”, “plan” or “planned”, “potential”, “prospectivity”, “will” or variations of such words and phrases or statements that certain actions, events or results may, could, would, might or will be taken, occur or be achieved or the negative of these terms or comparable terminology. By their very nature forward-looking statements involve known and unknown risks, uncertainties and other factors which may cause the actual results, performance or achievements of the Company to be materially different from any future results, performance or achievements expressed or implied by the forward-looking statements.

Such factors may include, among others, risks related to actual results of current or planned exploration activities; whether geophysical and geochemical anomalies are related to economic mineralisation or some other feature; obtaining appropriate access to undertake additional ground disturbing exploration work on EM anomalies located in the Julimar State Forrest; the results from testing EM anomalies; results of planned metallurgical test work including results from other zones not tested yet, scaling up to commercial operations; changes in project parameters as plans continue

to be refined; changes in exploration programs and budgets based upon the results of exploration, changes in commodity prices; economic conditions; grade or recovery rates; political and social risks, accidents, labour disputes and other risks of the mining industry; delays or difficulty in obtaining governmental approvals, necessary licences, permits or financing to undertake future mining development activities; changes to the regulatory framework within which Chalice operates or may in the future; movements in the share price of investments and the timing and proceeds realised on future disposals of investments, the impact of the COVID 19 pandemic as well as those factors detailed from time to time in the Company's interim and annual financial statements, all of which are filed and available for review on SEDAR at sedar.com, ASX at asx.com.au and OTC Markets at otcm Markets.com.

Although the Company has attempted to identify important factors that could cause actual actions, events or results to differ materially from those described in forward-looking statements, there may be other factors that cause actions, events or results not to be as anticipated, estimated or intended. There can be no assurance that forward-looking statements will prove to be accurate, as actual results and future events could differ materially from those anticipated in such statements. Accordingly, readers should not place undue reliance on forward-looking statements.

Appendix A Drilling and assay data

Table 1. Significant new drill intersections (Oxide: >0.3g/t Pd, >1g/t Pd. Sulphide: >0.4% NiEq, >0.6% NiEq).

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
JD133	33.0	61.0	28.0	0.80	0.14	0.01	0.15	0.10	0.01	Sulphide	Infill
Incl	41.0	43.6	2.6	1.86	0.14	0.02	0.21	0.33	0.02	Sulphide	Infill
and	45.7	51.0	5.3	0.85	0.18	0.01	0.17	0.06	0.02	Sulphide	Infill
and	55.0	61.0	6.0	1.11	0.21	0.01	0.16	0.07	0.02	Sulphide	Infill
JD133	72.0	132.0	60.0	0.66	0.14	<0.01	0.17	0.07	0.02	Sulphide	Infill
Incl	74.5	77.3	2.8	1.04	0.18	0.01	0.19	0.07	0.02	Sulphide	Infill
and	98.0	101.0	3.0	0.77	0.17	0.01	0.20	0.08	0.02	Sulphide	Infill
and	106.0	110.8	4.8	0.75	0.15	<0.01	0.18	0.17	0.02	Sulphide	Infill
and	114.0	116.0	2.0	0.80	0.16	<0.01	0.20	0.07	0.02	Sulphide	Infill
and	120.0	132.0	12.0	0.82	0.18	<0.01	0.19	0.06	0.02	Sulphide	Infill
JD133	172.4	177.0	4.6	0.43	0.08	<0.01	0.18	0.01	0.02	Sulphide	Infill
JD133	199.9	211.0	11.1	0.61	0.11	<0.01	0.14	0.04	0.01	Sulphide	Infill
JD133	218.0	233.0	15.0	0.56	0.14	<0.01	0.11	0.06	0.01	Sulphide	Infill
JD133	242.0	250.5	8.5	0.48	0.11	<0.01	0.17	0.04	0.01	Sulphide	Infill
JD133	320.4	322.5	2.1	0.77	0.21	0.01	0.21	0.08	0.02	Sulphide	Infill
JD133	343.0	348.8	5.8	0.65	0.14	0.04	0.14	0.11	0.01	Sulphide	Infill
JD133	353.0	362.0	9.0	1.79	0.26	0.01	0.18	0.05	0.02	Sulphide	Infill
Incl	353.0	355.8	2.7	4.83	0.65	0.02	0.26	0.12	0.03	Sulphide	Infill
JD134	32.8	49.0	16.3	0.54	0.10	0.01	0.14	0.06	0.01	Sulphide	Infill
Incl	37.0	39.0	2.0	0.74	0.15	0.01	0.24	0.10	0.02	Sulphide	Infill
JD134	61.0	66.0	5.0	0.64	0.13	0.01	0.16	0.03	0.02	Sulphide	Infill
JD134	77.0	120.0	43.0	0.59	0.13	0.01	0.18	0.06	0.02	Sulphide	Infill
Incl	78.9	82.0	3.1	0.81	0.17	0.01	0.15	0.13	0.02	Sulphide	Infill
and	115.4	120.0	4.7	1.52	0.36	0.02	0.31	0.26	0.02	Sulphide	Infill
JD134	126.0	148.0	22.0	0.52	0.11	<0.01	0.13	0.06	0.01	Sulphide	Infill
Incl	126.0	128.0	2.0	0.96	0.19	<0.01	0.17	0.08	0.02	Sulphide	Infill
JD134	228.1	250.2	22.1	0.57	0.12	0.01	0.15	0.07	0.02	Sulphide	Infill
JD134	276.0	281.6	5.6	0.39	0.09	<0.01	0.15	0.08	0.02	Sulphide	Infill
JD134	331.0	333.7	2.7	1.44	0.23	0.01	0.22	0.30	0.02	Sulphide	Infill
JD134	348.0	354.0	6.0	0.55	0.10	0.01	0.16	0.02	0.01	Sulphide	Infill
JD134	381.0	385.0	4.0	0.70	0.10	0.01	0.15	<0.01	0.01	Sulphide	Infill
JD134	389.7	411.6	21.9	0.50	0.11	0.01	0.17	0.06	0.01	Sulphide	Infill
Incl	389.7	394.0	4.3	0.58	0.15	0.03	0.17	0.25	0.02	Sulphide	Infill
JD134	418.0	427.0	9.0	0.88	0.13	0.01	0.23	0.08	0.02	Sulphide	Infill
JD134	433.0	446.0	13.0	1.39	0.19	0.02	0.31	0.58	0.03	Sulphide	Infill
Incl	440.0	445.2	5.2	2.70	0.30	0.04	0.53	1.36	0.05	Sulphide	Infill
JD135	16.5	37.0	20.5	0.96	0.21	0.01	0.18	0.08	0.02	Oxide	Infill
Incl	25.0	34.0	9.0	1.23	0.28	0.01	0.17	0.10	0.02	Oxide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
JD135	61.0	87.0	26.0	0.60	0.12	0.01	0.16	0.04	0.02	Sulphide	Infill
JD136	44.0	127.7	83.7	0.62	0.15	0.03	0.17	0.08	0.02	Sulphide	Infill
Incl	49.0	56.0	7.0	1.03	0.34	0.02	0.24	0.06	0.03	Sulphide	Infill
and	63.0	65.0	2.0	0.51	0.12	0.04	0.15	0.40	0.02	Sulphide	Infill
and	73.0	79.0	6.0	0.65	0.14	0.02	0.19	0.12	0.02	Sulphide	Infill
and	87.0	89.0	2.0	1.39	0.51	0.03	0.20	0.05	0.02	Sulphide	Infill
and	107.0	110.0	3.0	1.00	0.21	0.04	0.19	0.11	0.02	Sulphide	Infill
JD137	54.6	60.0	5.4	1.06	0.34	0.02	0.16	0.25	0.01	Sulphide	Infill
JD137	79.5	96.5	17.0	0.59	0.12	0.01	0.14	0.09	0.01	Sulphide	Infill
Incl	90.0	96.5	6.5	1.00	0.19	0.01	0.17	0.07	0.02	Sulphide	Infill
JD137	124.0	189.0	65.0	0.75	0.14	<0.01	0.19	0.11	0.02	Sulphide	Infill
Incl	136.0	149.0	13.0	0.77	0.15	<0.01	0.17	0.08	0.02	Sulphide	Infill
and	153.0	163.8	10.8	1.21	0.23	0.01	0.33	0.28	0.02	Sulphide	Infill
and	171.0	182.0	11.0	0.78	0.15	<0.01	0.18	0.12	0.02	Sulphide	Infill
JD137	251.0	257.0	6.0	0.58	0.11	<0.01	0.14	0.05	0.02	Sulphide	Infill
JD137	278.0	282.0	4.0	0.57	0.12	0.01	0.17	0.05	0.02	Sulphide	Infill
JD137	373.6	381.0	7.4	3.19	0.60	0.04	0.27	0.17	0.02	Sulphide	Infill
JD137	390.0	403.0	13.0	0.47	0.10	0.01	0.17	0.01	0.02	Sulphide	Infill
JD137	405.9	418.0	12.1	0.50	0.11	0.01	0.21	0.06	0.02	Sulphide	Infill
JD137	430.0	451.0	21.0	0.54	0.10	0.01	0.15	0.06	0.01	Sulphide	Infill
JD137	458.2	516.0	57.8	0.91	0.17	0.16	0.15	0.28	0.01	Sulphide	Infill
Incl	458.2	460.4	2.2	1.29	0.16	0.06	0.19	0.19	0.02	Sulphide	Infill
and	490.0	492.0	2.0	2.60	0.40	0.18	0.11	0.09	0.01	Sulphide	Infill
and	495.3	498.0	2.8	1.58	0.30	0.28	0.13	1.71	0.02	Sulphide	Infill
and	501.0	511.6	10.7	2.06	0.32	0.62	0.18	0.79	0.01	Sulphide	Infill
JD137	526.0	552.8	26.8	2.00	0.55	0.33	0.18	0.91	0.02	Sulphide	Infill
Incl	526.0	533.5	7.5	3.05	1.27	0.61	0.23	2.25	0.02	Sulphide	Infill
and	538.0	552.8	14.8	1.91	0.34	0.28	0.17	0.48	0.02	Sulphide	Infill
JD138	5.0	29.4	24.4	1.11	0.31	0.01	0.10	0.09	0.03	Oxide	Infill
Incl	7.1	22.8	15.7	1.48	0.43	0.01	0.11	0.11	0.05	Oxide	Infill
JD138	35.7	47.0	11.3	0.63	0.12	0.01	0.15	0.08	0.01	Sulphide	Infill
Incl	35.7	38.0	2.3	1.05	0.18	0.02	0.15	0.07	0.01	Sulphide	Infill
JD138	60.9	185.0	124.2	0.74	0.18	0.04	0.16	0.13	0.02	Sulphide	Infill
Incl	72.0	75.0	3.0	0.80	0.33	0.01	0.13	0.07	0.01	Sulphide	Infill
and	85.0	90.0	5.0	0.97	0.29	0.02	0.17	0.15	0.02	Sulphide	Infill
and	97.0	100.0	3.0	0.96	0.49	0.16	0.19	0.31	0.02	Sulphide	Infill
and	143.0	176.0	33.0	0.92	0.20	0.06	0.18	0.17	0.02	Sulphide	Infill
and	182.0	184.0	2.0	1.43	0.27	0.07	0.20	0.11	0.02	Sulphide	Ext
JD138	197.0	199.0	2.0	0.06	<0.01	2.29	0.01	0.19	0.01	Sulphide	Ext
JD139	19.0	40.0	21.0	0.91	0.20	0.01	0.21	0.09	0.03	Oxide	Infill
Incl	19.0	23.1	4.1	1.15	0.29	0.01	0.28	0.12	0.09	Oxide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
and	29.9	37.2	7.3	1.25	0.29	0.02	0.19	0.11	0.02	Oxide	Infill
JD139	40.0	60.0	20.0	0.49	0.10	0.01	0.16	0.05	0.01	Sulphide	Infill
Incl	40.0	43.1	3.1	1.08	0.20	0.01	0.23	0.05	0.02	Sulphide	Infill
JD139	69.0	78.0	9.0	0.41	0.07	0.01	0.15	0.05	0.02	Sulphide	Infill
JD139	85.0	96.0	11.0	0.56	0.16	0.02	0.16	0.07	0.02	Sulphide	Infill
JD139	101.0	125.0	24.0	0.66	0.12	0.02	0.15	0.06	0.01	Sulphide	Infill
Incl	120.0	123.0	3.0	0.90	0.16	0.02	0.18	0.07	0.02	Sulphide	Infill
JD139	132.0	139.0	7.0	0.44	0.11	0.01	0.14	0.05	0.01	Sulphide	Infill
JD139	144.3	184.0	39.7	0.71	0.14	0.03	0.16	0.08	0.02	Sulphide	Infill
Incl	149.0	151.0	2.0	0.79	0.13	0.03	0.19	0.15	0.02	Sulphide	Infill
and	162.6	169.0	6.5	1.17	0.24	0.02	0.18	0.08	0.02	Sulphide	Infill
and	175.0	182.0	7.0	0.86	0.20	0.02	0.16	0.09	0.02	Sulphide	Ext
JD140	7.0	25.5	18.5	0.77	0.05	<0.01	0.04	0.04	0.01	Oxide	Infill
Incl	14.2	20.5	6.4	1.05	0.06	0.01	0.04	0.06	0.01	Oxide	Infill
JD141	34.1	56.0	21.9	0.55	0.11	0.04	0.16	0.10	0.02	Sulphide	Infill
Incl	35.0	44.0	9.0	0.75	0.14	0.08	0.18	0.17	0.02	Sulphide	Infill
JD141	68.0	97.0	29.0	0.45	0.09	<0.01	0.17	0.04	0.02	Sulphide	Infill
Incl	84.0	86.0	2.0	0.91	0.18	<0.01	0.22	0.03	0.02	Sulphide	Infill
JD141	103.0	122.0	19.0	0.62	0.11	<0.01	0.15	0.06	0.02	Sulphide	Infill
Incl	104.0	110.0	6.0	0.92	0.16	0.01	0.16	0.07	0.02	Sulphide	Infill
JD141	127.0	169.0	42.0	0.66	0.15	0.01	0.18	0.08	0.02	Sulphide	Infill
Incl	152.1	158.0	5.9	0.79	0.15	0.02	0.19	0.08	0.02	Sulphide	Infill
JD141	174.0	195.0	21.0	0.73	0.15	0.04	0.19	0.14	0.02	Sulphide	Infill
Incl	190.0	194.0	4.0	1.72	0.31	0.12	0.39	0.26	0.04	Sulphide	Infill
JD141	201.0	216.0	15.0	0.74	0.18	0.02	0.20	0.18	0.03	Sulphide	Infill
Incl	206.0	211.0	5.0	1.66	0.42	0.03	0.36	0.26	0.05	Sulphide	Infill
JD141	226.0	235.0	9.0	0.98	0.28	0.01	0.16	0.07	0.02	Sulphide	Infill
Incl	230.0	233.0	3.0	2.13	0.65	0.03	0.32	0.18	0.03	Sulphide	Infill
JD141	241.0	271.0	30.0	0.86	0.19	0.01	0.18	0.06	0.02	Sulphide	Infill
Incl	242.0	253.0	11.0	1.26	0.28	0.01	0.18	0.08	0.02	Sulphide	Infill
JD141	283.0	295.0	12.0	1.04	0.26	0.01	0.26	0.13	0.02	Sulphide	Infill
Incl	283.0	287.0	4.0	2.11	0.58	0.02	0.46	0.35	0.03	Sulphide	Infill
JD141	324.0	361.0	37.0	0.67	0.13	0.01	0.18	0.05	0.02	Sulphide	Infill
Incl	325.0	330.0	5.0	0.75	0.15	0.01	0.20	0.06	0.02	Sulphide	Infill
and	331.0	333.0	2.0	0.80	0.15	0.01	0.20	0.03	0.02	Sulphide	Infill
and	339.0	347.0	8.0	0.88	0.16	0.01	0.21	0.08	0.02	Sulphide	Infill
JD142	63.2	78.8	15.6	0.44	0.09	0.01	0.13	0.11	0.02	Sulphide	Infill
JD142	142.0	226.0	84.0	0.62	0.12	0.01	0.17	0.07	0.02	Sulphide	Infill
Incl	149.0	161.0	12.0	1.19	0.27	0.01	0.23	0.18	0.02	Sulphide	Infill
and	214.0	218.0	4.0	0.75	0.06	0.01	0.20	0.11	0.02	Sulphide	Infill
JD142	230.5	243.0	12.5	0.83	0.16	<0.01	0.17	0.08	0.02	Sulphide	Infill

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
Incl	234.0	242.0	8.0	0.88	0.17	0.01	0.17	0.12	0.02	Sulphide	Infill
JD142	321.3	346.5	25.2	0.65	0.13	0.02	0.13	0.04	0.02	Sulphide	Infill
Incl	322.0	324.0	2.0	0.98	0.19	0.01	0.13	0.04	0.02	Sulphide	Infill
JD142	418.1	480.7	62.6	0.62	0.13	0.02	0.17	0.05	0.02	Sulphide	Infill
Incl	438.0	440.0	2.0	1.28	0.32	0.01	0.17	0.05	0.02	Sulphide	Infill
and	444.0	449.0	5.0	0.75	0.16	0.03	0.19	0.08	0.02	Sulphide	Infill
and	465.0	468.0	3.0	0.80	0.16	0.09	0.18	0.04	0.02	Sulphide	Infill
JD142	515.1	531.8	16.6	0.40	0.10	0.01	0.16	0.04	0.01	Sulphide	Ext
JD142	533.0	564.0	31.0	0.49	0.18	0.03	0.17	0.07	0.01	Sulphide	Ext
Incl	537.0	539.0	2.0	0.73	0.44	0.05	0.22	0.33	0.02	Sulphide	Ext
and	543.0	546.0	3.0	0.63	0.56	0.03	0.17	0.07	0.01	Sulphide	Ext
and	560.0	562.0	2.0	0.85	0.15	0.04	0.26	0.12	0.02	Sulphide	Ext
JD142	569.3	605.3	36.0	2.06	0.50	0.68	0.20	0.98	0.02	Sulphide	Ext
Incl	574.0	576.0	2.0	2.18	0.10	0.44	0.17	0.12	0.01	Sulphide	Ext
and	582.0	605.3	23.3	2.81	0.71	0.97	0.23	1.46	0.02	Sulphide	Ext
JD143	66.3	77.0	10.7	0.72	0.17	0.01	0.16	0.08	0.02	Sulphide	Infill
Incl	66.3	70.0	3.7	0.91	0.23	0.01	0.19	0.11	0.02	Sulphide	Infill
JD143	83.0	104.0	21.0	0.80	0.17	0.01	0.17	0.04	0.02	Sulphide	Infill
Incl	83.0	88.0	5.0	0.79	0.14	0.01	0.18	0.10	0.02	Sulphide	Infill
and	91.4	102.0	10.6	0.94	0.21	0.01	0.18	0.02	0.01	Sulphide	Infill
JD143	136.0	220.0	84.0	0.72	0.14	0.05	0.14	0.11	0.02	Sulphide	Infill
Incl	149.0	152.0	3.0	1.66	0.31	0.06	0.28	0.22	0.03	Sulphide	Infill
and	160.0	166.0	6.0	1.42	0.20	0.15	0.21	0.23	0.02	Sulphide	Infill
and	169.0	172.0	3.0	0.99	0.12	0.32	0.14	0.26	0.01	Sulphide	Infill
and	181.0	189.0	8.0	0.88	0.16	0.04	0.16	0.12	0.02	Sulphide	Infill
and	193.0	196.0	3.0	0.91	0.36	0.01	0.12	0.05	0.01	Sulphide	Infill
JD144	15.0	24.8	9.8	0.97	0.24	0.02	0.16	0.06	0.01	Oxide	Infill
Incl	16.1	23.0	6.9	1.14	0.25	0.02	0.19	0.07	0.01	Oxide	Infill
JD144	42.0	51.0	9.0	0.53	0.09	<0.01	0.16	0.04	0.02	Oxide	Infill
JD144	60.0	121.0	61.0	0.56	0.13	0.02	0.15	0.06	0.02	Sulphide	Infill
Incl	96.0	99.0	3.0	0.99	0.33	0.06	0.20	0.08	0.02	Sulphide	Infill
and	105.0	108.0	3.0	0.87	0.27	0.03	0.19	0.18	0.02	Sulphide	Infill
JD145	55.0	60.0	5.0	0.56	0.11	0.02	0.16	0.09	0.02	Sulphide	Infill
JD145	67.0	77.0	10.0	0.58	0.17	0.01	0.15	0.06	0.02	Sulphide	Infill
Incl	73.0	75.0	2.0	1.02	0.41	0.03	0.18	0.19	0.02	Sulphide	Infill
JD145	91.0	158.0	67.0	0.63	0.13	0.01	0.16	0.05	0.01	Sulphide	Infill
Incl	102.0	105.0	3.0	1.11	0.26	0.05	0.21	0.15	0.02	Sulphide	Infill
and	111.0	119.0	8.0	1.42	0.27	0.02	0.20	0.10	0.02	Sulphide	Infill
and	135.0	137.0	2.0	1.12	0.24	0.01	0.15	0.02	0.02	Sulphide	Infill
JD145	238.4	263.0	24.7	0.77	0.16	0.01	0.16	0.07	0.02	Sulphide	Infill
Incl	238.4	241.0	2.7	0.95	0.18	0.01	0.17	0.04	0.02	Sulphide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
and	248.0	254.1	6.1	1.15	0.24	0.01	0.21	0.10	0.02	Sulphide	Infill
JD145	269.0	305.2	36.2	0.78	0.16	0.01	0.12	0.08	0.01	Sulphide	Infill
Incl	273.0	277.7	4.7	0.85	0.15	0.01	0.16	0.11	0.02	Sulphide	Infill
and	281.0	289.0	8.0	0.96	0.20	0.01	0.12	0.08	0.01	Sulphide	Infill
and	293.0	297.0	4.0	0.95	0.18	0.01	0.14	0.14	0.02	Sulphide	Infill
JD145	341.0	351.9	10.9	1.79	0.25	0.03	0.41	0.21	0.03	Sulphide	Infill
Incl	342.0	344.0	2.0	1.00	0.21	0.01	0.24	0.15	0.02	Sulphide	Infill
and	347.0	351.9	4.9	3.20	0.41	0.05	0.70	0.40	0.05	Sulphide	Infill
JD145	358.0	377.0	19.0	1.35	0.38	0.03	0.28	0.11	0.02	Sulphide	Infill
Incl	362.0	370.9	8.9	2.16	0.67	0.05	0.43	0.20	0.03	Sulphide	Infill
JD145	400.0	414.0	14.0	0.49	0.10	0.01	0.15	0.05	0.01	Sulphide	Infill
JD145	422.0	447.8	25.8	0.46	0.10	0.02	0.18	0.06	0.02	Sulphide	Infill
JD146	25.0	43.0	18.0	0.68	0.16	0.01	0.21	0.05	0.03	Oxide	Infill
Incl	25.0	30.0	5.0	1.09	0.28	0.01	0.25	0.05	0.04	Oxide	Infill
JD146	49.0	57.6	8.6	1.36	0.27	0.01	0.24	0.07	0.02	Oxide	Infill
Incl	53.0	57.0	4.0	2.36	0.45	0.02	0.28	0.13	0.03	Oxide	Infill
JD146	57.6	70.0	12.4	0.70	0.14	0.01	0.16	0.04	0.02	Sulphide	Infill
Incl	63.0	66.0	3.0	0.93	0.18	0.01	0.17	0.10	0.02	Sulphide	Infill
JD146	78.0	83.0	5.0	1.08	0.16	0.02	0.20	0.06	0.02	Sulphide	Infill
Incl	79.0	81.8	2.8	1.46	0.20	0.02	0.25	0.06	0.02	Sulphide	Infill
JD147	13.3	49.8	36.5	1.10	0.25	0.02	0.24	0.06	0.04	Oxide	Infill
Incl	13.3	29.4	16.1	1.21	0.28	0.02	0.27	0.09	0.06	Oxide	Infill
and	44.8	47.0	2.2	4.91	1.13	0.08	0.68	0.09	0.07	Oxide	Infill
JD150	0.6	5.7	5.1	0.72	0.05	<0.01	0.02	0.04	<0.01	Oxide	Infill
JD150	20.0	37.0	17.0	1.14	0.23	0.07	0.15	0.10	0.01	Oxide	Infill
Incl	21.0	27.8	6.8	1.38	0.31	0.08	0.18	0.15	0.02	Oxide	Infill
and	32.0	37.0	5.0	1.29	0.25	0.08	0.16	0.06	0.02	Oxide	Infill
JD150	37.0	59.0	22.0	0.72	0.13	0.01	0.17	0.06	0.02	Sulphide	Infill
Incl	37.0	42.0	5.0	1.43	0.26	0.03	0.22	0.04	0.02	Sulphide	Infill
JD150	70.0	135.0	65.0	0.55	0.12	0.01	0.15	0.06	0.01	Sulphide	Infill
Incl	106.6	109.0	2.4	0.65	0.14	0.01	0.18	0.17	0.02	Sulphide	Infill
and	114.0	116.0	2.0	0.93	0.18	0.01	0.19	0.03	0.02	Sulphide	Infill
and	132.0	134.5	2.5	0.67	0.13	0.01	0.18	0.18	0.02	Sulphide	Infill
JD150	139.0	154.5	15.5	0.51	0.12	0.01	0.16	0.06	0.01	Sulphide	Infill
JD150	168.0	173.0	5.0	0.40	0.12	0.01	0.15	0.10	0.01	Sulphide	Infill
JD150	187.6	194.0	6.4	0.59	0.08	0.02	0.14	0.09	0.01	Sulphide	Infill
JD150	221.0	254.0	33.0	1.31	0.27	0.02	0.21	0.10	0.02	Sulphide	Infill
Incl	221.0	229.0	8.0	3.54	0.74	0.06	0.37	0.19	0.03	Sulphide	Infill
and	236.0	239.0	3.0	0.78	0.16	0.02	0.20	0.05	0.02	Sulphide	Infill
and	244.0	246.0	2.0	1.11	0.20	0.02	0.23	0.56	0.02	Sulphide	Infill
JD150	277.7	308.8	31.1	0.57	0.15	0.01	0.18	0.06	0.01	Sulphide	Infill

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
Incl	277.7	280.0	2.3	1.27	0.24	0.06	0.41	0.47	0.03	Sulphide	Infill
JD150	328.0	345.5	17.5	0.50	0.10	0.01	0.18	0.04	0.02	Sulphide	Infill
JD153	13.5	23.0	9.5	1.07	0.27	0.01	0.14	0.10	0.02	Oxide	Infill
Incl	14.9	21.0	6.1	1.24	0.33	0.01	0.14	0.11	0.02	Oxide	Infill
JD153	27.0	68.5	41.5	0.60	0.13	0.02	0.15	0.05	0.01	Sulphide	Infill
Incl	51.0	54.0	3.0	1.16	0.22	0.01	0.15	0.06	0.01	Sulphide	Infill
and	65.0	68.5	3.5	1.02	0.25	0.11	0.13	0.08	0.01	Sulphide	Infill
JD156	58.4	66.0	7.6	0.49	0.11	0.01	0.15	0.08	0.02	Sulphide	Infill
JD156	76.0	169.0	93.0	0.61	0.13	0.01	0.15	0.06	0.02	Sulphide	Infill
Incl	77.0	81.0	4.0	0.87	0.19	0.01	0.16	0.07	0.02	Sulphide	Infill
and	96.0	103.0	7.0	0.94	0.19	0.01	0.18	0.14	0.02	Sulphide	Infill
and	122.0	125.0	3.0	0.82	0.17	0.01	0.21	0.07	0.02	Sulphide	Infill
and	135.0	142.0	7.0	0.91	0.23	0.01	0.18	0.08	0.02	Sulphide	Infill
and	154.0	157.0	3.0	1.20	0.26	<0.01	0.15	0.08	0.01	Sulphide	Infill
JD156	174.0	179.0	5.0	0.57	0.11	<0.01	0.16	0.02	0.01	Sulphide	Infill
JD156	242.2	249.3	7.1	0.43	0.08	0.01	0.23	0.02	0.02	Sulphide	Infill
JD156	285.0	293.0	8.0	0.54	0.11	0.01	0.14	0.07	0.01	Sulphide	Infill
JD156	334.0	346.5	12.5	0.37	0.08	0.01	0.15	0.06	0.02	Sulphide	Infill
JD156	379.0	403.9	24.9	0.49	0.11	0.02	0.13	0.04	0.01	Sulphide	Infill
JD156	416.0	421.4	5.4	0.56	0.12	0.03	0.17	0.03	0.01	Sulphide	Infill
JD157	196.0	253.0	57.0	0.67	0.13	0.01	0.16	0.07	0.02	Sulphide	Infill
Incl	206.2	213.5	7.3	1.18	0.15	0.02	0.33	0.15	0.03	Sulphide	Infill
and	239.0	242.0	3.0	0.87	0.16	<0.01	0.18	0.09	0.02	Sulphide	Infill
and	250.0	253.0	3.0	1.10	0.19	0.01	0.17	0.08	0.02	Sulphide	Infill
JD157	264.0	290.0	26.0	0.84	0.17	0.02	0.16	0.10	0.02	Sulphide	Ext
Incl	270.0	281.0	11.0	1.14	0.24	0.02	0.17	0.15	0.02	Sulphide	Ext
and	286.0	288.0	2.0	0.89	0.17	0.01	0.20	0.07	0.02	Sulphide	Infill
JD157	295.0	317.2	22.2	0.49	0.12	0.01	0.15	0.05	0.01	Sulphide	Ext
JD157	324.0	351.0	27.0	0.78	0.12	0.01	0.22	0.18	0.03	Sulphide	Ext
Incl	324.0	328.0	4.0	1.31	0.27	0.01	0.16	0.21	0.02	Sulphide	Ext
JD157	357.1	362.3	5.2	0.50	0.13	0.01	0.13	0.07	0.01	Sulphide	Ext
JD157	363.8	368.4	4.7	0.54	0.11	0.01	0.12	0.07	0.01	Sulphide	Ext
JD157	371.0	391.8	20.8	0.43	0.09	0.01	0.12	0.10	0.01	Sulphide	Ext
JD157	405.2	444.0	38.8	0.43	0.09	0.01	0.14	0.07	0.02	Sulphide	Ext
JD157	450.0	454.0	4.0	0.34	0.08	0.01	0.14	0.19	0.02	Sulphide	Ext
JD157	464.0	489.0	25.0	0.66	0.13	0.01	0.21	0.05	0.02	Sulphide	Ext
JD157	509.4	535.0	25.6	1.85	0.72	0.02	0.26	0.33	0.02	Sulphide	Ext
Incl	513.0	520.1	7.1	2.32	0.92	0.04	0.27	0.90	0.02	Sulphide	Ext
and	523.0	527.4	4.4	4.49	2.22	0.05	0.57	0.23	0.03	Sulphide	Ext
JD157	539.4	573.5	34.1	0.62	0.12	0.02	0.18	0.05	0.02	Sulphide	Ext
Incl	553.0	561.0	8.0	0.80	0.14	0.02	0.22	0.09	0.02	Sulphide	Ext

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
JD157	631.9	674.0	42.1	0.47	0.12	0.01	0.16	0.05	0.01	Sulphide	Ext
JD157	679.0	686.0	7.0	0.61	0.14	0.08	0.16	0.16	0.02	Sulphide	Ext
Incl	680.0	684.6	4.6	0.63	0.13	0.12	0.20	0.18	0.02	Sulphide	Ext
JD158	10.0	25.0	15.0	0.69	0.31	0.02	0.11	0.12	0.08	Oxide	Infill
JD158	35.1	79.0	43.9	0.57	0.12	0.01	0.15	0.05	0.02	Sulphide	Infill
Incl	69.2	72.0	2.8	1.03	0.21	0.01	0.16	0.04	0.02	Sulphide	Infill
JD158	85.0	146.0	61.0	0.64	0.14	0.01	0.14	0.05	0.01	Sulphide	Infill
Incl	96.0	98.0	2.0	0.77	0.15	0.01	0.19	0.05	0.02	Sulphide	Infill
and	138.0	141.0	3.0	0.97	0.20	0.01	0.16	0.07	0.02	Sulphide	Infill
JD158	153.0	167.0	14.0	0.50	0.11	<0.01	0.15	0.04	0.01	Sulphide	Infill
JD158	209.0	242.0	33.0	1.87	0.35	0.05	0.25	0.14	0.02	Sulphide	Infill
Incl	213.0	236.0	23.0	2.49	0.46	0.07	0.29	0.19	0.02	Sulphide	Infill
JD158	252.0	261.0	9.0	0.51	0.09	0.01	0.16	0.07	0.01	Sulphide	Infill
JD159	9.0	21.0	12.0	0.88	0.27	0.01	0.07	0.13	0.04	Oxide	Infill
Incl	16.3	20.5	4.2	1.27	0.52	0.01	0.11	0.18	0.09	Oxide	Infill
JD159	24.0	36.0	12.0	0.46	0.10	0.01	0.17	0.08	0.02	Sulphide	Infill
JD159	47.0	58.2	11.2	0.48	0.10	0.01	0.14	0.06	0.01	Sulphide	Infill
Incl	50.0	53.0	3.0	0.81	0.17	0.01	0.17	0.05	0.02	Sulphide	Infill
JD159	62.3	111.7	49.4	0.61	0.14	0.02	0.15	0.09	0.01	Sulphide	Infill
Incl	69.0	72.4	3.4	0.89	0.19	0.02	0.17	0.13	0.02	Sulphide	Infill
and	90.5	97.0	6.6	1.02	0.22	0.05	0.19	0.11	0.02	Sulphide	Infill
and	101.5	108.0	6.5	1.03	0.20	0.04	0.17	0.22	0.02	Sulphide	Infill
JD159	174.1	189.0	14.9	0.67	0.14	<0.01	0.16	0.04	0.02	Sulphide	Infill
Incl	186.0	189.0	3.0	0.88	0.21	0.01	0.17	0.11	0.02	Sulphide	Infill
JD159	200.4	256.0	55.6	0.63	0.13	<0.01	0.14	0.05	0.01	Sulphide	Infill
Incl	202.0	208.0	6.0	1.07	0.27	<0.01	0.16	0.03	0.01	Sulphide	Infill
and	252.0	256.0	4.0	0.88	0.15	0.01	0.16	0.06	0.02	Sulphide	Infill
JD159	267.0	275.0	8.0	0.82	0.15	0.01	0.15	0.08	0.02	Sulphide	Infill
Incl	273.0	275.0	2.0	1.70	0.21	0.02	0.21	0.11	0.02	Sulphide	Infill
JD159	281.0	380.8	99.8	0.86	0.14	0.01	0.22	0.09	0.02	Sulphide	Infill
Incl	284.3	290.0	5.6	0.84	0.18	0.02	0.18	0.09	0.02	Sulphide	Infill
and	299.3	307.0	7.7	1.06	0.15	0.01	0.22	0.06	0.02	Sulphide	Infill
and	313.0	315.0	2.0	0.93	0.12	0.01	0.24	0.07	0.02	Sulphide	Infill
and	319.0	326.1	7.1	1.19	0.27	0.02	0.17	0.08	0.01	Sulphide	Infill
and	334.0	336.0	2.0	2.45	0.43	0.01	0.49	0.24	0.04	Sulphide	Infill
and	338.4	342.0	3.7	4.90	0.29	0.05	1.49	0.84	0.09	Sulphide	Infill
and	358.1	360.2	2.1	4.14	0.38	0.02	0.48	0.14	0.03	Sulphide	Infill
JD160	8.0	25.1	17.1	1.56	0.47	0.01	0.16	0.17	0.13	Oxide	Infill
Incl	9.0	24.0	15.0	1.71	0.52	0.02	0.16	0.19	0.15	Oxide	Infill
JD160	30.0	35.2	5.2	0.54	0.12	0.01	0.14	0.09	0.02	Sulphide	Infill
JD160	40.0	139.2	99.2	0.59	0.13	0.02	0.15	0.09	0.02	Sulphide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
Incl	51.0	53.0	2.0	0.62	0.15	0.10	0.15	0.21	0.02	Sulphide	Infill
and	94.0	105.0	11.0	0.72	0.17	0.02	0.19	0.14	0.02	Sulphide	Infill
and	115.0	128.0	13.0	0.91	0.20	0.01	0.17	0.12	0.02	Sulphide	Infill
JD161	39.0	80.0	41.0	0.59	0.12	0.02	0.15	0.08	0.02	Sulphide	Infill
Incl	65.0	70.0	5.0	0.91	0.17	0.02	0.23	0.09	0.02	Sulphide	Infill
and	75.0	79.0	4.0	0.78	0.15	0.08	0.16	0.26	0.02	Sulphide	Infill
JD161	90.2	236.0	145.8	0.97	0.24	0.10	0.14	0.08	0.01	Sulphide	Infill
Incl	116.0	122.0	6.0	1.07	0.38	0.05	0.14	0.09	0.02	Sulphide	Infill
and	126.0	138.0	12.0	1.02	0.26	0.04	0.16	0.05	0.01	Sulphide	Infill
and	157.0	161.0	4.0	0.87	0.21	0.12	0.15	0.06	0.01	Sulphide	Infill
and	166.0	175.0	9.0	1.09	0.29	0.22	0.15	0.12	0.01	Sulphide	Infill
and	180.0	188.0	8.0	1.72	0.39	0.22	0.16	0.10	0.01	Sulphide	Infill
and	200.0	205.0	5.0	3.90	1.20	0.11	0.13	0.05	0.01	Sulphide	Infill
and	209.0	223.0	14.0	1.43	0.15	0.31	0.14	0.24	0.01	Sulphide	Ext
and	233.0	235.0	2.0	5.63	2.26	0.31	0.20	0.13	0.02	Sulphide	Ext
JD162	6.8	17.0	10.2	1.02	0.46	0.01	0.14	0.16	0.10	Oxide	Infill
Incl	7.0	14.7	7.7	1.10	0.51	0.01	0.13	0.16	0.11	Oxide	Infill
JD162	32.1	135.2	103.1	0.96	0.20	0.01	0.18	0.09	0.02	Sulphide	Infill
Incl	32.1	37.0	4.9	0.78	0.16	0.01	0.17	0.09	0.02	Sulphide	Infill
and	66.0	76.9	10.9	0.96	0.20	0.01	0.19	0.08	0.02	Sulphide	Infill
and	96.0	101.0	5.0	0.67	0.15	0.01	0.20	0.11	0.02	Sulphide	Infill
and	107.3	115.0	7.8	4.27	0.84	0.07	0.37	0.31	0.03	Sulphide	Infill
JD162	145.0	157.0	12.0	0.46	0.10	<0.01	0.17	0.04	0.02	Sulphide	Infill
JD162	170.6	179.0	8.4	4.19	0.88	0.03	0.70	0.43	0.05	Sulphide	Infill
Incl	170.6	177.7	7.1	4.86	1.02	0.03	0.80	0.50	0.05	Sulphide	Infill
JD162	200.0	249.8	49.8	0.68	0.15	0.02	0.19	0.03	0.02	Sulphide	Infill
Incl	200.0	202.4	2.4	4.54	0.80	0.06	0.89	0.24	0.06	Sulphide	Infill
JD162	293.3	301.0	7.7	0.46	0.09	<0.01	0.16	0.02	0.01	Sulphide	Infill
JD162	306.0	364.0	58.0	0.87	0.11	0.18	0.16	0.08	0.01	Sulphide	Infill
Incl	350.0	353.0	3.0	1.88	0.17	0.16	0.15	0.48	0.02	Sulphide	Infill
and	357.0	364.0	7.0	3.20	0.09	1.26	0.16	0.21	0.02	Sulphide	Infill
JD162	371.0	429.2	58.2	0.72	0.21	0.09	0.16	0.18	0.01	Sulphide	Infill
Incl	379.0	382.7	3.7	0.39	0.09	0.15	0.17	0.30	0.02	Sulphide	Infill
and	392.0	412.3	20.3	1.06	0.25	0.16	0.19	0.34	0.02	Sulphide	Infill
and	417.3	421.5	4.2	1.34	0.34	0.03	0.21	0.20	0.02	Sulphide	Infill
and	427.0	429.2	2.2	0.78	0.26	0.01	0.18	0.16	0.02	Sulphide	Infill
JD162	436.8	441.0	4.2	0.61	0.13	0.02	0.18	0.12	0.02	Sulphide	Infill
Incl	436.8	439.0	2.2	0.64	0.12	0.02	0.22	0.14	0.02	Sulphide	Infill
JD162	447.0	466.1	19.1	1.16	0.52	0.47	0.11	0.12	0.01	Sulphide	Ext
Incl	455.0	463.2	8.2	2.20	1.13	1.07	0.10	0.12	0.01	Sulphide	Ext
JD163	68.6	83.0	14.4	0.51	0.11	0.02	0.15	0.05	0.02	Sulphide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
JD166	234.0	238.0	4.0	0.36	0.87	0.01	0.03	0.02	0.01	Sulphide	Ext
JD166	243.0	248.0	5.0	0.58	0.48	0.12	0.06	0.10	0.01	Sulphide	Ext
JD166	325.0	339.0	14.0	0.89	0.19	<0.01	0.17	0.09	0.02	Sulphide	Ext
Incl	330.0	339.0	9.0	0.96	0.20	<0.01	0.17	0.11	0.02	Sulphide	Ext
JD167	10.5	19.4	8.9	1.20	0.33	0.03	0.14	0.12	0.06	Oxide	Infill
Incl	13.0	19.4	6.4	1.44	0.42	0.03	0.17	0.15	0.07	Oxide	Infill
JD167	24.5	37.6	13.1	0.75	0.22	<0.01	0.18	0.06	0.02	Oxide	Infill
JD167	137.0	174.0	37.0	0.90	0.20	0.06	0.16	0.14	0.02	Sulphide	Ext
Incl	157.0	162.0	5.0	3.29	0.77	0.23	0.27	0.67	0.02	Sulphide	Ext
JD168	13.0	26.0	13.0	0.77	0.27	0.01	0.11	0.09	0.05	Oxide	Infill
Incl	14.0	16.0	2.0	1.00	0.42	<0.01	0.05	0.10	0.08	Oxide	Infill
JD168	38.0	44.0	6.0	0.51	0.12	0.02	0.13	0.06	0.01	Oxide	Infill
JD168	49.0	55.4	6.4	0.57	0.14	0.02	0.15	0.04	0.01	Oxide	Infill
JD168	91.0	95.0	4.0	0.45	0.08	0.01	0.17	0.02	0.02	Sulphide	Infill
JD168	110.0	121.5	11.5	0.50	0.09	<0.01	0.15	0.01	0.01	Sulphide	Infill
JD168	123.3	133.0	9.8	0.41	0.09	0.01	0.16	0.05	0.02	Sulphide	Infill
JD168	137.7	185.0	47.4	0.64	0.13	0.01	0.14	0.05	0.01	Sulphide	Infill
Incl	137.7	140.0	2.4	0.85	0.17	0.01	0.17	0.06	0.02	Sulphide	Infill
and	168.0	170.0	2.0	0.80	0.17	0.01	0.18	0.13	0.02	Sulphide	Infill
JD168	190.0	194.0	4.0	0.47	0.11	<0.01	0.16	0.04	0.02	Sulphide	Infill
JD168	201.0	215.0	14.0	0.51	0.11	0.01	0.13	0.06	0.01	Sulphide	Infill
JD168	243.8	249.0	5.2	0.45	0.11	0.02	0.14	0.08	0.02	Sulphide	Infill
JD168	262.0	268.0	6.0	0.51	0.10	0.01	0.15	0.08	0.02	Sulphide	Infill
JD168	275.0	293.0	18.0	0.58	0.13	0.01	0.16	0.03	0.01	Sulphide	Infill
Incl	289.4	293.0	3.6	0.84	0.17	0.01	0.19	0.03	0.01	Sulphide	Infill
JD168	298.4	321.0	22.7	0.97	0.15	0.02	0.26	0.16	0.02	Sulphide	Infill
Incl	308.1	312.0	3.9	3.08	0.30	0.02	0.94	0.33	0.06	Sulphide	Infill
and	317.0	321.0	4.0	0.80	0.16	0.05	0.13	0.38	0.01	Sulphide	Infill
JD168	326.4	346.3	19.9	0.61	0.12	0.01	0.16	0.13	0.01	Sulphide	Infill
Incl	333.0	336.5	3.5	1.02	0.19	0.01	0.27	0.28	0.02	Sulphide	Infill
JD170	97.0	120.0	23.0	0.75	0.16	<0.01	0.17	0.09	0.02	Sulphide	Infill
Incl	103.2	120.0	16.9	0.79	0.17	<0.01	0.17	0.10	0.02	Sulphide	Infill
JD170	172.0	206.0	34.0	0.56	0.13	<0.01	0.16	0.05	0.01	Sulphide	Infill
JD170	275.0	282.0	7.0	0.58	0.12	0.03	0.13	0.03	0.01	Sulphide	Infill
JD170	294.0	300.0	6.0	1.01	0.27	0.06	0.21	0.34	0.02	Sulphide	Infill
Incl	295.0	300.0	5.0	1.13	0.31	0.07	0.23	0.39	0.03	Sulphide	Infill
JD170	304.8	307.0	2.2	1.63	0.23	0.02	0.57	0.61	0.07	Sulphide	Infill
JD170	328.0	341.0	13.0	0.47	0.11	0.01	0.17	0.02	0.02	Sulphide	Infill
JD171	9.0	36.0	27.0	1.47	0.50	0.13	0.17	0.19	0.03	Oxide	Infill
Incl	10.0	33.8	23.8	1.61	0.54	0.13	0.18	0.20	0.04	Oxide	Infill
JD171	41.0	45.4	4.4	1.86	0.27	0.10	0.16	0.07	0.01	Oxide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
JD171	45.4	73.8	28.4	1.00	0.22	0.09	0.14	0.06	0.01	Sulphide	Infill
Incl	45.4	48.0	2.6	4.87	0.92	0.38	0.13	0.10	0.02	Sulphide	Infill
and	59.0	63.0	4.0	0.96	0.22	0.04	0.13	0.08	0.01	Sulphide	Infill
and	71.0	73.0	2.0	1.14	0.31	0.10	0.16	0.12	0.01	Sulphide	Infill
JD171	83.9	133.7	49.9	0.89	0.22	0.12	0.16	0.12	0.01	Sulphide	Infill
Incl	90.0	101.0	11.0	0.87	0.28	0.04	0.16	0.06	0.01	Sulphide	Infill
and	108.0	122.0	14.0	1.40	0.31	0.06	0.20	0.12	0.01	Sulphide	Infill
JD171	146.4	154.0	7.6	0.51	0.17	0.12	0.13	0.12	0.01	Sulphide	Infill
JD172	80.6	172.0	91.4	0.58	0.14	0.02	0.14	0.11	0.02	Sulphide	Infill
Incl	105.0	107.5	2.5	0.58	0.13	0.02	0.24	0.31	0.03	Sulphide	Infill
and	111.0	115.0	4.0	0.89	0.27	0.03	0.16	0.15	0.02	Sulphide	Infill
and	137.0	150.9	13.9	0.97	0.20	0.02	0.16	0.16	0.02	Sulphide	Infill
JD172	207.9	212.9	5.1	0.57	0.12	<0.01	0.16	0.07	0.02	Sulphide	Infill
JD172	269.0	276.0	7.0	0.39	0.08	<0.01	0.15	0.06	0.02	Sulphide	Infill
JD172	280.0	384.0	104.0	0.70	0.16	0.01	0.17	0.08	0.02	Sulphide	Ext
Incl	301.9	305.0	3.1	0.83	0.17	<0.01	0.20	0.04	0.02	Sulphide	Infill
and	332.0	334.0	2.0	0.98	0.19	<0.01	0.18	0.03	0.02	Sulphide	Ext
and	355.0	367.9	12.9	1.24	0.33	0.02	0.29	0.31	0.02	Sulphide	Ext
and	381.4	384.0	2.6	1.73	0.40	0.06	0.13	0.17	0.01	Sulphide	Ext
JD172	409.0	474.2	65.2	0.74	0.19	0.05	0.13	0.07	0.01	Sulphide	Ext
Incl	422.0	426.0	4.0	0.64	0.10	0.09	0.18	0.15	0.02	Sulphide	Ext
and	442.0	465.7	23.7	1.12	0.32	0.04	0.12	0.07	0.01	Sulphide	Ext
and	468.0	470.0	2.0	1.48	0.46	0.19	0.11	0.04	0.01	Sulphide	Ext
JD173	4.0	42.0	38.0	1.60	0.44	0.10	0.17	0.11	0.02	Oxide	Infill
Incl	5.0	39.0	34.0	1.71	0.47	0.11	0.17	0.12	0.02	Oxide	Infill
JD173	43.0	77.0	34.0	0.82	0.20	0.03	0.18	0.06	0.01	Sulphide	Infill
Incl	43.0	50.0	7.0	1.47	0.33	0.04	0.19	0.07	0.02	Sulphide	Infill
and	72.0	76.0	4.0	0.90	0.29	0.04	0.16	0.13	0.01	Sulphide	Infill
JD173	91.0	94.4	3.4	1.23	0.19	0.04	0.18	0.06	0.02	Sulphide	Infill
JD173	99.8	112.0	12.3	0.77	0.45	0.04	0.16	0.05	0.01	Sulphide	Infill
Incl	99.8	102.0	2.3	2.34	0.73	0.06	0.34	0.07	0.03	Sulphide	Infill
JD173	120.0	125.0	5.0	0.81	0.24	0.04	0.09	0.05	0.01	Sulphide	Infill
JD174	7.0	39.0	32.0	1.37	0.39	0.04	0.20	0.16	0.03	Oxide	Infill
Incl	9.0	26.5	17.5	2.04	0.59	0.03	0.20	0.22	0.05	Oxide	Infill
and	29.0	31.0	2.0	1.14	0.20	0.10	0.24	0.09	0.02	Oxide	Infill
JD174	39.0	59.0	20.0	0.53	0.14	0.01	0.14	0.05	0.01	Sulphide	Infill
JD174	63.4	113.3	49.9	0.70	0.16	0.04	0.17	0.13	0.01	Sulphide	Infill
Incl	67.0	72.0	5.0	0.86	0.26	0.06	0.16	0.15	0.01	Sulphide	Infill
and	89.0	94.0	5.0	0.74	0.16	0.05	0.17	0.15	0.01	Sulphide	Infill
and	97.0	113.3	16.3	0.92	0.20	0.04	0.19	0.16	0.02	Sulphide	Infill
JD175	9.0	25.0	16.0	0.74	0.04	0.01	0.04	0.06	<0.01	Oxide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
Incl	11.0	16.8	5.8	1.10	0.05	0.02	0.05	0.08	<0.01	Oxide	Infill
JD175	80.7	101.6	20.9	0.69	0.16	0.04	0.15	0.14	0.01	Sulphide	Infill
Incl	85.0	89.0	4.0	0.76	0.18	0.04	0.17	0.25	0.02	Sulphide	Infill
and	92.0	99.0	7.0	0.87	0.19	0.04	0.16	0.11	0.01	Sulphide	Infill
JD176	8.4	22.0	13.6	1.04	0.27	0.01	0.09	0.10	0.03	Oxide	Infill
Incl	14.0	19.7	5.7	1.54	0.39	0.01	0.13	0.16	0.06	Oxide	Infill
JD176	22.0	32.0	10.0	0.70	0.14	0.02	0.15	0.10	0.02	Sulphide	Infill
Incl	23.0	25.0	2.0	0.86	0.17	0.04	0.16	0.14	0.02	Sulphide	Infill
and	30.0	32.0	2.0	0.99	0.19	0.02	0.18	0.10	0.02	Sulphide	Infill
JD176	37.0	54.0	17.0	0.50	0.12	0.01	0.14	0.04	0.01	Sulphide	Infill
JD176	63.0	72.8	9.8	1.03	0.20	0.02	0.17	0.05	0.02	Sulphide	Infill
Incl	64.0	72.8	8.8	1.07	0.21	0.02	0.17	0.05	0.02	Sulphide	Infill
JD176	142.0	204.0	62.0	0.71	0.13	0.01	0.18	0.11	0.02	Sulphide	Infill
Incl	151.3	157.0	5.7	0.76	0.15	0.01	0.20	0.05	0.02	Sulphide	Infill
and	165.0	167.0	2.0	1.12	0.21	0.01	0.22	0.07	0.02	Sulphide	Infill
and	187.0	196.0	9.0	0.83	0.15	<0.01	0.21	0.07	0.02	Sulphide	Infill
JD176	212.0	275.0	63.0	0.57	0.11	0.01	0.15	0.05	0.02	Sulphide	Infill
Incl	220.0	224.0	4.0	1.09	0.20	0.01	0.15	0.08	0.01	Sulphide	Infill
and	260.0	263.0	3.0	0.83	0.17	0.01	0.17	0.08	0.02	Sulphide	Infill
JD176	281.0	302.9	21.9	0.66	0.13	0.02	0.22	0.23	0.02	Sulphide	Infill
Incl	281.0	285.0	4.0	0.93	0.06	0.06	0.25	0.98	0.02	Sulphide	Infill
JD176	309.0	360.0	51.0	0.58	0.12	0.01	0.16	0.08	0.01	Sulphide	Infill
Incl	336.0	339.0	3.0	0.86	0.22	0.01	0.18	0.11	0.02	Sulphide	Infill
and	356.0	360.0	4.0	0.62	0.03	0.02	0.18	0.57	0.02	Sulphide	Infill
JD176	370.0	386.0	16.0	0.49	0.11	0.01	0.16	0.13	0.01	Sulphide	Infill
JD177	9.0	17.0	8.0	1.30	0.39	0.01	0.15	0.10	0.07	Oxide	Infill
JD177	21.2	27.0	5.8	1.16	0.25	0.02	0.27	0.14	0.02	Oxide	Infill
Incl	22.0	24.0	2.0	2.56	0.20	0.01	0.29	0.14	0.02	Oxide	Infill
JD179	277.4	282.0	4.6	0.72	0.17	<0.01	0.18	0.07	0.02	Sulphide	Ext
Incl	277.4	280.0	2.6	0.92	0.18	<0.01	0.22	0.05	0.02	Sulphide	Ext
JD180	5.0	15.2	10.2	1.57	0.35	0.01	0.19	0.28	0.09	Oxide	Infill
Incl	6.9	15.2	8.3	1.89	0.32	0.02	0.23	0.29	0.12	Oxide	Infill
JD180	22.0	36.6	14.6	0.60	0.16	0.01	0.16	0.09	0.02	Oxide	Infill
JD180	36.6	44.9	8.4	1.67	2.64	0.01	0.50	0.43	0.03	Sulphide	Infill
Incl	42.5	44.9	2.5	4.62	8.79	0.03	1.40	1.21	0.07	Sulphide	Infill
JD180	53.0	64.0	11.0	1.87	0.44	0.02	1.22	0.25	0.06	Sulphide	Infill
Incl	53.0	59.9	6.9	2.48	0.70	0.02	1.92	0.36	0.09	Sulphide	Infill
JD180	97.9	112.9	15.0	2.50	0.67	0.02	0.37	0.15	0.03	Sulphide	Infill
Incl	97.9	101.0	3.1	2.73	0.63	0.03	0.30	0.26	0.03	Sulphide	Infill
and	104.0	112.9	8.9	3.14	0.86	0.02	0.47	0.17	0.03	Sulphide	Infill
JD180	156.6	170.0	13.4	1.43	0.25	0.01	0.27	0.11	0.03	Sulphide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
Incl	156.6	160.8	4.2	3.33	0.55	0.01	0.48	0.20	0.04	Sulphide	Infill
and	164.0	169.0	5.0	0.73	0.15	0.01	0.21	0.09	0.02	Sulphide	Infill
JD180	182.0	188.6	6.6	0.45	0.15	0.01	0.14	0.03	0.01	Sulphide	Infill
JD181	375.1	400.0	24.9	0.48	0.12	<0.01	0.17	0.07	0.02	Sulphide	Ext
Incl	385.6	391.0	5.4	0.83	0.21	<0.01	0.22	0.17	0.02	Sulphide	Ext
JD181	405.0	409.2	4.2	0.70	0.16	0.01	0.17	0.03	0.02	Sulphide	Ext
JD181	415.0	434.0	19.0	0.61	0.13	0.01	0.17	0.10	0.02	Sulphide	Ext
Incl	424.0	428.0	4.0	1.12	0.19	0.01	0.20	0.25	0.02	Sulphide	Ext
JD181	445.0	489.5	44.5	0.78	0.15	0.04	0.19	0.25	0.02	Sulphide	Ext
Incl	445.0	470.0	25.0	0.88	0.17	0.02	0.21	0.23	0.02	Sulphide	Ext
and	473.0	479.0	6.0	0.63	0.12	0.04	0.19	0.32	0.02	Sulphide	Ext
and	483.0	489.5	6.5	0.83	0.17	0.12	0.15	0.49	0.01	Sulphide	Ext
JD181	495.8	507.2	11.4	0.87	0.14	0.29	0.12	0.35	0.01	Sulphide	Ext
Incl	499.0	507.2	8.2	1.09	0.18	0.36	0.13	0.43	0.01	Sulphide	Ext
JD211	139.2	141.2	2.0	1.79	0.23	0.01	0.63	0.49	0.06	Sulphide	Ext
JRC028D	264.0	270.3	6.3	2.18	0.60	0.10	0.13	0.04	0.01	Sulphide	Ext
JRC028D	280.9	283.1	2.2	3.93	2.88	1.41	0.12	0.11	0.01	Sulphide	Ext
JRC087D	271.1	277.0	5.9	0.45	0.24	0.02	0.15	0.06	0.01	Sulphide	Ext
JRC087D	294.0	305.9	11.9	1.22	0.45	0.03	0.15	0.04	0.01	Sulphide	Ext
Incl	296.0	298.0	2.0	1.10	0.20	0.02	0.20	0.08	0.02	Sulphide	Ext
JRC087D	327.6	330.0	2.4	2.57	1.57	0.17	0.08	0.04	0.01	Sulphide	Ext
JRC109D	251.0	273.0	22.0	1.08	0.29	0.03	0.14	0.05	0.01	Sulphide	Infill
JRC109D	281.0	293.0	12.0	0.45	0.11	0.04	0.14	0.08	0.01	Sulphide	Infill
JRC209D	264.4	283.0	18.6	1.00	0.27	0.03	0.14	0.05	0.01	Sulphide	Infill
Incl	267.0	272.0	5.0	1.64	0.42	0.03	0.14	0.04	0.01	Sulphide	Infill
JRC209D	288.0	302.0	14.0	0.60	0.12	0.07	0.12	0.07	0.01	Sulphide	Infill
Incl	294.0	296.0	2.0	0.97	0.18	0.25	0.15	0.21	0.01	Sulphide	Infill
JRC272D	356.0	396.6	40.6	0.91	0.22	0.09	0.17	0.14	0.02	Sulphide	Ext
JRC272D	406.0	435.3	29.3	0.44	0.12	0.02	0.13	0.05	0.01	Sulphide	Ext
JRC274D	182.0	186.0	4.0	0.46	0.09	0.01	0.13	0.08	0.02	Sulphide	Infill
JRC274D	192.0	222.0	30.0	0.70	0.15	0.01	0.12	0.06	0.01	Sulphide	Infill
JRC274D	227.0	260.0	33.0	0.51	0.12	0.01	0.15	0.11	0.01	Sulphide	Infill
JRC274D	264.1	268.0	4.0	3.60	0.73	0.03	0.81	0.43	0.06	Sulphide	Infill
JRC274D	289.2	297.0	7.8	0.80	0.15	0.01	0.31	0.12	0.02	Sulphide	Infill
JRC274D	303.0	308.0	5.0	0.71	0.13	0.02	0.14	0.17	0.01	Sulphide	Infill
Incl	304.0	306.2	2.2	0.84	0.16	0.03	0.18	0.27	0.01	Sulphide	Infill
JRC274D	324.0	330.0	6.0	0.50	0.10	<0.01	0.16	0.08	0.02	Sulphide	Infill
JRC274D	335.0	359.0	24.0	0.46	0.10	0.01	0.14	0.09	0.02	Sulphide	Infill
JRC274D	365.5	378.0	12.5	0.61	0.13	0.04	0.11	0.15	0.01	Sulphide	Infill
Incl	369.0	373.0	4.0	1.23	0.25	0.09	0.15	0.28	0.01	Sulphide	Infill
JRC274D	384.0	400.0	16.0	0.59	0.12	0.01	0.17	0.03	0.01	Sulphide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
JRC274D	408.0	418.1	10.1	0.58	0.11	0.03	0.18	0.11	0.02	Sulphide	Infill
JRC274D	425.0	433.0	8.0	0.48	0.11	0.01	0.15	0.03	0.01	Sulphide	Infill
JRC274D	453.6	458.0	4.4	0.45	0.10	0.01	0.19	0.06	0.02	Sulphide	Infill
JRC274D	497.3	521.0	23.7	0.58	0.11	0.02	0.13	0.07	0.01	Sulphide	Ext
Incl	516.0	519.0	3.0	1.72	0.18	0.04	0.15	0.04	0.02	Sulphide	Ext
JRC345D	272.0	305.0	33.0	0.90	0.21	0.03	0.20	0.08	0.02	Sulphide	Infill
Incl	295.0	298.0	3.0	1.02	0.15	0.02	0.17	0.05	0.02	Sulphide	Infill
JRC345D	324.8	365.0	40.2	0.62	0.12	0.02	0.16	0.08	0.02	Sulphide	Ext
Incl	349.0	352.0	3.0	0.84	0.14	0.01	0.20	0.12	0.02	Sulphide	Ext
and	358.0	360.0	2.0	1.80	0.34	0.05	0.18	0.08	0.02	Sulphide	Ext
JRC366	135.0	141.0	6.0	1.11	0.56	0.05	0.16	0.10	0.01	Sulphide	Ext
JRC367	185.0	195.0	10.0	0.72	0.29	0.03	0.08	0.02	0.01	Sulphide	Ext
JRC367	210.0	216.0	6.0	0.84	0.29	0.03	0.15	0.14	0.02	Sulphide	Ext
Incl	211.0	216.0	5.0	0.89	0.31	0.03	0.15	0.15	0.02	Sulphide	Ext
JRC368	206.0	225.0	19.0	0.40	0.89	0.04	0.04	0.05	0.01	Sulphide	Ext
Incl	214.0	216.0	2.0	1.40	3.76	0.05	0.04	0.02	0.01	Sulphide	Ext
JRC368	237.0	239.0	2.0	2.57	0.92	0.06	0.27	0.11	0.02	Sulphide	Ext
JRC368	249.0	251.0	2.0	1.80	0.49	0.08	0.19	0.10	0.02	Sulphide	Ext
JRC372	35.0	37.0	2.0	5.45	0.94	0.02	0.24	0.23	0.02	Oxide	Infill
JRC372	43.0	115.0	72.0	0.72	0.15	0.01	0.17	0.06	0.02	Sulphide	Infill
Incl	44.0	48.0	4.0	1.13	0.16	0.01	0.31	0.09	0.02	Sulphide	Infill
and	90.0	93.0	3.0	5.07	1.17	0.03	0.39	0.17	0.03	Sulphide	Infill
and	112.0	115.0	3.0	1.07	0.24	0.02	0.21	0.07	0.02	Sulphide	Infill
JRC372	123.0	146.0	23.0	0.69	0.16	0.02	0.17	0.08	0.02	Sulphide	Infill
Incl	136.0	142.0	6.0	1.20	0.31	0.04	0.20	0.17	0.02	Sulphide	Infill
JRC372	155.0	182.0	27.0	0.73	0.14	0.01	0.14	0.05	0.02	Sulphide	Infill
Incl	164.0	166.0	2.0	1.25	0.29	0.01	0.17	0.10	0.02	Sulphide	Infill
and	175.0	178.0	3.0	1.60	0.24	0.03	0.19	0.05	0.02	Sulphide	Infill
JRC374	14.0	38.0	24.0	0.85	0.17	<0.01	0.12	0.07	0.04	Oxide	Infill
Incl	17.0	26.0	9.0	1.37	0.25	0.01	0.10	0.12	0.08	Oxide	Infill
JRC374	41.0	48.0	7.0	0.51	0.12	<0.01	0.14	0.02	0.01	Sulphide	Infill
JRC374	58.0	95.0	37.0	0.96	0.33	<0.01	0.22	0.08	0.02	Sulphide	Infill
Incl	67.0	76.0	9.0	2.11	0.94	0.01	0.41	0.17	0.03	Sulphide	Infill
and	86.0	88.0	2.0	1.02	0.25	<0.01	0.19	0.07	0.02	Sulphide	Infill
JRC374	107.0	138.0	31.0	0.77	0.12	<0.01	0.18	0.04	0.02	Sulphide	Infill
Incl	126.0	128.0	2.0	4.42	0.41	0.01	0.35	0.09	0.03	Sulphide	Infill
JRC374	189.0	273.0	84.0	0.82	0.16	0.06	0.15	0.11	0.01	Sulphide	Infill
Incl	189.0	191.0	2.0	0.92	0.19	0.03	0.18	0.09	0.02	Sulphide	Infill
and	195.0	205.0	10.0	1.46	0.20	0.03	0.15	0.08	0.01	Sulphide	Infill
and	209.0	212.0	3.0	1.13	0.57	0.02	0.14	0.08	0.02	Sulphide	Infill
and	222.0	230.0	8.0	1.31	0.17	0.02	0.13	0.09	0.01	Sulphide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
and	233.0	235.0	2.0	1.00	0.22	0.01	0.16	0.10	0.02	Sulphide	Infill
and	243.0	264.0	21.0	0.72	0.13	0.16	0.17	0.18	0.01	Sulphide	Infill
JRC376	19.0	27.0	8.0	0.67	0.14	0.02	0.10	0.05	0.01	Oxide	Infill
Incl	20.0	22.0	2.0	0.93	0.19	0.06	0.08	0.10	0.01	Oxide	Infill
JRC376	36.0	77.0	41.0	0.71	0.16	<0.01	0.18	0.10	0.02	Sulphide	Infill
Incl	44.0	51.0	7.0	0.94	0.19	<0.01	0.25	0.10	0.02	Sulphide	Infill
and	55.0	64.0	9.0	0.92	0.27	<0.01	0.19	0.26	0.02	Sulphide	Infill
and	68.0	72.0	4.0	1.03	0.16	<0.01	0.18	0.04	0.02	Sulphide	Infill
JRC376	82.0	88.0	6.0	0.63	0.14	<0.01	0.21	0.11	0.02	Sulphide	Infill
Incl	83.0	85.0	2.0	0.78	0.17	<0.01	0.33	0.13	0.04	Sulphide	Infill
JRC377	138.0	152.0	14.0	0.71	0.17	0.01	0.22	0.20	0.02	Sulphide	Infill
Incl	143.0	152.0	9.0	0.84	0.21	0.01	0.25	0.28	0.02	Sulphide	Infill
JRC377	160.0	173.0	13.0	0.62	0.12	0.01	0.17	0.04	0.01	Sulphide	Infill
JRC380	58.0	75.0	17.0	0.70	0.18	<0.01	0.18	0.05	0.02	Sulphide	Infill
Incl	58.0	61.0	3.0	0.83	0.18	0.01	0.23	0.10	0.02	Sulphide	Infill
and	67.0	69.0	2.0	1.06	0.18	0.01	0.22	0.01	0.02	Sulphide	Infill
and	73.0	75.0	2.0	1.02	0.24	0.01	0.22	0.10	0.02	Sulphide	Infill
JRC380	107.0	148.0	41.0	0.64	0.13	<0.01	0.19	0.04	0.02	Sulphide	Infill
Incl	109.0	111.0	2.0	1.13	0.16	0.01	0.40	<0.01	0.03	Sulphide	Infill
and	124.0	126.0	2.0	0.98	0.17	<0.01	0.30	0.16	0.03	Sulphide	Infill
and	130.0	132.0	2.0	1.37	0.40	0.01	0.30	0.12	0.03	Sulphide	Infill
JRC380	153.0	192.0	39.0	0.50	0.12	<0.01	0.17	0.05	0.02	Sulphide	Infill
Incl	187.0	191.0	4.0	0.66	0.20	<0.01	0.23	0.05	0.02	Sulphide	Infill
JRC380	214.0	229.0	15.0	0.76	0.21	<0.01	0.20	0.07	0.02	Sulphide	Infill
Incl	214.0	217.0	3.0	1.46	0.42	0.01	0.40	0.15	0.03	Sulphide	Infill
JRC380	236.0	329.0	93.0	0.89	0.18	0.10	0.16	0.09	0.02	Sulphide	Infill
Incl	236.0	242.0	6.0	1.65	0.37	0.01	0.23	0.09	0.02	Sulphide	Infill
and	246.0	253.0	7.0	0.91	0.24	<0.01	0.23	0.07	0.02	Sulphide	Infill
and	282.0	292.0	10.0	1.86	0.33	0.07	0.19	0.25	0.02	Sulphide	Infill
and	312.0	329.0	17.0	0.90	0.16	0.49	0.14	0.13	0.01	Sulphide	Infill
JRC383	54.0	63.0	9.0	0.82	0.22	0.01	0.15	0.07	0.01	Oxide	Infill
Incl	58.0	62.0	4.0	1.07	0.25	0.01	0.17	0.09	0.01	Oxide	Infill
JRC383	63.0	94.0	31.0	0.76	0.15	0.01	0.19	0.07	0.02	Sulphide	Infill
Incl	63.0	72.0	9.0	1.17	0.24	0.01	0.24	0.20	0.03	Sulphide	Infill
JRC383	99.0	109.0	10.0	1.60	0.45	0.01	0.47	0.09	0.06	Sulphide	Infill
Incl	99.0	107.0	8.0	1.85	0.52	0.01	0.56	0.11	0.07	Sulphide	Infill
JRC383	165.0	187.0	22.0	0.75	0.23	<0.01	0.28	0.09	0.02	Sulphide	Infill
Incl	180.0	187.0	7.0	1.43	0.52	0.01	0.53	0.18	0.04	Sulphide	Infill
JRC383	215.0	298.0	83.0	0.87	0.18	0.04	0.16	0.08	0.02	Sulphide	Infill
Incl	219.0	221.0	2.0	1.19	0.28	0.04	0.13	0.16	0.01	Sulphide	Infill
and	227.0	244.0	17.0	1.09	0.27	0.01	0.20	0.09	0.02	Sulphide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
and	251.0	256.0	5.0	2.34	0.41	0.04	0.39	0.14	0.03	Sulphide	Infill
and	262.0	264.0	2.0	0.66	0.14	0.04	0.15	0.18	0.02	Sulphide	Infill
and	287.0	294.0	7.0	1.95	0.34	0.23	0.16	0.08	0.01	Sulphide	Infill
JRC384	6.0	11.0	5.0	0.68	0.06	0.06	0.04	0.10	<0.01	Oxide	Ext
Incl	7.0	9.0	2.0	0.96	0.06	0.08	0.03	0.09	<0.01	Oxide	Ext
JRC388	17.0	24.0	7.0	1.02	0.35	0.01	0.10	0.14	0.08	Oxide	Infill
Incl	18.0	22.0	4.0	1.18	0.46	0.01	0.11	0.16	0.09	Oxide	Infill
JRC388	29.0	34.0	5.0	0.92	0.17	0.01	0.21	0.28	0.02	Oxide	Infill
JRC388	48.0	60.0	12.0	0.58	0.12	<0.01	0.19	0.11	0.02	Oxide	Infill
JRC388	60.0	81.0	21.0	0.50	0.10	<0.01	0.15	0.03	0.01	Sulphide	Infill
JRC388	86.0	112.0	26.0	0.53	0.11	<0.01	0.14	0.05	0.01	Sulphide	Infill
Incl	99.0	104.0	5.0	0.76	0.17	<0.01	0.17	0.08	0.02	Sulphide	Infill
JRC388	150.0	170.0	20.0	0.48	0.10	0.01	0.15	0.08	0.02	Sulphide	Infill
Incl	152.0	154.0	2.0	0.64	0.13	0.01	0.18	0.22	0.02	Sulphide	Infill
JRC388	187.0	204.0	17.0	0.64	0.12	0.01	0.15	0.04	0.02	Sulphide	Infill
JRC388	216.0	278.0	62.0	0.56	0.13	0.06	0.15	0.10	0.01	Sulphide	Ext
Incl	217.0	219.0	2.0	1.39	0.42	0.05	0.16	0.14	0.02	Sulphide	Infill
and	273.0	276.0	3.0	0.85	0.18	0.02	0.15	0.08	0.01	Sulphide	Ext
JRC389	137.0	141.0	4.0	0.60	0.13	0.02	0.13	0.06	0.01	Sulphide	Infill
JRC389	202.0	236.0	34.0	0.46	0.08	0.01	0.17	0.08	0.02	Sulphide	Ext
Incl	219.0	221.0	2.0	0.83	0.11	0.01	0.29	0.13	0.03	Sulphide	Ext
JRC390	117.0	125.0	8.0	0.53	0.23	0.02	0.09	0.07	0.01	Sulphide	Ext
JRC391	11.0	15.0	4.0	0.66	0.13	0.01	0.08	0.07	0.01	Oxide	Infill
JRC391	27.0	35.0	8.0	0.69	0.14	0.01	0.21	0.13	0.02	Sulphide	Infill
Incl	28.0	31.0	3.0	0.85	0.17	0.01	0.28	0.17	0.03	Sulphide	Infill
JRC391	46.0	55.0	9.0	0.85	0.15	0.01	0.28	0.11	0.03	Sulphide	Infill
Incl	48.0	52.0	4.0	1.23	0.20	0.02	0.42	0.17	0.04	Sulphide	Infill
JRC391	82.0	120.0	38.0	0.71	0.16	0.01	0.14	0.08	0.01	Sulphide	Infill
Incl	84.0	87.0	3.0	1.63	0.33	0.04	0.18	0.15	0.02	Sulphide	Infill
and	104.0	116.0	12.0	0.91	0.20	0.01	0.17	0.08	0.02	Sulphide	Infill
JRC391	134.0	151.0	17.0	0.73	0.15	<0.01	0.14	0.05	0.01	Sulphide	Infill
Incl	136.0	142.0	6.0	1.21	0.21	<0.01	0.19	0.07	0.02	Sulphide	Infill
JRC391	157.0	189.0	32.0	0.52	0.10	<0.01	0.16	0.09	0.02	Sulphide	Ext
Incl	170.0	174.0	4.0	1.00	0.18	<0.01	0.21	0.06	0.02	Sulphide	Ext
and	180.0	182.0	2.0	0.53	0.14	0.01	0.21	0.19	0.02	Sulphide	Ext
JRC392	68.0	72.0	4.0	1.66	0.22	0.01	0.52	0.44	0.04	Sulphide	Ext
Incl	68.0	71.0	3.0	2.04	0.26	0.01	0.63	0.54	0.05	Sulphide	Ext
JRC393	10.0	28.0	18.0	0.92	0.22	0.02	0.08	0.10	0.01	Oxide	Infill
Incl	11.0	16.0	5.0	1.44	0.19	0.04	0.07	0.13	0.01	Oxide	Infill
and	19.0	21.0	2.0	1.09	0.36	0.02	0.07	0.06	0.02	Oxide	Infill
JRC393	28.0	58.0	30.0	0.62	0.17	0.01	0.16	0.12	0.02	Sulphide	Infill

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
Incl	35.0	45.0	10.0	0.84	0.29	0.02	0.22	0.21	0.03	Sulphide	Infill
and	49.0	51.0	2.0	0.92	0.13	0.01	0.29	0.17	0.03	Sulphide	Infill
JRC393	64.0	76.0	12.0	0.47	0.09	0.01	0.15	0.08	0.02	Sulphide	Infill
JRC393	88.0	136.0	48.0	0.60	0.12	<0.01	0.17	0.07	0.02	Sulphide	Infill
Incl	91.0	93.0	2.0	0.83	0.12	<0.01	0.40	0.17	0.05	Sulphide	Infill
JRC395	86.0	100.0	14.0	0.47	0.09	<0.01	0.17	0.07	0.02	Sulphide	Infill
Incl	96.0	98.0	2.0	0.56	0.12	<0.01	0.21	0.18	0.02	Sulphide	Infill
JRC395	191.0	208.0	17.0	0.58	0.12	0.01	0.13	0.08	0.01	Sulphide	Infill
Incl	198.0	203.0	5.0	0.82	0.16	0.01	0.17	0.14	0.02	Sulphide	Infill
JRC396	14.0	32.0	18.0	0.95	0.18	0.01	0.10	0.14	0.01	Oxide	Infill
Incl	15.0	18.0	3.0	1.69	0.25	0.01	0.08	0.20	0.01	Oxide	Infill
and	23.0	26.0	3.0	1.58	0.41	0.01	0.14	0.18	0.02	Oxide	Infill
JRC396	34.0	60.0	26.0	0.70	0.14	<0.01	0.19	0.10	0.02	Sulphide	Infill
Incl	34.0	38.0	4.0	1.73	0.36	0.01	0.38	0.25	0.04	Sulphide	Infill
and	41.0	43.0	2.0	0.86	0.16	<0.01	0.19	0.14	0.02	Sulphide	Infill
JRC396	69.0	114.0	45.0	0.64	0.12	0.01	0.16	0.08	0.02	Sulphide	Infill
Incl	70.0	74.0	4.0	0.89	0.17	0.01	0.16	0.08	0.02	Sulphide	Infill
and	87.0	90.0	3.0	0.89	0.19	0.01	0.14	0.07	0.01	Sulphide	Infill
and	91.0	95.0	4.0	0.83	0.16	0.01	0.17	0.06	0.02	Sulphide	Infill
and	98.0	100.0	2.0	0.44	0.06	0.01	0.23	0.20	0.03	Sulphide	Infill
JRC397	20.0	32.0	12.0	0.81	0.20	<0.01	0.16	0.16	0.02	Oxide	Infill
Incl	23.0	27.0	4.0	1.01	0.31	0.01	0.18	0.19	0.02	Oxide	Infill
JRC399	9.0	36.0	27.0	0.66	0.24	0.03	0.20	0.19	0.03	Oxide	Infill
JRC399	46.0	85.0	39.0	0.66	0.19	<0.01	0.19	0.09	0.02	Sulphide	Infill
Incl	65.0	67.0	2.0	1.01	0.14	0.01	0.44	0.19	0.04	Sulphide	Infill
and	70.0	72.0	2.0	1.05	0.68	0.01	0.33	0.51	0.02	Sulphide	Infill
JRC399	182.0	186.0	4.0	0.93	0.22	0.02	0.15	0.03	0.01	Sulphide	Ext
Incl	183.0	185.0	2.0	1.08	0.29	0.02	0.14	0.03	0.01	Sulphide	Ext
JRC399	191.0	205.0	14.0	0.99	0.30	0.03	0.14	0.07	0.01	Sulphide	Ext
Incl	192.0	195.0	3.0	1.17	0.74	0.02	0.13	0.07	0.02	Sulphide	Ext
and	201.0	204.0	3.0	2.00	0.40	0.06	0.18	0.11	0.02	Sulphide	Ext
JRC400	131.0	133.0	2.0	0.65	0.16	0.01	0.18	0.17	0.02	Sulphide	Ext
JRC400	212.0	214.0	2.0	1.18	0.48	0.06	0.16	0.11	0.01	Sulphide	Ext
JRC400	219.0	230.0	11.0	0.91	0.41	0.06	0.10	0.10	0.01	Sulphide	Ext
Incl	223.0	225.0	2.0	1.65	0.70	0.08	0.16	0.11	0.01	Sulphide	Ext
and	228.0	230.0	2.0	1.34	0.49	0.06	0.16	0.14	0.02	Sulphide	Ext
JRC402	4.0	27.0	23.0	0.69	0.18	0.02	0.08	0.08	0.03	Oxide	Infill
Incl	10.0	14.0	4.0	1.28	0.38	0.04	0.11	0.14	0.10	Oxide	Infill
JRC402	27.0	33.0	6.0	0.94	0.17	0.01	0.20	0.30	0.02	Sulphide	Infill
JRC403	9.0	26.0	17.0	1.65	0.51	0.02	0.17	0.24	0.07	Oxide	Infill
Incl	10.0	26.0	16.0	1.70	0.49	0.02	0.17	0.25	0.07	Oxide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
JRC403	38.0	59.0	21.0	0.68	0.14	0.01	0.15	0.11	0.02	Sulphide	Infill
Incl	38.0	43.0	5.0	0.96	0.16	0.01	0.18	0.13	0.02	Sulphide	Infill
and	53.0	57.0	4.0	0.92	0.21	<0.01	0.17	0.05	0.02	Sulphide	Infill
JRC403	82.0	93.0	11.0	0.43	0.09	0.01	0.16	0.04	0.02	Sulphide	Infill
JRC403	101.0	125.0	24.0	0.74	0.19	0.13	0.15	0.13	0.02	Sulphide	Ext
Incl	107.0	115.0	8.0	1.40	0.39	0.36	0.16	0.31	0.02	Sulphide	Infill
JRC405	6.0	14.0	8.0	0.66	0.11	0.01	0.04	0.10	0.02	Oxide	Infill
JRC410	6.0	22.0	16.0	1.73	0.62	0.07	0.19	0.26	0.08	Oxide	Infill
Incl	7.0	22.0	15.0	1.81	0.65	0.07	0.20	0.27	0.09	Oxide	Infill
JRC410	22.0	51.0	29.0	0.74	0.14	<0.01	0.16	0.06	0.02	Sulphide	Infill
Incl	22.0	29.0	7.0	1.10	0.22	0.01	0.18	0.09	0.02	Sulphide	Infill
and	41.0	44.0	3.0	1.31	0.23	0.01	0.23	0.14	0.02	Sulphide	Infill
JRC410	103.0	111.0	8.0	0.69	0.15	0.03	0.14	0.07	0.01	Sulphide	Ext
JRC412	14.0	46.0	32.0	1.65	0.63	0.03	0.19	0.15	0.05	Oxide	Infill
Incl	17.0	27.0	10.0	1.65	0.52	0.01	0.19	0.18	0.11	Oxide	Infill
and	31.0	41.0	10.0	3.02	1.33	0.07	0.30	0.22	0.02	Oxide	Infill
JRC412	48.0	70.0	22.0	0.38	0.08	0.02	0.16	0.07	0.01	Sulphide	Infill
JRC412	161.0	165.0	4.0	0.03	<0.01	0.22	0.11	0.30	0.03	Sulphide	Infill
JRC413	9.0	17.0	8.0	2.01	1.00	0.01	0.13	0.21	0.19	Oxide	Infill
Incl	10.0	17.0	7.0	2.19	1.12	0.01	0.14	0.23	0.22	Oxide	Infill
JRC414	9.0	25.0	16.0	1.12	0.26	0.02	0.23	0.16	0.02	Oxide	Infill
Incl	12.0	24.0	12.0	1.29	0.29	0.02	0.24	0.18	0.02	Oxide	Infill
JRC415	6.0	22.0	16.0	1.33	0.50	0.11	0.17	0.27	0.07	Oxide	Infill
Incl	7.0	21.0	14.0	1.41	0.51	0.11	0.18	0.29	0.07	Oxide	Infill
JRC415	22.0	74.0	52.0	0.90	0.19	0.01	0.16	0.07	0.02	Sulphide	Infill
Incl	22.0	26.0	4.0	0.85	0.20	0.04	0.15	0.15	0.02	Sulphide	Infill
and	34.0	54.0	20.0	1.33	0.26	<0.01	0.19	0.08	0.02	Sulphide	Infill
JRC416	8.0	24.0	16.0	1.62	0.57	0.02	0.15	0.18	0.04	Oxide	Infill
Incl	10.0	24.0	14.0	1.77	0.60	0.02	0.17	0.19	0.05	Oxide	Infill
JRC416	24.0	57.0	33.0	0.63	0.13	<0.01	0.15	0.08	0.02	Sulphide	Infill
Incl	41.0	50.0	9.0	0.80	0.18	<0.01	0.19	0.12	0.02	Sulphide	Infill
JRC416	139.0	152.0	13.0	0.75	0.16	0.01	0.16	0.05	0.02	Sulphide	Ext
Incl	139.0	145.0	6.0	0.90	0.19	0.01	0.16	0.05	0.02	Sulphide	Ext
JRC417	9.0	23.0	14.0	0.58	0.21	0.02	0.09	0.14	0.04	Oxide	Infill
JRC417	30.0	66.0	36.0	0.65	0.14	0.01	0.15	0.08	0.02	Sulphide	Infill
Incl	38.0	49.0	11.0	0.76	0.18	0.01	0.16	0.11	0.02	Sulphide	Infill
JRC418	9.0	29.0	20.0	0.74	0.17	0.05	0.14	0.18	0.02	Oxide	Infill
Incl	16.0	19.0	3.0	1.04	0.25	0.04	0.19	0.26	0.05	Oxide	Infill
JRC418	29.0	60.0	31.0	0.69	0.16	0.04	0.12	0.13	0.01	Sulphide	Infill
Incl	41.0	53.0	12.0	0.76	0.17	0.08	0.13	0.17	0.01	Sulphide	Infill
JRC419	87.0	200.0	113.0	0.70	0.14	0.02	0.16	0.09	0.02	Sulphide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
Incl	127.0	140.0	13.0	1.08	0.22	0.01	0.17	0.10	0.02	Sulphide	Infill
and	143.0	146.0	3.0	1.05	0.26	0.01	0.19	0.09	0.02	Sulphide	Infill
and	164.0	173.0	9.0	0.70	0.12	0.01	0.27	0.15	0.04	Sulphide	Infill
and	195.0	197.0	2.0	1.09	0.32	0.05	0.26	0.11	0.02	Sulphide	Ext
JRC420	63.0	74.0	11.0	0.75	0.19	0.01	0.16	0.12	0.02	Sulphide	Infill
Incl	67.0	74.0	7.0	0.89	0.22	0.01	0.16	0.13	0.02	Sulphide	Infill
JRC420	102.0	246.0	144.0	0.61	0.14	0.01	0.15	0.09	0.01	Sulphide	Infill
Incl	121.0	123.0	2.0	0.95	0.19	0.01	0.14	0.11	0.01	Sulphide	Infill
and	133.0	137.0	4.0	0.74	0.17	0.02	0.14	0.17	0.01	Sulphide	Infill
and	162.0	166.0	4.0	0.62	0.12	<0.01	0.18	0.18	0.02	Sulphide	Infill
and	168.0	174.0	6.0	0.83	0.16	0.01	0.15	0.12	0.01	Sulphide	Infill
and	236.0	239.0	3.0	1.54	0.36	0.05	0.20	0.09	0.02	Sulphide	Ext
JRC421	11.0	37.0	26.0	1.30	0.37	0.04	0.15	0.15	0.03	Oxide	Infill
Incl	11.0	30.0	19.0	1.55	0.45	0.03	0.14	0.17	0.04	Oxide	Infill
JRC421	46.0	147.0	101.0	0.76	0.16	0.04	0.15	0.08	0.01	Sulphide	Infill
Incl	60.0	68.0	8.0	1.70	0.26	0.05	0.16	0.11	0.01	Sulphide	Infill
and	71.0	76.0	5.0	0.98	0.11	0.07	0.18	0.16	0.02	Sulphide	Infill
and	88.0	93.0	5.0	1.30	0.11	0.06	0.18	0.15	0.02	Sulphide	Infill
and	125.0	131.0	6.0	1.46	0.50	0.02	0.17	0.05	0.01	Sulphide	Infill
JRC422	25.0	36.0	11.0	0.67	0.18	0.01	0.14	0.15	0.02	Oxide	Infill
JRC422	47.0	57.0	10.0	0.54	0.13	0.01	0.12	0.09	0.01	Sulphide	Infill
JRC422	68.0	140.0	72.0	0.78	0.19	0.01	0.17	0.14	0.02	Sulphide	Infill
Incl	68.0	88.0	20.0	1.22	0.35	0.01	0.20	0.26	0.02	Sulphide	Infill
and	92.0	99.0	7.0	0.86	0.17	0.01	0.17	0.14	0.01	Sulphide	Infill
and	122.0	129.0	7.0	0.85	0.16	0.01	0.24	0.15	0.02	Sulphide	Infill
JRC423	37.0	53.0	16.0	0.43	0.12	0.01	0.13	0.12	0.02	Sulphide	Infill
JRC423	58.0	176.0	118.0	0.71	0.15	0.02	0.14	0.11	0.01	Sulphide	Infill
Incl	74.0	76.0	2.0	0.98	0.24	0.02	0.13	0.06	0.01	Sulphide	Infill
and	79.0	93.0	14.0	0.92	0.20	0.04	0.13	0.13	0.01	Sulphide	Infill
and	97.0	103.0	6.0	0.81	0.17	0.03	0.14	0.13	0.01	Sulphide	Infill
and	106.0	128.0	22.0	0.85	0.19	0.03	0.15	0.14	0.01	Sulphide	Infill
and	132.0	137.0	5.0	0.91	0.17	0.01	0.16	0.09	0.01	Sulphide	Infill
and	155.0	160.0	5.0	1.15	0.19	0.01	0.22	0.17	0.02	Sulphide	Infill
JRC423	181.0	192.0	11.0	0.49	0.11	<0.01	0.13	0.07	0.02	Sulphide	Ext
JRC423	217.0	235.0	18.0	1.15	0.28	0.01	0.23	0.17	0.02	Sulphide	Ext
Incl	223.0	231.0	8.0	1.98	0.49	0.02	0.32	0.31	0.03	Sulphide	Ext
JRC423	241.0	249.0	8.0	0.69	0.12	0.01	0.19	0.09	0.02	Sulphide	Ext
Incl	245.0	249.0	4.0	0.70	0.12	0.01	0.20	0.15	0.02	Sulphide	Ext
JRC423	276.0	280.0	4.0	0.71	0.13	0.10	0.13	0.06	0.01	Sulphide	Ext
JRC424	10.0	26.0	16.0	0.73	0.23	0.03	0.10	0.17	0.03	Oxide	Infill
Incl	12.0	16.0	4.0	0.95	0.27	0.02	0.09	0.26	0.03	Oxide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
JRC424	26.0	35.0	9.0	0.42	0.10	0.01	0.11	0.10	0.01	Sulphide	Infill
JRC424	53.0	139.0	86.0	0.62	0.14	0.01	0.14	0.07	0.01	Sulphide	Infill
Incl	56.0	58.0	2.0	1.03	0.24	0.02	0.13	0.08	0.01	Sulphide	Infill
and	61.0	65.0	4.0	0.85	0.19	0.02	0.14	0.13	0.01	Sulphide	Infill
and	71.0	75.0	4.0	0.85	0.21	0.02	0.14	0.11	0.01	Sulphide	Infill
and	106.0	110.0	4.0	0.79	0.19	0.12	0.17	0.16	0.02	Sulphide	Infill
and	113.0	115.0	2.0	1.83	0.37	0.01	0.17	0.09	0.02	Sulphide	Infill
JRC424	156.0	167.0	11.0	0.49	0.10	<0.01	0.15	0.04	0.01	Sulphide	Ext
JRC424	234.0	238.0	4.0	0.61	0.19	0.03	0.11	0.02	0.01	Sulphide	Ext
JRC425	14.0	19.0	5.0	1.02	0.19	0.01	0.12	0.07	0.01	Oxide	Infill
Incl	14.0	18.0	4.0	1.08	0.20	0.02	0.12	0.08	0.01	Oxide	Infill
JRC425	21.0	54.0	33.0	0.63	0.12	<0.01	0.17	0.05	0.01	Sulphide	Infill
Incl	26.0	31.0	5.0	0.90	0.16	<0.01	0.21	0.05	0.02	Sulphide	Infill
JRC425	112.0	123.0	11.0	0.93	0.21	<0.01	0.16	0.07	0.02	Sulphide	Infill
Incl	112.0	116.0	4.0	1.67	0.40	<0.01	0.26	0.12	0.02	Sulphide	Infill
JRC425	138.0	150.0	12.0	0.94	0.21	0.01	0.15	0.07	0.01	Sulphide	Infill
Incl	144.0	148.0	4.0	1.78	0.44	0.01	0.19	0.07	0.02	Sulphide	Infill
JRC425	192.0	281.0	89.0	0.54	0.12	0.02	0.13	0.06	0.01	Sulphide	Ext
Incl	260.0	262.0	2.0	1.41	0.24	0.04	0.25	0.22	0.02	Sulphide	Ext
JRC427	29.0	47.0	18.0	0.50	0.12	0.03	0.11	0.12	0.01	Sulphide	Infill
Incl	38.0	41.0	3.0	0.49	0.11	0.14	0.13	0.44	0.02	Sulphide	Infill
JRC427	74.0	102.0	28.0	0.67	0.13	0.01	0.16	0.09	0.02	Sulphide	Infill
Incl	74.0	86.0	12.0	0.93	0.18	0.01	0.14	0.10	0.02	Sulphide	Infill
and	89.0	91.0	2.0	0.46	0.11	0.01	0.22	0.20	0.03	Sulphide	Infill
JRC427	123.0	127.0	4.0	1.83	0.44	<0.01	0.37	0.13	0.03	Sulphide	Infill
JRC427	168.0	177.0	9.0	1.45	0.14	<0.01	0.25	0.07	0.02	Sulphide	Infill
Incl	168.0	173.0	5.0	2.11	0.17	<0.01	0.29	0.11	0.03	Sulphide	Infill
JRC427	205.0	209.0	4.0	0.56	0.11	<0.01	0.19	0.01	0.02	Sulphide	Infill
JRC427	235.0	261.0	26.0	0.75	0.15	0.01	0.15	0.07	0.02	Sulphide	Infill
Incl	252.0	260.0	8.0	1.01	0.26	0.01	0.17	0.09	0.02	Sulphide	Infill
JRC427	266.0	271.0	5.0	0.62	0.12	0.01	0.14	0.06	0.01	Sulphide	Ext
JRC428	68.0	71.0	3.0	0.98	0.17	0.01	0.15	0.13	0.02	Sulphide	Infill
JRC428	157.0	162.0	5.0	0.56	0.11	<0.01	0.18	0.03	0.01	Sulphide	Infill
JRC430	11.0	17.0	6.0	0.63	0.06	0.01	0.03	0.04	<0.01	Oxide	Ext
JRC431	164.0	176.0	12.0	1.23	0.26	<0.01	0.27	0.07	0.02	Sulphide	Infill
Incl	171.0	176.0	5.0	2.31	0.47	<0.01	0.47	0.07	0.04	Sulphide	Infill
JRC431	225.0	229.0	4.0	0.79	0.57	0.01	0.13	0.31	0.01	Sulphide	Infill
Incl	226.0	229.0	3.0	0.89	0.60	0.01	0.15	0.34	0.01	Sulphide	Infill
JRC432	8.0	14.0	6.0	0.73	0.16	0.02	0.04	0.07	0.07	Oxide	Ext
Incl	12.0	14.0	2.0	1.12	0.28	0.04	0.05	0.07	0.10	Oxide	Ext
JRC433	15.0	39.0	24.0	0.83	0.18	0.02	0.16	0.11	0.02	Oxide	Infill

Hole ID	From (m)	To (m)	Interval (m)	Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	Geology	Type
Incl	19.0	29.0	10.0	1.19	0.26	0.03	0.18	0.16	0.02	Oxide	Infill
JRC433	50.0	123.0	73.0	0.61	0.13	<0.01	0.17	0.06	0.02	Sulphide	Infill
Incl	59.0	63.0	4.0	0.74	0.16	0.01	0.27	0.18	0.03	Sulphide	Infill
and	69.0	77.0	8.0	1.06	0.23	<0.01	0.19	0.09	0.02	Sulphide	Infill
and	86.0	88.0	2.0	1.13	0.19	0.01	0.17	0.12	0.02	Sulphide	Infill
JRC433	149.0	175.0	26.0	0.52	0.11	<0.01	0.16	0.06	0.02	Sulphide	Infill
JRC433	180.0	207.0	27.0	0.61	0.12	<0.01	0.17	0.04	0.02	Sulphide	Infill
Incl	185.0	188.0	3.0	1.00	0.18	<0.01	0.23	0.04	0.02	Sulphide	Infill
JRC433	214.0	225.0	11.0	0.48	0.12	<0.01	0.15	0.03	0.01	Sulphide	Infill
JRC433	230.0	261.0	31.0	1.10	0.19	0.02	0.15	0.07	0.02	Sulphide	Infill
Incl	240.0	254.0	14.0	0.87	0.15	0.01	0.17	0.08	0.02	Sulphide	Infill
and	257.0	260.0	3.0	4.47	0.76	0.09	0.16	0.08	0.02	Sulphide	Infill
JRC433	277.0	320.0	43.0	0.78	0.15	0.03	0.13	0.11	0.01	Sulphide	Infill
Incl	295.0	298.0	3.0	1.21	0.25	0.05	0.09	0.33	0.01	Sulphide	Infill
and	301.0	303.0	2.0	2.48	0.13	0.10	0.13	0.21	0.02	Sulphide	Infill
and	309.0	315.0	6.0	1.60	0.30	0.05	0.20	0.16	0.02	Sulphide	Infill
JRC434	79.0	85.0	6.0	0.38	0.10	0.01	0.16	0.07	0.02	Sulphide	Infill
JRC434	102.0	108.0	6.0	0.49	0.12	0.01	0.12	0.09	0.01	Sulphide	Infill
JRC434	127.0	151.0	24.0	0.66	0.16	0.01	0.11	0.09	0.01	Sulphide	Infill
Incl	136.0	138.0	2.0	1.26	0.35	0.01	0.15	0.10	0.02	Sulphide	Infill
and	149.0	151.0	2.0	0.93	0.23	0.01	0.13	0.13	0.01	Sulphide	Infill
JRC434	159.0	180.0	21.0	0.78	0.16	0.01	0.13	0.08	0.01	Sulphide	Infill
Incl	159.0	166.0	7.0	0.91	0.20	<0.01	0.16	0.11	0.02	Sulphide	Infill
and	178.0	180.0	2.0	0.91	0.18	0.01	0.16	0.10	0.02	Sulphide	Infill
JRC434	236.0	241.0	5.0	0.63	0.11	<0.01	0.17	0.03	0.01	Sulphide	Infill
JRC434	247.0	260.0	13.0	0.66	0.14	<0.01	0.16	0.07	0.02	Sulphide	Infill
JRC434	272.0	285.0	13.0	0.47	0.13	<0.01	0.16	0.06	0.02	Sulphide	Infill
JRC434	290.0	321.0	31.0	2.11	0.62	0.03	0.54	0.34	0.04	Sulphide	Infill
Incl	301.0	316.0	15.0	3.86	1.17	0.04	0.95	0.63	0.06	Sulphide	Infill
JRC435	21.0	25.0	4.0	0.66	0.24	0.09	0.14	0.13	0.03	Oxide	Infill
JRC435	33.0	37.0	4.0	0.59	0.15	0.02	0.12	0.13	0.01	Oxide	Infill
JRC435	37.0	52.0	15.0	0.58	0.15	0.01	0.11	0.10	0.01	Sulphide	Infill
Incl	41.0	44.0	3.0	0.76	0.18	0.02	0.14	0.15	0.02	Sulphide	Infill
JRC435	56.0	65.0	9.0	0.69	0.15	0.01	0.16	0.06	0.02	Sulphide	Infill
Incl	61.0	63.0	2.0	0.94	0.17	0.02	0.16	0.04	0.01	Sulphide	Infill

Ext = Intersection outside Resource pit shell. Infill = Intersection within Resource pit shell

Table 2. New drill hole survey data and assaying status.

Hole ID	Type	Easting (m)	Northing (m)	RL (m)	Depth (m)	Survey type	Azi (°)	Dip (°)	Assay status
JD133	Core	424807.1	6512430.7	240.2	390.7	GPS-RTK	93.1	-59.7	Reported
JD134	Core	424811.7	6512476.8	242.0	456.7	GPS-RTK	91.7	-58.3	Reported
JD135	Core	425643.8	6513073.8	248.9	207.4	GPS-RTK	89.5	-59.1	Reported
JD136	Core	425640.1	6512999.8	249.4	243.4	GPS-RTK	89.7	-59.9	Reported
JD137	Core	424772.8	6512428.2	239.8	651.5	GPS-RTK	91.5	-59.7	Reported
JD138	Core	425631.2	6512917.7	249.2	222.4	GPS-RTK	89.4	-59.0	Reported
JD139	Core	425631.3	6512962.6	250.1	249.3	GPS-RTK	91.8	-59.3	Reported
JD140	Core	425556.7	6512962.4	254.9	300.4	GPS-RTK	89.9	-59.2	Reported
JD141	Core	424942.4	6512559.1	244.2	362.8	GPS-RTK	90.0	-59.6	Reported
JD142	Core	424753.2	6512510.0	243.4	642.0	GPS-RTK	90.0	-60.0	Reported
JD143	Core	425593.1	6512967.2	253.3	279.4	GPS-RTK	91.0	-66.2	Reported
JD144	Core	425629.0	6513034.3	249.8	249.4	GPS-RTK	89.1	-59.4	Reported
JD145	Core	424816.9	6512551.3	246.0	447.8	GPS-RTK	89.5	-59.7	Reported
JD146	Core	425637.8	6513115.6	248.8	204.4	GPS-RTK	89.3	-60.0	Reported
JD147	Core	425669.8	6513089.8	247.4	180.4	GPS-RTK	90.0	-60.0	Reported
JD148	Core	425719.0	6513083.7	247.1	120.4	GPS-RTK	89.6	-58.4	Reported - NSA
JD149	Core	425759.1	6513080.3	246.6	120.5	GPS-RTK	90.6	-60.1	Reported - NSA
JD150	Core	424938.8	6512470.2	239.8	345.5	GPS-RTK	87.2	-60.3	Reported
JD151	Core	425755.6	6512989.6	246.3	144.4	GPS-RTK	91.0	-60.5	Reported - NSA
JD152	Core	425707.0	6513008.0	247.0	150.3	GPS-RTK	93.7	-58.9	Reported - NSA
JD153	Core	425675.8	6512998.6	247.5	177.4	GPS-RTK	96.6	-55.3	Reported
JD154	Core	425806.6	6513076.7	245.3	120.5	GPS-RTK	91.9	-60.2	Reported - NSA
JD155	Core	425799.7	6512993.3	245.4	120.5	GPS-RTK	89.1	-60.1	Reported - NSA
JD156	Core	424811.6	6512505.6	243.4	450.3	GPS-RTK	93.4	-60.2	Reported
JD157	Core	424705.4	6512797.2	254.5	776.5	GPS-RTK	89.2	-62.4	Reported
JD158	Core	424936.7	6512427.3	237.8	270.6	GPS-RTK	127.4	-59.7	Reported
JD159	Core	424848.2	6512520.6	243.1	381.7	GPS-RTK	89.1	-62.0	Reported
JD160	Core	425667.8	6512922.1	247.3	174.3	GPS-RTK	89.4	-60.0	Reported
JD161	Core	425580.0	6512821.2	249.2	248.4	GPS-RTK	89.4	-60.5	Reported
JD162	Core	424936.5	6512395.7	236.4	489.2	GPS-RTK	87.6	-60.7	Reported
JD163	Core	425710.7	6512921.1	246.3	147.4	GPS-RTK	89.8	-60.4	Reported
JD164	Core	425755.1	6512919.8	245.5	120.4	GPS-RTK	90.9	-60.4	Reported - NSA
JD165	Core	425802.9	6512920.4	245.5	120.4	GPS-RTK	90.9	-60.4	Reported - NSA
JD166	Core	425086.4	6513519.5	263.2	339.6	GPS-RTK	87.6	-61.0	Reported
JD167	Core	425566.5	6513198.5	248.6	240.9	GPS-RTK	88.2	-60.3	Reported
JD168	Core	424883.2	6512504.2	241.2	367.8	GPS-RTK	95.5	-60.2	Reported
JD169	Core	425785.8	6512858.8	245.6	171.4	GPS-RTK	90.8	-60.0	Reported
JD170	Core	424872.9	6512399.6	238.0	352.0	GPS-RTK	89.7	-56.5	Reported
JD171	Core	425665.1	6512819.5	247.5	222.4	GPS-RTK	90.2	-60.7	Reported

For personal use only

Hole ID	Type	Easting (m)	Northing (m)	RL (m)	Depth (m)	Survey type	Azi (°)	Dip (°)	Assay status
JD172	Core	425221.9	6513079.2	262.1	577.0	GPS-RTK	90.6	-56.7	Reported
JD173	Core	425683.7	6512784.5	247.9	147.4	GPS-RTK	119.6	-66.7	Reported
JD174	Core	425680.9	6512851.0	246.9	180.0	GPS-RTK	91.0	-60.3	Reported
JD175	Core	425707.0	6512864.2	246.4	168.4	GPS-RTK	86.6	-60.6	Reported
JD176	Core	424863.0	6512472.6	240.4	435.2	GPS-RTK	87.2	-60.1	Reported
JD177	Core	425675.9	6513115.8	247.2	144.4	GPS-RTK	89.8	-60.5	Reported
JD178	Core	425713.4	6513111.1	247.2	135.4	GPS-RTK	85.1	-60.4	Reported
JD179	Core	425080.0	6513031.7	266.0	300.9	GPS-RTK	88.9	-60.2	Reported
JD180	Core	424979.5	6512276.2	233.9	236.3	GPS-RTK	92.1	-60.2	Reported
JD181	Core	424861.5	6512320.9	235.0	577.3	GPS-RTK	92.5	-69.5	Reported
JD211	Core	424800.0	6513585.0	273.6	273.4	GPS-RTK	90.4	-60.7	Reported
JRC028D	RC-Core	425298.8	6512517.6	241.8	354.8	GPS-RTK	93.1	-59.3	RC previously reported
JRC087D	RC-Core	425257.1	6512507.7	241.9	357.8	GPS-RTK	94.1	-58.6	RC previously reported
JRC109D	RC-Core	425318.3	6512706.4	249.3	384.8	GPS-RTK	89.2	-60.5	RC previously reported
JRC115D	RC-Core	425396.5	6512701.7	250.9	319.0	GPS-RTK	89.3	-60.8	RC previously reported
JRC209D	RC-Core	425257.9	6512562.4	244.1	350.0	GPS-RTK	93.3	-59.7	RC previously reported
JRC272D	RC-Core	425327.2	6512997.5	262.6	471.7	GPS-RTK	91.0	-60.1	RC previously reported
JRC274D	RC-Core	424982.7	6512652.6	248.5	606.6	GPS-RTK	90.0	-60.3	RC previously reported
JRC345D	RC-Core	425407.8	6512998.2	260.2	390.7	GPS-RTK	88.8	-60.4	RC previously reported
JRC366	RC	425209.5	6513439.9	259.8	177.0	GPS-RTK	89.3	-60.3	Previously reported
JRC367	RC	425131.2	6513441.6	263.3	249.0	GPS-RTK	90.8	-60.4	Previously reported
JRC368	RC	425064.4	6513438.8	267.5	255.0	GPS-RTK	89.7	-63.4	Reported
JRC369	RC	425043.0	6513590.6	264.7	252.0	GPS-RTK	93.0	-60.7	Reported - NSA
JRC370	RC	424982.1	6513444.2	270.3	249.0	GPS-RTK	89.6	-63.6	Reported - NSA
JRC371	RC	425007.4	6513591.4	266.6	267.0	GPS-RTK	91.9	-60.3	Reported - NSA
JRC372	RC	425513.7	6512959.1	255.4	320.0	GPS-RTK	91.6	-60.5	Reported
JRC373	RC	424964.2	6513592.4	268.9	307.0	GPS-RTK	89.8	-60.2	Reported - NSA
JRC374	RC	425474.0	6512958.1	256.9	273.0	GPS-RTK	92.5	-60.1	Reported
JRC375	RC	425679.4	6513601.9	248.2	153.0	GPS-RTK	90.5	-60.2	Reported - NSA
JRC376	RC	425433.2	6512957.2	259.5	225.0	GPS-RTK	92.7	-60.8	Reported
JRC377	RC	425397.9	6512955.9	261.0	213.0	GPS-RTK	91.3	-60.6	Reported
JRC378	RC	425755.7	6513602.2	247.9	150.0	GPS-RTK	91.5	-60.4	Reported - NSA
JRC379	RC	425836.2	6513606.0	247.8	153.0	GPS-RTK	90.2	-59.9	Reported - NSA
JRC380	RC	425315.9	6512955.2	263.1	336.0	GPS-RTK	93.2	-59.8	Reported
JRC381	RC	425758.6	6512597.4	243.3	120.0	GPS-RTK	88.6	-60.1	Reported
JRC382	RC	425797.8	6512598.5	243.8	120.0	GPS-RTK	91.8	-59.7	Reported
JRC383	RC	425351.8	6512958.2	262.6	303.0	GPS-RTK	94.3	-59.9	Reported
JRC384	RC	425758.5	6512560.1	243.0	120.0	GPS-RTK	89.9	-59.9	Reported
JRC385	RC	425797.2	6512559.6	242.9	120.0	GPS-RTK	89.8	-60.0	Reported - NSA
JRC386	RC	425915.7	6513607.9	247.0	150.0	GPS-RTK	90.1	-60.2	Reported - NSA
JRC387	RC	425990.9	6513609.5	245.6	150.0	GPS-RTK	87.8	-61.1	Reported - NSA

Hole ID	Type	Easting (m)	Northing (m)	RL (m)	Depth (m)	Survey type	Azi (°)	Dip (°)	Assay status
JRC388	RC	425524.0	6513035.3	254.9	315.0	GPS-RTK	91.8	-60.5	Reported
JRC389	RC	425452.4	6513553.9	251.2	300.0	GPS-RTK	88.1	-59.7	Reported
JRC390	RC	424924.5	6513593.0	269.5	246.0	GPS-RTK	91.8	-59.7	Reported
JRC391	RC	425490.6	6513553.6	250.3	250.0	GPS-RTK	89.6	-59.6	Reported
JRC392	RC	424869.5	6513597.5	272.1	252.0	GPS-RTK	89.7	-57.5	Reported
JRC393	RC	425533.2	6513555.0	249.0	207.0	GPS-RTK	89.5	-59.7	Reported
JRC394	RC	424903.0	6513437.6	269.6	204.0	GPS-RTK	88.0	-59.8	Reported
JRC395	RC	425482.5	6513034.3	256.4	321.0	GPS-RTK	91.4	-60.4	Reported
JRC396	RC	425563.7	6513556.7	248.3	150.0	GPS-RTK	90.5	-59.9	Reported
JRC397	RC	425607.9	6513558.1	247.9	150.0	GPS-RTK	88.8	-59.3	Reported
JRC398	RC	424890.3	6513376.3	268.4	180.0	GPS-RTK	86.6	-60.5	Reported
JRC399	RC	425533.4	6513198.9	250.1	279.0	GPS-RTK	91.2	-60.1	Reported
JRC400	RC	424928.9	6513318.7	267.7	250.0	GPS-RTK	89.0	-60.2	Reported
JRC401	RC	425843.1	6513110.9	244.0	126.0	GPS-RTK	91.3	-59.9	Reported - NSA
JRC402	RC	425566.5	6513198.5	248.6	39.0	GPS-RTK	90.0	-60.0	Reported
JRC403	RC	425607.7	6513195.1	248.1	233.0	GPS-RTK	89.6	-59.3	Reported
JRC404	RC	425881.4	6513111.9	242.5	120.0	GPS-RTK	89.2	-60.0	Reported - NSA
JRC405	RC	425686.8	6513193.5	247.4	152.0	GPS-RTK	90.8	-59.2	Reported
JRC406	RC	425920.9	6513107.5	241.1	120.0	GPS-RTK	93.5	-59.5	Reported - NSA
JRC407	RC	425958.0	6513109.1	239.0	120.0	GPS-RTK	94.8	-60.1	Reported - NSA
JRC408	RC	425650.7	6513196.7	247.4	213.0	GPS-RTK	92.9	-60.2	Reported - NSA
JRC409	RC	425999.8	6513114.6	238.4	250.0	GPS-RTK	88.0	-59.6	Reported - NSA
JRC410	RC	425604.8	6513350.1	246.1	198.0	GPS-RTK	90.4	-60.6	Reported
JRC411	RC	425726.8	6513189.7	248.1	153.0	GPS-RTK	90.9	-59.5	Reported - NSA
JRC412	RC	425578.7	6512739.6	249.0	297.0	GPS-RTK	88.5	-59.8	Reported
JRC413	RC	425578.5	6512651.8	246.5	17.0	GPS-RTK	90.0	-60.0	Reported
JRC414	RC	425609.6	6513278.4	246.0	45.0	GPS-RTK	95.4	-59.6	Reported
JRC415	RC	425565.9	6513350.4	246.4	150.0	GPS-RTK	90.2	-59.8	Reported
JRC416	RC	425571.0	6513279.0	246.9	250.0	GPS-RTK	89.4	-59.7	Reported
JRC417	RC	425526.9	6513276.8	247.9	69.0	GPS-RTK	90.0	-60.0	Reported
JRC418	RC	425528.8	6513352.6	247.0	60.0	GPS-RTK	91.7	-60.0	Reported
JRC419	RC	425490.9	6513480.3	249.0	282.0	GPS-RTK	91.9	-59.1	Reported
JRC420	RC	425452.7	6513475.5	249.7	318.0	GPS-RTK	86.0	-60.2	Reported
JRC421	RC	425584.9	6512655.1	246.1	257.0	GPS-RTK	92.6	-59.6	Reported
JRC422	RC	425538.4	6513478.6	247.7	222.0	GPS-RTK	87.9	-60.5	Reported
JRC423	RC	425448.7	6513276.5	250.9	330.0	GPS-RTK	94.6	-59.6	Reported
JRC424	RC	425485.3	6513275.5	249.2	300.0	GPS-RTK	86.8	-59.9	Reported
JRC425	RC	425519.3	6513112.8	253.2	300.0	GPS-RTK	91.3	-60.7	Reported
JRC426	RC	425921.1	6512858.8	243.4	120.0	GPS-RTK	92.5	-60.3	Reported - NSA
JRC427	RC	425396.0	6513113.0	258.2	288.0	GPS-RTK	90.8	-60.5	Reported
JRC428	RC	425357.2	6513112.3	260.0	204.0	GPS-RTK	92.4	-60.2	Reported

Hole ID	Type	Easting (m)	Northing (m)	RL (m)	Depth (m)	Survey type	Azi (°)	Dip (°)	Assay status
JRC429	RC	425998.2	6512859.7	240.5	120.0	GPS-RTK	95.8	-60.2	Reported - NSA
JRC430	RC	425882.6	6512565.3	242.6	120.0	GPS-RTK	85.4	-60.2	Reported
JRC431	RC	425318.0	6513110.7	260.7	240.0	GPS-RTK	90.4	-59.5	Reported
JRC432	RC	425840.4	6512572.0	243.4	120.0	GPS-RTK	101.7	-60.4	Reported
JRC433	RC	425404.1	6513030.7	260.0	327.0	GPS-RTK	91.1	-61.9	Reported
JRC434	RC	425239.6	6513111.1	261.5	323.0	GPS-RTK	87.2	-60.1	Reported
JRC435	RC	425361.5	6513040.9	261.1	183.0	GPS-RTK	87.8	-59.6	Reported

NSA = No significant assay

Metal equivalents

Sulphide drill intersections are quoted using a nickel equivalent (NiEq) cut-off grade. No metal equivalent is used for the oxide domain.

Based on limited metallurgical testwork completed to date for the sulphide domain, it is the Company's opinion that all the quoted elements included in metal equivalent calculations (palladium, platinum, gold, nickel, copper and cobalt) have a reasonable potential of being recovered and sold.

Metal equivalents for the sulphide domains are calculated according to the formula below:

$$\text{NiEq (\%)} = \text{Ni (\%)} + 0.37 \times \text{Pd (g/t)} + 0.24 \times \text{Pt (g/t)} + 0.25 \times \text{Au (g/t)} + 0.65 \times \text{Cu (\%)} + 3.24 \times \text{Co (\%)};$$

Metal recoveries used in the metal equivalent calculations are at the lower end of the range for all metals in the sulphide domain based on limited metallurgical testwork (refer to ASX Announcement on 28 September 2021). Metal recoveries used in the metal equivalent calculations are listed below:

$$\text{Pd} - 75\%, \text{Pt} - 65\%, \text{Au} - 50\%, \text{Ni} - 60\%, \text{Cu} - 80\%, \text{Co} - 60\%.$$

Metal prices used are:

$$\text{Pd} - \text{US\$1,700/oz},$$

$$\text{Pt} - \text{US\$1,300/oz},$$

$$\text{Au} - \text{US\$1,700/oz},$$

$$\text{Ni} - \text{US\$18,500/t},$$

$$\text{Cu} - \text{US\$9,000/t},$$

$$\text{Co} - \text{US\$60,000/t}.$$

Appendix B Resource Table

Table 3. Gonneville Maiden Mineral Resource Estimate (JORC Code 2012), 9 November 2021.

Domain	Cut-off Grade	Category	Mass (Mt)	Grade								Contained Metal							
				Pd (g/t)	Pt (g/t)	Au (g/t)	Ni (%)	Cu (%)	Co (%)	NiEq (%)	PdEq (g/t)	Pd (Moz)	Pt (Moz)	Au (Moz)	Ni (kt)	Cu (kt)	Co (kt)	NiEq (kt)	PdEq (Moz)
Oxide	0.9g/t Pd	Indicated																	
		Inferred	8.8	1.8	0.06					1.9	0.51	0.02						0.52	
		Subtotal	8.8	1.8	0.06					1.9	0.51	0.02						0.52	
Sulphide (Transitional)	0.4% NiEq	Indicated	7.7	0.68	0.16	0.03	0.18	0.11	0.019	0.60	1.6	0.17	0.04	0.01	14	8.1	1.5	46	0.40
		Inferred	8.0	0.97	0.25	0.03	0.17	0.14	0.029	0.79	2.1	0.25	0.06	0.01	14	11	2.3	63	0.55
		Subtotal	16	0.83	0.20	0.03	0.18	0.12	0.024	0.70	1.9	0.42	0.10	0.02	27	19	3.8	110	0.95
Sulphide (Fresh)	0.4% NiEq	Indicated	150	0.74	0.18	0.03	0.16	0.10	0.016	0.61	1.6	3.5	0.82	0.14	240	150	23	890	7.7
		Inferred	160	0.69	0.16	0.02	0.16	0.10	0.016	0.58	1.6	3.6	0.82	0.12	270	160	26	940	8.2
		Subtotal	310	0.72	0.17	0.03	0.16	0.10	0.016	0.59	1.6	7.1	1.6	0.26	510	310	49	1,800	16
All		Indicated	150	0.74	0.17	0.03	0.17	0.10	0.016	0.61	1.6	3.7	0.86	0.15	250	160	25	930	8.1
		Inferred	180	0.76	0.15	0.03	0.16	0.09	0.016	0.56	1.6	4.4	0.89	0.15	280	170	28	1,000	9.3
		Total	330	0.75	0.16	0.03	0.16	0.10	0.016	0.58	1.6	8.1	1.7	0.30	530	330	53	1,900	17

Note some numerical differences may occur due to rounding to 2 significant figures.

NiEq (%) = Ni (%) + 0.37 x Pd (g/t) + 0.24 x Pt (g/t) + 0.25 x Au (g/t) + 0.65 x Cu (%) + 3.24 x Co (%).

PdEq (g/t) = Pd (g/t) + 0.66 x Pt (g/t) + 0.67 x Au (g/t) + 2.71 x Ni (%) + 1.76 x Cu (%) + 8.78 x Co (%).

Includes drill holes drilled up to and including 31 July 2021.

Appendix C JORC Table 1

C-1 Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (eg. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	<ul style="list-style-type: none"> HQ core was quarter cored and NQ2 was half cored with samples taken over selective intervals ranging from 0.2m to 1.2m (typically 1.0m). Reverse Circulation (RC) drilling samples were collected as 1m samples.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	<ul style="list-style-type: none"> Qualitative care taken when sampling diamond drill core to sample the same half of the drill core. For RC, two 1m assay samples were collected as a split from the rig cyclone using a cone splitter with the same split consistently sent to the laboratory for analysis.
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg. submarine nodules) may warrant disclosure of detailed information.	<ul style="list-style-type: none"> Mineralisation is easily recognised by the presence of sulphides. In diamond core sample intervals were selected on a qualitative assessment of sulphide content
Drilling techniques	Drill type (eg. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	<ul style="list-style-type: none"> Drilling has been undertaken by diamond, Reverse Circulation (RC) techniques. Diamond drill core is predominantly HQ size (63.5mm diameter). Limited NQ2 (47.6mm diameter) drilling has also been completed. Triple tube has been used from surface until competent bedrock and then standard tube thereafter. Core orientation is by an ACT Reflex (ACT II RD) tool RC Drilling uses a face-sampling hammer drill bit with a diameter of 5.5 inches (140mm).
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	<ul style="list-style-type: none"> Individual recoveries of diamond drill core samples were assessed quantitatively by comparing measured core length with expected core length from drillers mark. Generally core recovery was excellent in fresh rock

		<p>and approaching 100%. Core recovery in oxide material is often poor due to sample washing out. Core recovery in the oxide zone averages 60%</p> <ul style="list-style-type: none"> Individual recoveries for RC composite samples were recorded on a qualitative basis. Sample weights were observed to be slightly lower through transported cover whereas drilling through bedrock yielded samples with more consistent weights. Two separate studies were completed where all the sample was weighed and compared with the expected weight. These indicated that as with the diamond core, sample recovery in the oxide is moderate and good in the fresh rock.
	<p>Measures taken to maximise sample recovery and ensure representative nature of the samples.</p>	<ul style="list-style-type: none"> With diamond drilling triple tube coring in the oxide zone is undertaken to improve sample recovery. This results in better recoveries but recovery is still only moderate to good. Diamond core samples were consistently taken from the same side of the core and RC samples were consistently taken from the same split on the cyclone.
	<p>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</p>	<ul style="list-style-type: none"> There is no evidence of a sample recovery and grade relationship in unweathered material.
Logging	<p>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</p>	<ul style="list-style-type: none"> All drill holes were logged geologically including, but not limited to; weathering, regolith, lithology, structure, texture, alteration and mineralisation. Logging was at an appropriate quantitative standard for infill drilling and resource estimation.
	<p>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</p>	<ul style="list-style-type: none"> Logging is considered qualitative in nature. Diamond drill core is photographed wet before cutting.
	<p>The total length and percentage of the relevant intersections logged.</p>	<ul style="list-style-type: none"> All holes were geologically logged in full.
Sub-sampling techniques and sample preparation	<p>If core, whether cut or sawn and whether quarter, half or all core taken.</p>	<ul style="list-style-type: none"> Diamond core was sawn in half and one-half quartered and sampled over 0.2-1.2m intervals (mostly 1m).
	<p>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</p>	<ul style="list-style-type: none"> RC assay samples were collected as two 1m splits from the rig cyclone via a cone splitter. The cone splitter was horizontal to ensure sample representivity. Wet or damp samples were noted in the sample logging sheet. A majority of samples were dry.

	<p>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</p>	<ul style="list-style-type: none"> • Sample preparation is industry standard and comprises oven drying, jaw crushing and pulverising to -75 microns (80% pass).
	<p>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</p>	<ul style="list-style-type: none"> • Field duplicates were collected from AC, RC and diamond drilling at an approximate ratio of one in twenty five. • Diamond drill core field duplicates collected as ¼ core. • RC Field duplicates were collected from selected sulphide zones as a second 1m split directly from the cone splitter.
	<p>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</p>	<ul style="list-style-type: none"> • In the majority of cases the entire hole has been sampled and assayed. • Duplicate sample results were compared with the original sample results and there is no bias observed in the data.
	<p>Whether sample sizes are appropriate to the grain size of the material being sampled.</p>	<ul style="list-style-type: none"> • Drill sample sizes are considered appropriate for the style of mineralisation sought and the nature of the drilling program.
<p>Quality of assay data and laboratory tests</p>	<p>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</p>	<ul style="list-style-type: none"> • Diamond drill core and RC samples underwent sample preparation and geochemical analysis by ALS Perth. Au-Pt-Pd was analysed by 50g fire assay fusion with an ICP-AES finish (ALS Method code PGM-ICP24). A 48-element suite was analysed by ICP-MS following a four-acid digest (ALS method code ME-MS61) for holes up to and including JD023 and JRC122. Later holes were analysed using four-acid digest for 34 elements (ALS method code ME-ICP61) including Ag, Al, As, Ba, Be, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga, K, La, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Sr, Th, Ti, Tl, U, V, W, Zn, Zr. Additional ore-grade analysis was performed as required for elements reporting out of range for Ni, Cr, Cu (ALS method code ME-OG-62) and Pd, Pt (ALS method code PGM-ICP27). • These techniques are considered total digests.
	<p>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</p>	<ul style="list-style-type: none"> • Not applicable as no data from such tools or instruments are reported
	<p>Nature of quality control procedures adopted (eg. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie. lack of bias) and precision have been established.</p>	<ul style="list-style-type: none"> • Certified analytical standards and blanks were inserted at appropriate intervals for diamond, and RC drill samples with an insertion rate of >5%. Approximately 5% of significant intercepts were sent for cross laboratory checks. All QAQC samples

		display results within acceptable levels of accuracy and precision.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	<ul style="list-style-type: none"> Significant drill intersections are checked by the Project Geologist and then by the General Manager Development. Significant intersections are cross-checked with the logged geology and drill core after final assays are received.
	The use of twinned holes.	<ul style="list-style-type: none"> Six sets of twinned holes (RC versus Diamond) have been drilled to provide a comparison between grade/thickness variations over a 5m separation between drill holes. Only Palladium assays have been analysed as part of this twin hole comparison. Ni and Cu grades are very low level in the selected holes (~0.1 – 0.2% Ni and <0.1% Cu), so no meaningful correlation can be obtained. Intervals correlate well between holes although in detail there is variation between them for higher grade samples in terms of both location and grade. However, there is no discernible grade bias between drill types.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	<ul style="list-style-type: none"> Primary drill data was collected digitally using OCRIS software before being transferred to the master SQL database. All procedures including data collection, verification, uploading to the database etc are captured in detailed procedures and summarised in a single document.
	Discuss any adjustment to assay data	<ul style="list-style-type: none"> No adjustments were made to the lab reported assay data.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	<ul style="list-style-type: none"> Diamond and RC drill hole collar locations are initially recorded by Chalice employees using a handheld GPS with a +/- 3m margin of error and then picked up with an RTK-DGPS. RTK-DGPS collar pick-ups replace handheld GPS collar pick-ups and have +/-20 mm margin of error. Planned and final hole coordinates are compared after pick up to ensure that the original target has been tested.
	Specification of the grid system used.	<ul style="list-style-type: none"> The grid system used for the location of all drill holes is GDA94 - MGA (Zone 50).
	Quality and adequacy of topographic control.	<ul style="list-style-type: none"> RLs for reported holes were derived from RTK-DGPS pick-ups.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	<ul style="list-style-type: none"> Drill hole spacing varies from between 40m x 40 m in the south to 160m x 80m in the north and west.

	<p>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</p>	<ul style="list-style-type: none"> Results from the drilling to date are considered sufficient to assume geological or grade continuity appropriate for Mineral Resource estimation procedure(s) and classifications.
	<p>Whether sample compositing has been applied.</p>	<ul style="list-style-type: none"> No compositing undertaken for diamond drill core or RC samples.
Orientation of data in relation to geological structure	<p>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</p>	<ul style="list-style-type: none"> RC and Diamond drill holes were typically oriented within 15° of orthogonal to the interpreted dip and strike of the known zone of mineralisation. However, several holes were drilled at less optimal azimuths due to site access constraints or to test for alternative mineralisation orientations.
	<p>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</p>	<ul style="list-style-type: none"> The orientation of the drilling is not considered to have introduced sampling bias.
Sample security	<p>The measures taken to ensure sample security.</p>	<ul style="list-style-type: none"> Samples were collected in polyweave bags either at the drill rig (RC samples) or at the core cutting facility (diamond samples). The polyweave bags have five samples each and are cable tied. Filled bags were collected into palletised bulk bags at the field office and delivered directly from site to ALS laboratories in Wangara, Perth by a Chalice contractor several times weekly.
Audits or reviews	<p>The results of any audits or reviews of sampling techniques and data.</p>	<ul style="list-style-type: none"> CSA Global conducted a site visit and review of the sampling techniques in July 2021. SRK completed an independent assurance review of the Chalice procedures including documentation and appropriateness of methods employed.

C-2 Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p>	<ul style="list-style-type: none"> Exploration activities are ongoing over E70/5118 and 5119 and the tenements are in good standing. The holder CGM (WA) Pty Ltd is a wholly owned subsidiary of Chalice Mining Limited with no known encumbrances.
	<p>The security of the tenure held at the time of reporting along with any known</p>	<ul style="list-style-type: none"> Current drilling is on private land, all of which is owned by the Company.

Criteria	JORC Code explanation	Commentary
	impediments to obtaining a licence to operate in the area.	<ul style="list-style-type: none"> E70/5119 partially overlaps ML1SA, a State Agreement covering Bauxite mineral rights only.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul style="list-style-type: none"> There is no previous exploration at Gonneville and only limited exploration has been completed by other exploration parties in the vicinity of the targets identified by Chalice to date. Chalice has compiled historical records dating back to the early 1960's which indicate only three genuine explorers in the area, all primarily targeting Fe-Ti-V mineralisation. Over 1971-1972, Garrick Agnew Pty Ltd undertook reconnaissance surface sampling over prominent aeromagnetic anomalies in a search for 'Coates deposit style' vanadium mineralisation. Surface sampling methodology is not described in detail, nor were analytical methods specified, with samples analysed for V2O5, Ni, Cu, Cr, Pb and Zn, results of which are referred to in this announcement. Three diamond holes were completed by Bestbet Pty Ltd targeting Fe-Ti-V situated approximately 3km NE of JRC001. No elevated Ni-Cu-PGE assays were reported. Bestbet Pty Ltd undertook 27 stream sediment samples within E70/5119. Elevated levels of palladium were noted in the coarse fraction (-5mm+2mm) are reported in this release. Finer fraction samples did not replicate the coarse fraction results. A local AMAG survey was flown in 1996 by Alcoa using 200m line spacing which has been used by Chalice for targeting purposes.
Geology	Deposit type, geological setting and style of mineralisation.	<ul style="list-style-type: none"> The target deposit type is an orthomagmatic Ni-Cu-PGE sulphide deposit, within the Yilgarn Craton. The style of sulphide mineralisation intersected consists of massive, matrix, stringer and disseminated sulphides typical of metamorphosed and structurally overprinted orthomagmatic Ni sulphide deposits.
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <p>Easting and northing of the drill hole collar</p>	<ul style="list-style-type: none"> Provided in body of text.

Criteria	JORC Code explanation	Commentary
	<p>Elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</p> <p>Dip and azimuth of the hole</p> <p>Down hole length and interception depth hole length.</p>	
	<p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<ul style="list-style-type: none"> No material information has been excluded.
	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg. cutting of high grades) and cut-off grades are usually Material and should be stated.</p>	<ul style="list-style-type: none"> Significant intercepts are reported using a >0.5g/t Pd length-weighted cut off for oxide and >0.4% NiEq length-weighted cut off for sulphide material. A maximum of 4m internal dilution has been applied.
	<p>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p>	<ul style="list-style-type: none"> Higher grade intervals are reported using a >0.9g/t Pd length-weighted cut off for oxide and >0.6% NiEq length-weighted cut off. A maximum of 2m internal dilution has been applied.
Data aggregation methods	<p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<ul style="list-style-type: none"> Metal price assumptions used in the metal equivalent calculations are: US\$1,700/oz Pd, US\$1,300/oz Pt, US\$1,700/oz Au, US\$18,500/t Ni, US\$9,000/t Cu, US\$60,000/t Co. No metal equivalent calculation is reported for the oxide material. Metallurgical recovery assumptions used in the metal equivalent calculation for the sulphide (fresh) material are: Pd – 75%, Pt – 65%, Au – 50%, Ni – 60%, Cu – 80%, Co – 60%. Hence for the sulphide material NiEq = Ni % + 0.37x Pd g/t + 0.24 x Pt g/t + 0.25 x Au g/t + 0.65 x Cu % + 3.24 x Co % and PdEq = Pd g/t + 0.66 x Pt g/t + 0.67 x Au g/t + 2.71 x Ni % + 1.76 x Cu % + 8.78 x Co %. The volume of transitional material is small and considered unlikely to materially affect the overall metal equivalent calculation.
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results.</p> <p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</p>	<ul style="list-style-type: none"> RC and Diamond drill holes were typically oriented within 15° of orthogonal to the interpreted dip and strike of the known zone of mineralisation. However, several holes were drilled at less optimal azimuths due to site access constraints or to test for alternative mineralisation orientations.

Criteria	JORC Code explanation	Commentary
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg. 'down hole length, true width not known').	<ul style="list-style-type: none"> All widths are quoted down-hole. True widths vary depending on the orientation of the hole and the orientation of the mineralisation. For low grade intercepts (> 0.3g/t Pd) true width approximates downhole width. For high grade intercepts (>1g/t Pd) true width is generally between 80 and 100% of the downhole width.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	<ul style="list-style-type: none"> Refer to figures in the body of text.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	<ul style="list-style-type: none"> All holes including those without significant intercepts have been reported.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	<ul style="list-style-type: none"> Not applicable. All meaningful data has been included
Further work	The nature and scale of planned further work (eg. tests for lateral Exts or depth Exts or large-scale step-out drilling).	<ul style="list-style-type: none"> Diamond and RC drilling will continue to test high-priority targets including EM conductors. Further drilling along strike and down dip may occur at these and other targets depending on results. Scoping study work has commenced including additional metallurgical testwork, mining studies, tailings studies and waste rock characterisation etc.
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	<ul style="list-style-type: none"> Any potential extensions to mineralisation are shown in the figures in the body of the text.